
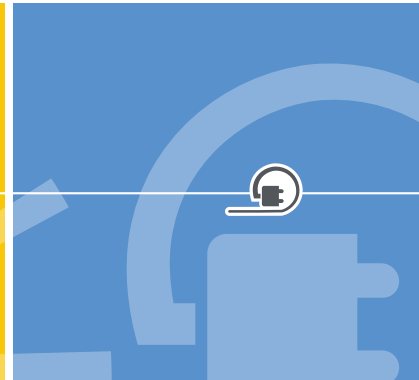
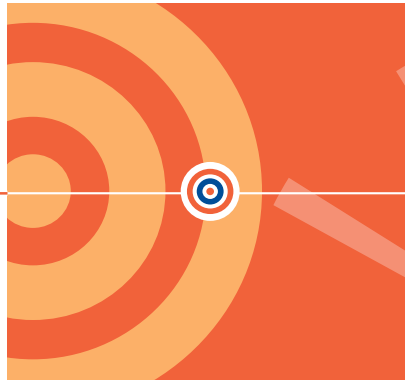


 **Light Efficient Design**



RemPhos

Solera 

breeZEV



Light Efficient Design



SCREW-IN
RETROFITS



PIN-BASE
RETROFITS




WORK
LIGHTS

LEADING THRU INNOVATION

120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS			
SHOE BOX + WALL PACK BALLAST BYPASS TYPE B											
LED-8086E30-G4		70W	20W	2800	3000K	E26	2.6" X 5.2"	cUL LISTED			
LED-8086E40-G4	LED-8086E40C-G4			2800	4000K						
LED-8086E50-G4	LED-8086E50C-G4			2880	5000K						
LED-8087E345D-G4	LED-8087E345CD-G4	100W	30W	3500/ 4200 /4300	FLEXCOLOR 3000K/ 4000K /5000K	E26	3.0" X 6.4"	cUL LISTED			
LED-8087M345D-G4	LED-8087M345CD-G4								3.0" X 6.9"	cUL LISTED	
LED-8088E345D-G4	LED-8088E345CD-G4	175W	50W	6400/ 6900 /7200			E26	3.8" X 7.9"	cUL LISTED		
LED-8088M345D-G4	LED-8088M345CD-G4									4.3" X 10.0"	cUL LISTED
LED-8089M345D-G4	LED-8089M345CD-G4										
LED-8090M345D-G4		400W	110W	14500/ 15400 /15700			EX39	4.3" X 8.3"	cUL LISTED		
HV LED-8090M345D-G4-HV					10670	3000K					
LED-8089M30-G5		250W	80W	10760	4000K	EX39	4.3" X 8.3"	cUL LISTED			
LED-8089M40-G5				10850	5000K						
LED-8089M50-G5				43380	4000K						
LED-8091M40D		1000W	320W	44610	5000K	EX39	9.0" X 12.7" (PANEL)	cUL LISTED			
LED-8091M50D				43380	4000K						
HV LED-8091M40D-HV		1000W	320W	44610	5000K	EX39	4.7" X 11.2" (DRIVER)	cUL LISTED			
HV LED-8091M50D-HV											

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD.

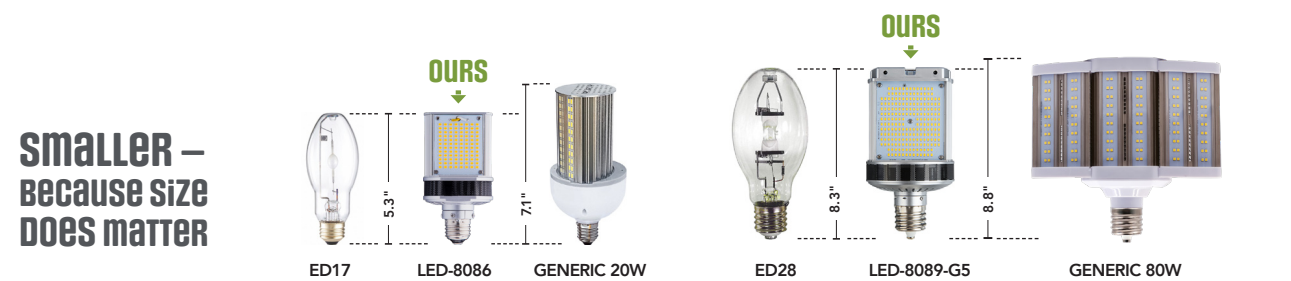

HV 277-480V INCLUDING 347V



SHOE BOX + WALL PACK




7 MODELS REPLACING UP TO 1000W HID. Retrofit almost any shoe box or wall pack fixture to energy & maintenance saving LED technology. Eliminates ballast failures. FlexColor on several models allows for less stocked inventory as well as field adjustability. Larger models include support feet to prevent socket sag.



LED-8091 ↕

↕ LED-8088



* ALSO WORKS ON 208V & 240V.

LIGHT EFFICIENT DESIGN / SCREW-IN RETROFITS

120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS		
BOLLARD + POST TOP BALLAST BYPASS TYPE B										
LED-8029E345-A-FW	LED-8029E345C-A-FW	70W/100W/150W	FLEXWATT 12W/ 18W /24W	1550-3360	FLEXCOLOR 3000K/ 4000K /5000K	E26	3.0" x 6.6"	cUL LISTED		
LED-8029M345-A-FW	LED-8029M345C-A-FW						3.0" x 6.9"		cUL LISTED	
LED-8024E345-G7-FW	LED-8024E345C-G7-FW	175W/250W/320W	FLEXWATT 35W/ 45W /60W	5140-8870			E26	3.4" x 7.4"		cUL LISTED
LED-8024M345-G7-FW	LED-8024M345C-G7-FW							3.4" x 7.8"	cUL LISTED	
LED-8027M345-G7-FW	LED-8027M345C-G7-FW	320W/400W	FLEXWATT 80W/ 100W /110W	11370-15730				EX39		3.8" x 9.5"
HV LED-8027M345-G7-FW-HV*										
LED-8037E345-A	LED-8037E345C-A	50W	11W	1550/ 1610 /1650	FLEXCOLOR 3000K/ 4000K /5000K	E26			2.6" x 5.3"	cUL LISTED
LED-8038E345-A	LED-8038E345C-A	70W	14W	1850/ 1950 /1990					2.6" x 5.3"	
LED-8039E345D-A	LED-8039E345C-A	100W	18W	2450/ 2560 /2610			2.6" x 6.3"			
LED-8039M345D-A	LED-8039M345C-A	100W	18W	2450/ 2560 /2610			EX39		2.6" x 7.0"	
LED-8033E30D-G7		175W	35W	5140	3000K	E26	3.4" x 7.2"	cUL LISTED		
LED-8033E40D-G7				5290	4000K					
LED-8033E50D-G7				5360	5000K					
LED-8033M30D-G7				5140	3000K	EX39	3.4" x 7.8"	cUL LISTED		
LED-8033M40D-G7				5290	4000K					
LED-8033M50D-G7				5360	5000K					

DEFAULT WATTAGE AND CCT FOR SUPERFLEX LAMPS ARE SHOWN IN BOLD.

superflex SWITCH BETWEEN COLOR TEMPS & WATTS

flexCOLOR SWITCH BETWEEN 3 COLOR TEMPS

SURGE ARRESTORS

PART #	DESCRIPTION	ENCLOSURE	NOM DIS CURRENT	STRIKE RATING	DIMENSIONS
SPD-277P-10KA-EC-1	10kA SURGE ARRESTOR, 120-277V, SERIES W/ THERMAL FUSE	ROUND IP65	10,000A	1@10kA, 2@6.5kA 15@3kA, 110@1.5kA	2.5" x 1.4"
SPD-347P-10KA	10kA SURGE ARRESTOR, 120-347V, SERIES W/ THERMAL FUSE	ROUND IP67			

STEP DOWN TRANSFORMERS

PART #	DESCRIPTION	MAX WATTAGE	NOM DISCHARGE CURRENT	THD	POWER FACTOR	DIMENSIONS
MTM04506224C-LW	450VA STEPDOWN TRANSFORMER	400W	480/347V IN / 277V OUT	3.4% / 3.8%	0.99	4.2" x 2.7" x 2.2"
MTM01606224C-LW	160VA STEPDOWN TRANSFORMER	140W		4.3% / 4.1%	0.99	4.2" x 2.0" x 1.6"
MTM00506224C-LW	50VA STEPDOWN TRANSFORMER	45W	480/347V IN / 240V OUT	6.2% / 6.7%	0.98 / 0.97	3.0" x 1.7" x 1.4"



FOR LISTING STATUS GO TO LED-LLC.COM

ACTIVE COOLING HV 277-480V INCLUDING 347V

BOLLARD + POST TOP



7 MODELS REPLACING UP TO 400W HID. Keep the look and feel of your HID post top and bollard fixtures, while saving energy and maintenance costs. Several models feature FlexWATT and FlexCOLOR allowing for substantial sku reduction and in-field adjustability. Our retrofits are small in size so they fit in almost any fixture.



FLEXCOLOR ->



← LED-8038



← **SUPERFLEX** —
FLEXIBILITY OF 9 LAMPS in 1

← LED-8024



5 YEAR WARRANTY



120/277V

*



ACTIVE COOLING**



80+ CRI



ENCLOSED FIXTURES



OPERATING TEMP

-40°F TO 122°F



DAMP LOCATION ENVIRONMENT



L70 50,000hrs RATED LIFE

* ALSO WORKS ON 208V & 240V. ** EXCLUDES 8037-39 MODELS.

LIGHT EFFICIENT DESIGN / SCREW-IN RETROFITS

120-277V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
BOLLARD + POST TOP BALLAST BYPASS TYPE B							
LED-8015E30-G2	100W INC	14W	1792	3000K	E26	2.6" x 5.3"	
LED-8015E40-G2			1918	4000K			
LED-8015E50-G2			1960	5000K			
LED-8017E30-G2-DIM*	150W INC	20W	2540	3000K	E26	2.6" x 5.3"	
LED-8017E40-G2-DIM*			2720	4000K			
LED-8017E50-G2-DIM*			2760	5000K			
LED-8017E345-G3	150W INC	20W	2400/ 2700 /2600	FLEXCOLOR 3000K/4000K/5000K	E26	2.8" x 5.5"	
LED-8018E345-G3	200W INC	25W	3000/ 3375 /3250		E26	2.8" x 5.5"	
LED-8019E345-G3	300W INC	35W	4200/ 4725 /4550		E26	3.4" x 6.8"	
LED-8019M345-G3	175W HID		4200/ 4725 /4550		EX39	3.4" x 7.1"	
LED-8020M345-G3	250W HID	45W	5400/ 6075 /5850		EX39	3.9" x 7.9"	
LED-8021M345-G3	320W HID	65W	7800/ 8775 /8450		EX39	4.7" x 9.2"	
LED-8065E40-F	175W HID	35W	5000	4000K	E26	3.5" x 8.8"	
LED-8065M40-F					EX39	3.5" x 9.5"	

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD.

* LED-8017-G2-DIM IS 120V ONLY. DIMMABLE ON MOST 120V LED RATED DIMMERS, PLEASE SEE WEBSITE FOR LIST OF COMPATIBLE DIMMERS.

BOLLARD + POST TOP [FROSTED]





8 MODELS REPLACING UP TO 320W HID / 300W INC. Perfect for post top and bollard fixtures, these retrofits feature frosted lenses and shapes that closely mimic the outgoing lamp technology. Because of their traditional shapes, several feature Energy Star.



LED-8018 →

← LED-8065



DIMMABLE INC INCANDESCENT

* 8065 MODELS HAVE A 3 YEAR WARRANTY. ** ALSO WORKS ON 208V & 240V. LED-8017-G2-DIM IS 120V ONLY. *** RATED LIFE IS 25,000HRS FOR 8065 MODELS.

LIGHT EFFICIENT DESIGN / SCREW-IN RETROFITS

HIGH BAY + LOW BAY



120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
HIGH BAY BALLAST BYPASS TYPE B								
LED-8136M40D	LED-8136M40CD	250W	90W	12400	4000K	EX39	8.7" X 9.3"	
LED-8136M50D	LED-8136M50CD			12900	5000K			
LED-8132M40D	LED-8132M40CD	400W	135W	18600	4000K	EX39	8.7" X 10"	
LED-8132M50D	LED-8132M50CD			19200	5000K			
LED-8130M40D	LED-8130M40CD	400W	150W	20900	4000K	EX39	8.7" X 10"	
LED-8130M50D	LED-8130M50CD			21200	5000K			
HIGH BAY BALLAST COMPATIBLE TYPE A								
LED-8236M345D	LED-8236M345CD	250W	95W	13700/14400/14600	FLEXCOLOR 3000K/4000K/5000K	EX39	8.7" X 9.7"	
LED-8232M345D		400W	140W	19900/20900/21100		EX39	8.7" X 10.5"	
HV LED-8232M345D-HV		1000W	270W	38400		EX39	10.3" X 12.5"	
LED-8242M40D					EX39	10.3" X 12.5"		
LED-8242M50D								
HV LED-8242M40D-HV								
HV LED-8242M50D-HV				38700	5000K	EX39		
HIGH BAY BALLAST COMPATIBLE TYPE A								
LED-8030M40-MHBC		400W	140W	18619	4000K	EX39	9.1" X 9.2"	
LED-8030M57-MHBC				17047				
LOW BAY BALLAST BYPASS TYPE B								
LED-8056E40D-A		175W	45W	5334	4000K	E26	5.7" X 6.9"	
LED-8056E50D-A				5560	5000K			
LED-8056M40D-A				5334	4000K	EX39		
LED-8056M50D-A				5560	5000K			
LED-8035E40-A		175W	60W	6684	4000K	E26	5.7" X 7.4"	
LED-8035E57-A				7062	5700K			
LED-8057M40D-A		250W	75W	9607	4000K	EX39	5.7" X 8.8"	
LED-8057M50D-A				9236	5000K			

10 MODELS REPLACING UP TO 1000W HID. Ultra-bright LED retrofits for high ceiling environments. Models w/o active cooling for open fixtures & silent operation. Models w/ active cooling are safe to install in enclosed fixtures. Low bay retrofits are ideal for ceilings fixtures that require light to be pushed down & out. Angled LED panels help direct light exactly where it is needed.



← LED-8236-345

LED-8056 ↗

OPEN FIXTURE ONLY ENCLOSED FIXTURES INCLUDES UPLIGHT HV 277/480V INCLUDING 347V



* EXCLUDES 8030 AND 8035 MODELS. ** EXCLUDES 8100 MODELS.



LIGHT EFFICIENT DESIGN / SCREW-IN RETROFITS

SOX + HAZARDOUS LOCATION



120-277V PART #	347V PART #	REPLACES	WATTAGE		LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS		
SOX BALLAST BYPASS TYPE B											
LED-8100-22K		35W	20W		2030	2200K	B22D	12.2" X 2.8"	UL LISTED		
LED-8100-40K					3022	4000K		16.7" X 2.87"			
LED-8101-22K		55W	35W		3232	2200K					
LED-8101-40K					5156	4000K					
LED-8102-22K		90W	60W		5769	2200K		20.5" X 2.8"			
LED-8102-40K					8198	4000K					
LED-8104-22K		180W	100W		11576	2200K		43.5" X 2.8"			
LED-8104-40K					11576	4000K					
LED-8100-AMB			35W	20W		NA		AMBER		12.2" X 2.8"	
LED-8101-AMB										55W	
LED-8102-AMB			90W	60W							
LED-8104-AMB										180W	
HAZARDOUS LOCATION BALLAST BYPASS TYPE B											
LED-8929E57-HAZ	LED-8929E57C-HAZ	150W	24W		3425	5700K	E26	3.0" X 6.6"	UL LISTED		
LED-8929M57-HAZ	LED-8929M57C-HAZ						EX39	3.0" X 6.9"	UL LISTED		
LED-8924E50-HAZ	LED-8924E50C-HAZ	250W	49W (347V)	45W (120/277V)	6620	5000K	E26	3.4" X 7.8"	UL LISTED		
LED-8924M50-HAZ	LED-8924M50C-HAZ						EX39	3.4" X 7.8"	UL LISTED		

DEFAULT WATTAGE AND CCT FOR SUPERFLEX LAMPS ARE SHOWN IN BOLD.

THE MOST UNIQUE RETROFITS, BROUGHT TO YOU BY THE LEADER! Hazardous location fixtures are expensive, retrofitting them w/ UL approved lamps is NOT. Two wattages to choose from. SOX retrofits in 4 lengths to adequately fill out the long, narrow fixtures.



← LED-8101

← LED-8924



ENCLOSED FIXTURES LISTED FOR CLASS 1, DIV 2 HAZ LOCATIONS (SEE OUR WEBSITE FOR A LIST OF APPROVED FIXTURE) SUPPORT HARNESS INCLUDED TO ELIMINATE SOCKET SAG

* ALSO WORKS ON 208V & 240V.

LIGHT EFFICIENT DESIGN / SCREW-IN RETROFITS

120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BEAM ANGLE	BASE	DIMENSIONS	LISTINGS
RECESSED CAN BALLAST BYPASS TYPE B									
LED-8054E27-G2		150W INC 100W HID	30W	2500	2700K	140°	E26	4.2" X 4.8"	UL LISTED DALI DIMMABLE
LED-8054E35-G2				3000	3500K				
LED-8054E40-G2				3000	4000K				
LED-8054E50-G2				3000	5000K				
LED-8054E35-G2-DIM*		150W INC 100W HID	30W	3000	3500K		E26	4.2" X 4.8"	UL LISTED DALI DIMMABLE
LED-8054E40-G2-DIM*				3000	4000K				
LED-8054E50-G2-DIM*				3000	5000K				
LED-8045M42		LED-8045M42C	175W HID	50W HID	4341		4200K	E39	4.5" X 7.8"
LED-8045M50	LED-8045M50C	4886			5000K				

* LED-8054-G2-DIM ARE 120V ONLY. DIMMABLE ON MOST 120V LED RATED DIMMERS, PLEASE SEE WEBSITE FOR LIST OF COMPATIBLE DIMMERS.

120 PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BEAM ANGLE	BASE	DIMENSIONS	LISTINGS
PAR 56 RETROFIT LAMPS BALLAST BYPASS TYPE B									
LED-7356-SP30**		300W HALOGEN	40W	3500	3000K	15°	GX16d	7.0" X 5.0"	UL LISTED DALI DIMMABLE
LED-7356-SP40**					4000K				
LED-7356-SP50**					5000K				
LED-7356-NF30**					3000K				
LED-7356-NF40**					4000K	25°			
LED-7356-NF50**					5000K				
LED-7356-FL30**					3000K	40°			
LED-7356-FL40**					4000K				
LED-7356-FL50**	5000K								

** LED-7356 ARE 120V ONLY. DIMMABLE ON MOST 120V LED RATED DIMMERS, PLEASE SEE WEBSITE FOR LIST OF COMPATIBLE DIMMERS.

OPEN FIXTURE ONLY
 ENCLOSED FIXTURES
 ACTIVE COOLING
 DIMMABLE
 INCANDESCENT



RECESSED CAN

+ PAR 56



4 MODELS REPLACING 100W HID/150W INC & 300W HALOGEN. Recessed can & PAR 56 fixtures are one of the most common ways to light any commercial space, we have you covered with both screw-in and pin-base options. Our dimmable models will help save even more energy and make interior spaces more appealing.



← FOR ULTRA-HIGH CEILINGS

← LED-8045

↕ LED-8054



← LED-7356



* DIMMABLE OPTIONS ARE 120V ONLY.

LIGHT EFFICIENT DESIGN / SCREW-IN RETROFITS + PIN-BASE RETROFITS



2
PIN

4
PIN

TYPE A/B PL LAMPS	TYPE B PL LAMPS	MOUNTING	TYPE A/B PL LAMPS	TYPE A PL LAMPS	TYPE B PL LAMPS
<p>5W LED-7300 REPLACES 9W GX23</p>	<p>7W LED-7310-G3 REPLACES 32W G24d [GX24q/4 PIN]</p>			<p>10W LED-7330 REPLACES 26W G24q/GX24q</p>	<p>7W LED-7310-G3 REPLACES 32W G24q [G24d/2 PIN]</p> <p>23W LED-7340 REPLACES 42W 2G11</p>
<p>7W LED-7311-G3 REPLACES 13W G23-2</p> <p>7W LED-7312-G3 REPLACES 13W GX23-2</p> <p>7W LED-7322-G3 REPLACES 26W G24d</p>			<p>10W LED-7320-G3 REPLACES 42W G24q/GX24q</p> <p>11W LED-7324-G3 REPLACES 42W G24q/GX24q</p>	<p>11W LED-7334-G3 REPLACES 26W G24q/GX24q</p>	
			<p>12W LED-7318 REPLACES 26W G24q/GX24q</p>	<p>12W LED-7338 REPLACES 26W G24q/GX24q</p>	<p>25W LED-7342 REPLACES 42W G24q/GX24q</p>



OVER A DOZEN MODELS FOR THE PERFECT SOLUTION. Our latest pin-based LED retrofits are perfect for PL applications, and provide a long-lasting LED alternative for recessed areas in offices, hotels, lobbies, schools, etc. TYPE A/B, A and B to choose from, in several shapes.




HIGHEST QUALITY PIN-BASED RETROFITS FOR ANY APPLICATION

← LED-7320

SAFE FOR ENCLOSED FIXTURES
 OMNI-DIRECTIONAL
 VERTICAL
 HORIZONTAL

* ALSO WORKS ON 208V & 240V.



LIGHT EFFICIENT DESIGN / PIN-BASE RETROFITS

PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	MOUNTING	DIMENSIONS	LISTINGS
PL UNIVERSAL TYPE A/B								
LED-7300-27K-G2	9W 2-PIN	5W	550	2700K			5.5" X 1.4"	
LED-7300-35K-G2				3500K				
LED-7300-40K-G2				4000K				
LED-7300-50K-G2				5000K				
LED-7311-27K-G3	13W 2-PIN	7W	840	2700K			5.9" X 1.3"	
LED-7311-35K-G3			880	3500K				
LED-7311-40K-G3			910	4000K				
LED-7311-50K-G3			920	5000K				
LED-7312-27K-G3	13W 2-PIN	7W	820	2700K			5.9" X 1.3"	
LED-7312-35K-G3			870	3500K				
LED-7312-40K-G3			880	4000K				
LED-7312-50K-G3			910	5000K				
LED-7318-27A	26W 4-PIN CFL	12W	837	2700K			3.8" X 3.0"	
LED-7318-35A			1157	3500K				
LED-7318-40A			1198	4000K				
LED-7322-27K-G3	26W 2-PIN	7W	820	2700K			5.7" X 1.3"	
LED-7322-35K-G3			870	3500K				
LED-7322-40K-G3			900	4000K				
LED-7322-50K-G3			930	5000K				
LED-7320-27K-G3	42W 4-PIN CFL	10W	1350	2700K			6.9" X 1.3"	
LED-7320-35K-G3			1550	3500K				
LED-7320-40K-G3			1600	4000K				
LED-7320-50K-G3			1635	5000K				
LED-7324-27K-G3	42W 4-PIN CFL	11W	1050	2700K			5.6" X 1.3"	
LED-7324-35K-G3			1125	3500K				
LED-7324-40K-G3			1200	4000K				
LED-7324-50K-G3			1200	5000K				


* G24q BASE CAN BE USED ONLY w/LED-7318 IF BYPASSING THE BALLAST.

PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	MOUNTING	DIMENSIONS	LISTINGS
PL BALLAST COMPATIBLE TYPE A								
LED-7330-27K-G2	26W 4-PIN CFL	10W	760	2700K			6.8" X 1.3"	
LED-7330-35K-G2			850	3500K				
LED-7330-40K-G2			916	4000K				
LED-7334-27K-G3	32W 4-PIN CFL	12W	1100	2700K			5.8" X 1.4"	
LED-7334-35K-G3			1100	3500K				
LED-7334-40K-G3			1100	4000K				
LED-7338-27A	26W 4-PIN CFL	12W	1100	2700K			3.0" X 3.8"	
LED-7338-35A			1100	3500K				
LED-7338-40A			1100	4000K				
PL + PLL BALLAST BYPASS TYPE B								
LED-7310-27K-G3	32W 2-PIN or 4-PIN CFL	7W	890	2700K			5.5" X 1.4"	
LED-7310-35K-G3			949	3500K				
LED-7310-40K-G3			970	4000K				
LED-7310-50K-G3			990	5000K				
LED-7340-30K-G2	40W 4-PIN CFL	17W	2100	3000K			22" X 1.5"	
LED-7340-35K-G2			2100	3500K				
LED-7340-40K-G2			2200	4000K				
LED-7340-50K-G2			2200	5000K				
LED-7342-27K-G2	42W 4-PIN CFL	25W	2000	2700K			4.2" X 3.7"	
LED-7342-35K-G2			2500	3500K				
LED-7342-40K-G2			2500	4000K				




UNIFORM ILLUMINATION, FROSTED LENS & MORE...

TOTALTUBE T8 MODELS INCLUDE
G3 SMARTSENSE-TLED
INTELLIGENT SAFETY SYSTEM

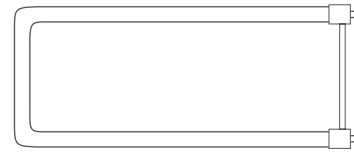

U-BEND
MODELS
AVAILABLE



DOUBLE ENDED POWER



EASY INSTALL

8' 2-PIECE T8 +



AVAILABLE IN STANDARD LENGTHS INCLUDING 8'


















ENERGY SAVING REPLACEMENTS FOR FLUORESCENT T8, T5 AND U-BEND LAMPS. Every size and installation method you need — in the highest quality, best light output design. Install our retrofits for worry-free operation for years to come.



ENERGY SAVING
REPLACEMENTS FOR ANY FACILITY



PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
T5 + T8 BALLAST COMPATIBLE TYPE A + B							
RP-TOTALTUBE-T5-2FT-835-G4	24W	12W	1350	3500K	G5 MINI BI-PIN	24.0" x 1.0"	
RP-TOTALTUBE-T5-2FT-840-G4			1500	4000K			
RP-TOTALTUBE-T5-2FT-850-G4			5000K				
RP-TOTALTUBE-T5-3FT-835-G4	39W	18W	2025	3500K	G5 MINI BI-PIN	36.0" x 1.0"	
RP-TOTALTUBE-T5-3FT-840-G4			2250	4000K			
RP-TOTALTUBE-T5-3FT-850-G4			5000K				
RP-TOTALTUBE-T5-4FT-835-G4	54W	24W	3200	3500K	G5 MINI BI-PIN	48.0" x 1.0"	
RP-TOTALTUBE-T5-4FT-840-G4			3500	4000K			
RP-TOTALTUBE-T5-4FT-850-G4			5000K				
RPT-B-TOTALTUBE-T8-G3-2FT-835-A	17W	10W	1350	3500K	G13 BI-PIN	24.0" x 1.0"	
RPT-B-TOTALTUBE-T8-G3-2FT-840-A				4000K			
RPT-B-TOTALTUBE-T8-G3-2FT-850-A				5000K			
RPT-B-TOTALTUBE-T8-G3-3FT-835-A	25W	10W	1350	3500K	G13 BI-PIN	36.0" x 1.0"	
RPT-B-TOTALTUBE-T8-G3-3FT-840-A				4000K			
RPT-B-TOTALTUBE-T8-G3-3FT-850-A				5000K			
RPT-B-TOTALTUBE-T8-G3-4FT-835-A	32W	12W	1620	3500K	G13 BI-PIN	48.0" x 1.0"	
RPT-B-TOTALTUBE-T8-G3-4FT-840-A				4000K			
RPT-B-TOTALTUBE-T8-G3-4FT-850-A				5000K			
RPT-B-TOTALTUBE-T8-G3-4FTHO-835-A	32W	15W	2025	3500K	G13 BI-PIN	48.0" x 1.0"	
RPT-B-TOTALTUBE-T8-G3-4FTHO-840-A				4000K			
RPT-B-TOTALTUBE-T8-G3-4FTHO-850-A				5000K			
RPT-B-TOTALTUBE-T8-G3-2FTU1-835-A	32W	15W	1950	3500K	G13 BI-PIN	24.0" x 2.0"	
RPT-B-TOTALTUBE-T8-G3-2FTU1-840-A				4000K			
RPT-B-TOTALTUBE-T8-G3-2FTU6-835-A	32W	15W	1950	3500K	G13 BI-PIN	24.0" x 6.0"	
RPT-B-TOTALTUBE-T8-G3-2FTU6-840-A				4000K			

PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
T8 BALLAST BYPASS TYPE B							
LED-9T8-835DE24-G3	17W	9W	1100	3500K	G13	24.0" x 1.0"	
LED-9T8-840DE24-G3				4000K			
LED-9T8-850DE24-G3				5000K			
LED-12T8-835DE36-G3	25W	12W	1400	3500K	G13	36.0" x 1.0"	
LED-12T8-840DE36-G3				4000K			
LED-12T8-850DE36-G3				5000K			
LED-12T8-835DE48-G3	32W	12W	1700	3500K	G13	48.0" x 1.0"	
LED-12T8-840DE48-G3				4000K			
LED-12T8-850DE48-G3				5000K			
LED-15T8-835DE48-G3	32W	15W	1800/1800	2100	G13	48.0" x 1.0"	
LED-15T8-840DE48-G3				4000K			
LED-15T8-850DE48-G3				5000K			
LED-18T8-840SE48-G3	32W	18W	2200	4000K	G13	48.0" x 1.0"	
LED-18T8-850SE48-G3				5000K			
LED-42T82P-840DE96-G4				54-86W			
LED-42T82P-850DE96-G4	5000K						
LED-42T82P-840HO96-G4	54-86W	42W	5040	4000K	R17D	96.0" x 1.0"	
LED-42T82P-850HO96-G4				5000K			



FOR LISTING
STATUS GO TO
LED-LLC.COM



8 MODELS REPLACING UP TO 600W HID & 900W INC. Super bright and durable, our LED work site lights reduce costs and labor with integrated power cord and daisy-chain feature. Several wattages and connection options to choose from will make lighting any work site easier than ever.

PART #	VOLTAGE	PWR CORD	DAISY-CHAIN	REPLACES	WATTAGE	LUMENS	COLOR	DIMENSIONS	LISTINGS
TEMPORARY WORK SITE LIGHTS									
LED-9006-50K	120V	20 FT POWER CORD	UP TO 10 LIGHTS	250W HID	60W	6600	5000K	6.2" X 10.7"	UL LISTED
LED-9010-50K	120V	35 FT POWER CORD	UP TO 6 LIGHTS	400W HID	100W	11000		6.2" X 12.2"	
LED-9015-50K	120V	35 FT POWER CORD	UP TO 4 LIGHTS	600W HID	150W	16500		6.2" X 13.4"	
HIGH BAY WORK SITE LIGHTS BALLAST BYPASS TYPE B									
LED-9210-50K	120-277V*	6 FT POWER CORD W/ STRIPPED LEADS	NA	400W HID	100W	12000	5000K	6.5" X 12.7"	UL LISTED
ECONOMY WORK SITE LIGHTS									
LED-9009-100-5C	120V	10 FT POWER CORD	UP TO 6 LIGHTS	400W HID	100W	12000	5000K	6.5" X 11.3"	UL LISTED
TEMPORARY WORK SITE STRING LIGHTS									
LED-9003-50K-5PK	120V	50 FT STRING	UP TO 10 STRINGS	300W INC	40W (5 X 8W)	5000/STRING	5000K	4.4" X 3.1"	E17
LED-9003-50K-10PK-163-G2	120V	100 FT STRING	UP TO 5 STRINGS	900W INC	120W (10 X 12W)	15000/STRING			
LED-9003-50K-10PK-182-G2			UP TO 3 STRINGS		120W (10 X 12W)				



* UL LISTED FOR 120-277VAC. ALSO WORKS ON 208V & 240V.



LED-9003-163



LED-9010



REMOTE CONTROL INCLUDED 2-PRONG PLUG (NEMA 1-15P) 3-PRONG PLUG (NEMA 5-15P / GROUNDED OUTLET)

* 9003 MODELS HAVE A 3 YEAR WARRANTY. ** 9210 IS UL LISTED FOR 120-277VAC, ALL OTHER MODELS ARE 120V. 9210 ALSO WORKS ON 208V & 240V. *** EXCLUDES MODEL 9210. LIGHT EFFICIENT DESIGN / WORK LIGHTS



2' & 3' PRODUCT GONDOLA

2'
(24" x 14" x 78")
LED-9902


3'
(36" x 14" x 78")
LED-9903



PRODUCT(S) ORDERED SEPARATELY


SELECTOR GUIDE & COUNTER MAT

SELECTOR GUIDE
17" x 11"



ALSO AVAILABLE W/ GROMMET AND RING CLIP FOR ATTACHING TO GONDOLA.

COUNTER MAT
24" x 17"

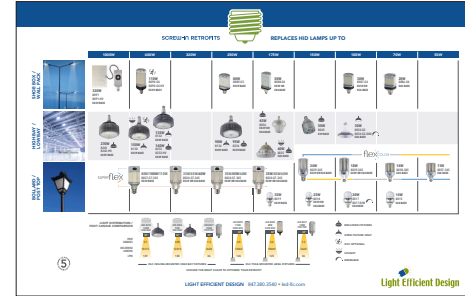

PRODUCT DEMO DISPLAYS



8" x 10" x 4"

PRODUCT(S) ORDERED SEPARATELY

SCREW-IN RETROFIT
w/FLEXCOLOR
LED-9800



6" x 10" x 16"

SCREW-IN RETROFIT
w/HORIZ & BASE-DOWN
SOCKET POSITIONS
LED-9900



16" x 5" x 10"

PIN-BASE RETROFITS
LED-9750



10" x 9" x 22"

LBI - LINEAR BARKIT
RP-LBI-G1-1F-2X-DISPLAY



9" X 9" X 16"

SOLAR WALL PACK
SL-9100

2' x 4' WALL BANNERS



SCREW-IN RETROFITS



SOLERA SOLAR



BREEZEV

33.5" X 84" BANNER STANDS



BREEZEV



LED



SOLERA

NOTE additional designs are available and graphics are updated frequently


...and **MORE** CONTACT YOUR REGIONAL MANAGER FOR A FULL LIST OF OFFERINGS



BREEZE OVER...

INNOVATION & MANUFACTURING CENTER

Home to our Product Showroom & Training Space. Located 30 minutes from Boston, in Middleton MA.

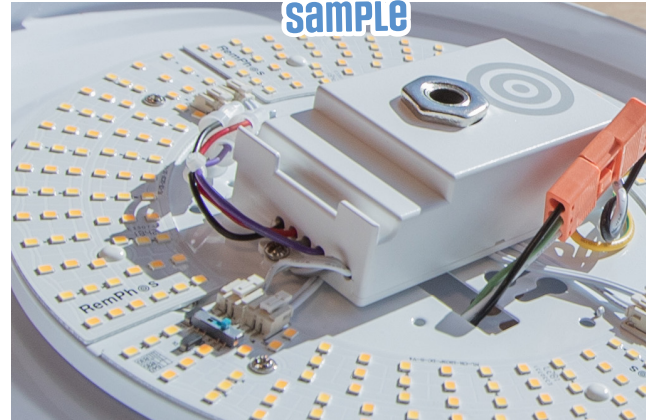

SAMPLES ARE AVAILABLE*...

Try our LED retrofits in your project with no risk. When done, simply, return in original carton within 60 days. No restocking fee, no questions asked.

EMAIL edison@led-llc.com FOR DETAILS




JOIN US...

Stay up to date with our latest product offerings, company & industry news! **FYI...we love giving away cool swag & gift cards during our PRO WORKSHOPS!**

* UP TO 4 PIECES

UNITED STATES		UNITED STATES	
1	ARCHIBALD AND MEEK N. IL / N.W. IN 630.833.7377	22	ETEL (AUSTIN) TX 512.914.0858
2	ARCHITECTURAL LIGHTING SALES E. PA 724.916.2200	23	ETEL (HOUSTON) TX 713.678.4460
3	JPR SALES KS / W. MO 913.645.8687	24	ETEL (SAN ANTONIO) TX 210.829.7153
4	ARCHWAY ELECTRICAL SALES E. MO / CENTRAL IL 314.270.8400	25	METRA ASSOCIATES FL 800.329.5555
5	ARCTIC SALES AK 907.694.7424	26	APEX ELECTRICAL SALES AZ 480.940.1010
6	ARTHUR A BOYLE COMPANY IN 317.577.9100	27	LFD CT / MA / ME / NH / RI / VT 401.323.3467
7	ASCEND SALES NYC METRO / N. NJ 908.320.0333	28	LP CHICK KY 502.964.8181
8	MOUNTAIN STATES CO / WY 505.867.5805	29	MOUNTAIN STATES NM 505.867.5805
9	CT LIGHTING & CONTROLS MT 406.899.6073	30	ONE SOURCE ASSOCIATES MD / W. DC 410.309.4900
10	ROTH LIGHTING LV / S. NV 702.534.5626	31	PACIFIC RIM CONNECTIONS HI 808.847.0007
11	EF LOMBARDI NC / SC 704.334.1637	32	PIONEER SALES ND / SD / MN / N.W. WI 763.463.5788
12	ELECTRA SALES AR / W. TN / N. MS 501.523.4015	33	RD WRIGHT UPSTATE NY 518.966.5980
13	ELECTRA SALES (OK) OK 405.543.1924	34	RIFFLE & ASSOCIATES N. OH 440.543.8257
14	ELECTRA SALES (TX) N. TX 972.554.8200	35	RIFFLE & ASSOCIATES S. OH 512.771.0002
15	ELECTRICAL PRODUCTS CO IA / NE 402.895.2001	36	ROBERT S KIMBALL WV 304.346.2005
16	ELECTRICAL SALES ASSOC TN 615.242.2774	37	SALES LANE LLC CA 858.382.7013
17	ELECTRICAL SALES ASSOC VA 804.282.1864	38	SMR GULF COAST LA 281.774.3747
18	ELECTRICAL SALES ASSOC GA 404.987.1772	39	SYNERGY E. PA / S. NJ / DE 215.428.1130
19	MAGIC CITY GROUP AL / FL PANHANDLE 205.637.3684	40	TAYLORED SALES & MARKETING OR / WA / N. ID 720.799.4435
20	ERI (NEENAH) WI 920.751.3922	41	TEAM ELECTRICAL SALES MI 313.874.1000
21	ERI (WAUKESHA) WI 262.542.6285	42	WILSON SALES UT / S. ID 801.292.4867

CANADA	
1C	ALLIANCE MARKETING LTD BRITISH COLUMBIA / CALGARY 604.205.5284 / 403.256.8649
2C	ELECTRIXWEST AGENCIES, LTD EDMONTON 780.628.5201
3C	INDUSTRIAL SOLUTIONS NET WORK SASKATCHEWAN/MANITOBA 306.242.2599
4C	ELECTRICAL SALES NETWORK ONTARIO 905.795.2525
5C	AGENCE RICARD QUEBEC 514.910.8240
6C	FOCUS ELECTRICAL SALES NEW BRUNSWICK NEWFOUNDLAND PRINCE EDWARD ISLAND 506.852.9333

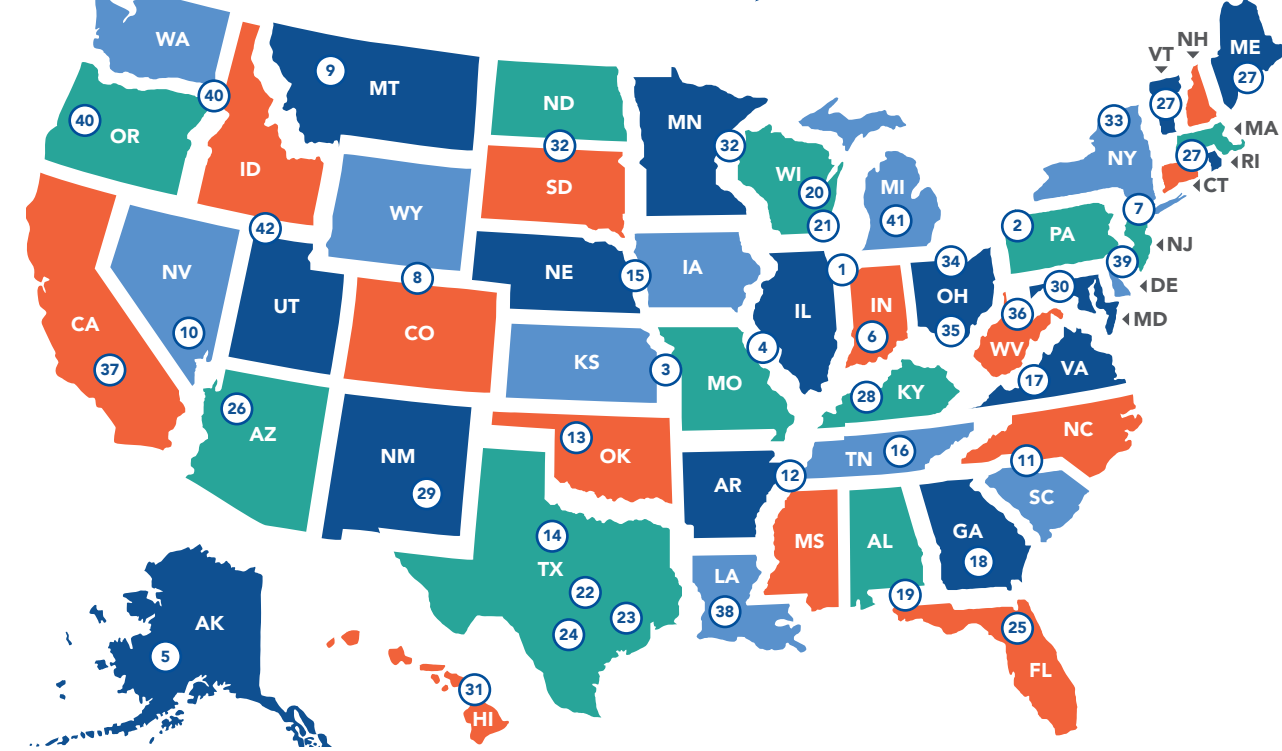

WHO'S YOUR REP?





Light Efficient Design

CORPORATE HEADQUARTERS • Cary, IL | INNOVATION & MANUFACTURING CENTER • Middleton, MA
847.380.3540 • led-llc.com • sales@led-llc.com