




ORDERING **RC-OCC-HNS-111-A** IN ADDITION TO THE LBE PART NUMBER UPGRADES THE FIXTURE WITH A FACTORY INSTALLED **SIMPLE CONTROL** UTILIZING A MICROWAVE MOTION SENSOR. IT ALSO COMES EQUIPPED WITH A DAYLIGHT HARVESTING SENSOR TO DIM AND/OR TURN OFF THE LBE WHEN THE SPACE IS UNOCCUPIED OR SURROUNDING NATURAL LIGHT LEVELS ARE HIGH.



### ATTRIBUTES

<b>DETECTION TECHNOLOGY</b>	MICROWAVE
<b>DETECTION TYPE</b>	OCCUPANCY
<b>SENSOR POWER</b>	12VDC
<b>GROUPABLE</b>	NO
<b>NETWORK LIGHTING CONTROL</b>	NO
<b>COMMISSIONING METHOD</b>	IR REMOTE
<b>REMOTE</b>	IR12
<b>DAYLIGHT HARVESTING</b>	YES
<b>HI OR LOW TRIM</b>	NO
<b>BI-LEVEL DIMMING</b>	YES
<b>NETWORK TECHNOLOGY</b>	NONE
<b>INSTALLATION TYPE</b>	INTERNAL
<b>DLC LISTED</b>	YES
<b>CONTROL CAPACITY</b>	10 FIXTURES

### IR12 REMOTE



- Permanent ON/OFF Function
- Dim+/-
- Sensor Mode
- Reset Function
- Ambient Learn
- Test Mode


FOR MORE INFORMATION ON THE IR12 REMOTE SCAN BELOW



### DETECTION PATTERN / RC-OCC-HNS-111-A


#### CEILING MOUNTING

DETECTION RANGE (FT)

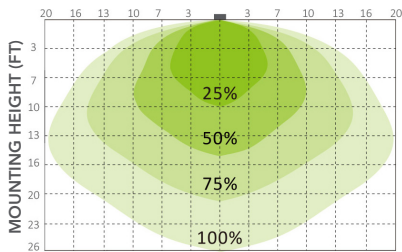

#### WALL MOUNTING

DETECTION DISTANCE (FT)

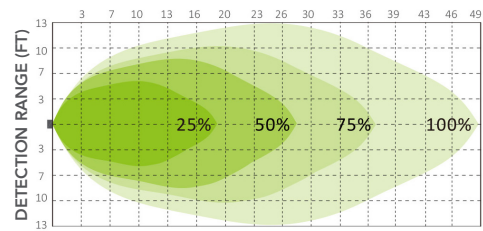

### DAYLIGHT HARVESTING / RC-OCC-HNS-111-A

Sensor detects the difference between natural light and artificial light (lamp) from behind the diffuser, switch on automatically (even without movements) when the ambient light is below the target value, and switch off automatically whenever the artificial light is not required (ambient light meets target level).

**NOTE** LUX-OFF SAMPLING TIME - 30S. LUX-ON SAMPLING TIME - 10S. LUX-ON FUNCTION WILL ONLY OPERATE WITHOUT MOTION WHEN STANDBY IS SET TO + ∞.

