




Light Efficient Design.

RemPhos®

Solera®


LED LIGHTING SOLUTIONS


Light Efficient Design  **LEADING THRU INNOVATION**

 **SCREW-IN RETROFITS**  **PIN-BASE RETROFITS**  **WORK LIGHTS**

PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	FEATURES	DIMENSIONS	LISTINGS	
BOLLARD + POST TOP BALLAST BYPASS TYPE B										
LED-8037E345-A	120-277V	50W	11W	1550/1610/1650	FLEXCOLOR 3000K/4000K/5000K	E26		2.6 IN x 5.3 IN	 	
LED-8038E345-A		70W	14W	1850/1950/1990				2.6 IN x 6.3 IN		
LED-8038E345C-A	220-347V									
LED-8039E345D-A	120-277V	100W	18W	2450/2560/2610				EX39		2.6 IN x 7.0 IN
LED-8039E345C-A	220-347V									
LED-8039M345D-A	120-277V									
LED-8039M345C-A	220-347V									
LED-8029E345-A-FW	120-277V	UP TO 150W	FLEXWATT 12W/18W/24W	1550-3360	FLEXCOLOR 3000K/4000K/5000K	E26		3.0 IN x 6.6 IN	 	
LED-8029E345C-A-FW	220-347V					EX39		3.0 IN x 6.9 IN		
LED-8029M345-A-FW	120-277V									
LED-8029M345C-A-FW	220-347V									
LED-8024E345-G7-FW	120-277V	UP TO 320W	FLEXWATT 35W/45W/60W	5140-8870		E26	HV	3.4 IN x 7.4 IN		
LED-8024E345C-G7-FW	220-347V					EX39		3.4 IN x 7.8 IN		
LED-8024M345-G7-FW	120-277V									
LED-8024M345-G7-FW-HV	277-480V									
LED-8027M345-G7-FW	120-277V	UP TO 400W	FLEXWATT 80W/100W/110W	11370-15730			HV	3.8 IN x 9.5 IN		
LED-8027M345-G7-FW-HV	277-480V		FLEXWATT 110W/135W/150W	15000-21000				4.0 IN x 8.3 IN		PENDING
LED-8028M345-G7-FW	120-277V									
LED-8075M345-FW	120-277V	UP TO 750W	FLEXWATT 150W/200W/270W	21700-39000	FLEXCOLOR 3000K/4000K/5000K	EX39		5.6 IN x 12.3 IN	 	
LED-8075M345-FW-HV	277-480V									
LED-8000M345-FW-MV	208-347V	UP TO 1000W	FLEXWATT 300W/360W/450W	50100-73300			MV			
LED-8000M345-FW-HV	277-480V						HV			

DEFAULT WATTAGE AND CCT FOR SUPERFLEX LAMPS ARE SHOWN IN BOLD

SIZE COMPARISON

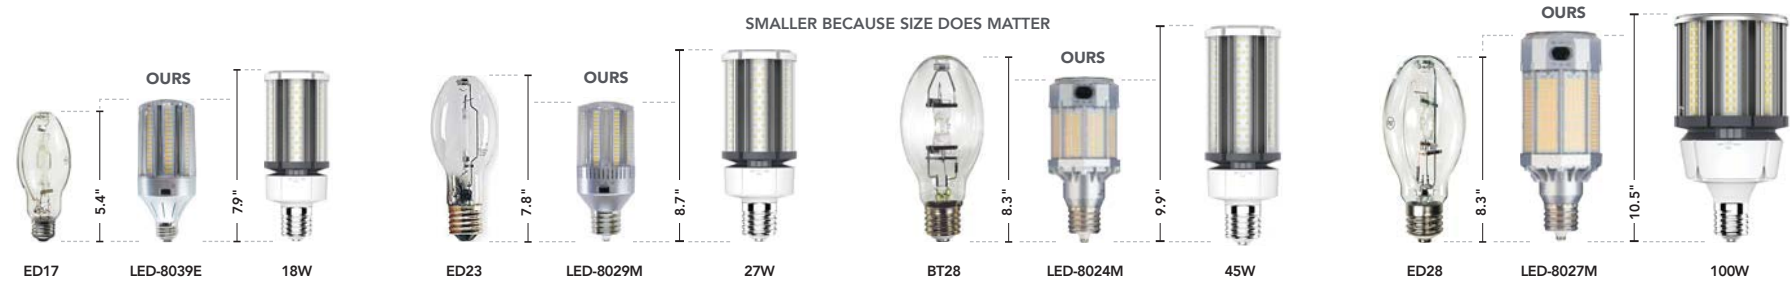

 ACTIVE COOLING  277-480V INCLUDING 347V  208-347V  FOR LISTING STATUS GO TO LED-LLC.COM 120-277V ALSO WORKS ON 208V & 240V

BOLLARD + POST TOP



9 MODELS REPLACING UP TO 1000W HID. Keep the look and feel of your existing fixture, while saving energy and maintenance costs. Several models feature FLEXWATT and FLEXCOLOR allowing for substantial sku reduction and in-field adjustability.



LED-8038 ➔



LED-8000 ➔

LED-8024 ➔

LED-8000 – MULTIPLE VOLTAGE OPTIONS

& LONGER NECK FOR A BETTER FIT



* EXCLUDES 8037-39 MODELS

LIGHT EFFICIENT DESIGN / SCREW-IN RETROFITS



BOLLARD + POST TOP



11 MODELS REPLACING UP TO 400W HID. Perfect for post-top and bollard fixtures, these retrofits feature a shape that closely mimics traditional lamp technology. 801X and 802X models feature frosted lenses for a classic lamp-like appearance.



LED-8018 ➔

FROSTED LENS



➔ LED-8062

AVAILABLE IN 2200K, 4000K & 5000K

120-277V PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	FEATURES	DIMENSIONS	LISTINGS	
BOLLARD + POST TOP BALLAST BYPASS TYPE B										
LED-8017E345-G3	120-277V	100W (150W INC)	20W	2400/ 2700 /2600	FLEXCOLOR 3000K/ 4000K /5000K	E26		2.6 IN x 5.5 IN	 	
LED-8018E345-G3		150W (200W INC)	25W	3000/ 3375 /3250				3.4 IN x 6.8 IN		
LED-8019E345-G3		175W (300W INC)	35W	4200/ 4725 /4550				3.4 IN x 7.1 IN		
LED-8019M345-G3		175W				3.9 IN x 7.9 IN				
LED-8020M345-G3		250W	45W	5400/ 6075 /5850		EX39		3.9 IN x 7.9 IN		
LED-8021M345-G3		320W	65W	7800/ 8775 /8450				4.7 IN x 9.2 IN		
LED-8060E22	120-277V	100W	15W	2250	2200K	E26		2.2 IN x 6.4 IN	 	
LED-8060E40				2700	4000K			3.0 IN x 7.6 IN		
LED-8060E50					5000K					
LED-8061E22		150W	28W	3500	2200K	E26		3.0 IN x 7.6 IN		
LED-8061E40				4000	4000K					
LED-8061E50					5000K					
LED-8062M22		175W	32W	4500	2200K	EX39		3.5 IN x 9.4 IN		
LED-8062M40				5500	4000K			3.5 IN x 9.4 IN		
LED-8062M50					5000K					
LED-8063M22		250W	45W	6000	2200K	EX39		3.5 IN x 9.4 IN		
LED-8063M40				7500	4000K			4.9 IN x 9.4 IN		
LED-8063M50					5000K					
LED-8064M22		320W	54W	8000	2200K	EX39		4.9 IN x 9.4 IN		
LED-8064M40				10000	4000K			4.8 IN x 11.5 IN		
LED-8064M50					5000K					
LED-8065M22		400W	85W	13600	2200K	EX39		4.8 IN x 11.5 IN		
LED-8065M40				15725	4000K					
LED-8065M50					5000K					

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD

5 YEAR WARRANTY

UL TYPE B
BALLAST BYPASS

80+
CRI

ENCLOSED
FIXTURES

-40°F TO 113°F
OPERATING TEMP

50,000hrs
RATED LIFE





PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	FEATURES	DIMENSIONS	LISTINGS	
SHOE BOX + WALL PACK BALLAST BYPASS TYPE B										
LED-8087E345D-G4	120-277V	100W	30W	3500/ 4200 /4300	FLEXCOLOR 3000K/ 4000K /5000K	E26		3.0 IN x 6.4 IN	 	
LED-8087E345CD-G4	220-347V					EX39		3.0 IN x 6.9 IN		
LED-8087M345D-G4	120-277V							3.0 IN x 6.9 IN		
LED-8087M345CD-G4	220-347V							3.0 IN x 6.9 IN		
LED-8088E345D-G4	120-277V	175W	50W	6400/ 6900 /7200		E26		3.8 IN x 7.9 IN		
LED-8088E345CD-G4	220-347V					EX39		3.8 IN x 8.5 IN		
LED-8088M345D-G4	120-277V							3.8 IN x 8.5 IN		
LED-8088M345CD-G4	220-347V							3.8 IN x 8.5 IN		
LED-8089M345D-G4	120-277V	250W	80W	10600/ 10700 /10800		EX39		4.3 IN x 10.0 IN		
LED-8089M345CD-G4	220-347V									4.3 IN x 10.0 IN
LED-8090M345D-G4	120-277V	400W	110W	14500/ 15400 /15700				HV⚡		
LED-8090M345D-G4-HV	277-480V									

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD

SIZE COMPARISON

LIGHT DISTRIBUTION / FOOT CANDLE COMPARISON / DLC POLE-MOUNTED FIXTURES

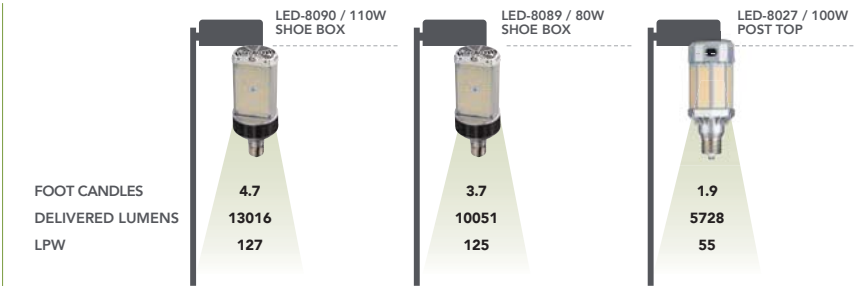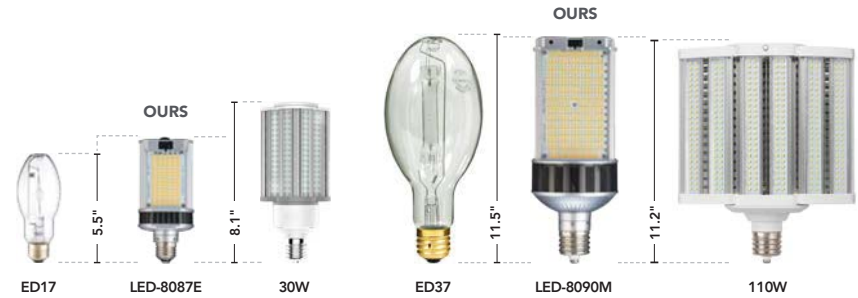

4 MODELS REPLACING UP TO 400W HID. Retrofit almost any shoe box or wall pack fixture to energy & maintenance saving LEDs. Eliminate ballast failures. FLEXCOLOR on several models allows for less stocked inventory as well as field adjustability.



LED-8088

ROTATABLE BASE

DIRECTS LUMENS OUT OF FIXTURE

- 5 YEAR WARRANTY
- ACTIVE COOLING
- 80+ CRI
- ENCLOSED FIXTURES
- OPERATING TEMP: -40°F TO 122°F
- ENVIRONMENT: DAMP LOCATION
- 50,000hrs RATED LIFE (L70)


HIGH BAY + LOW BAY



PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	FIXTURE	FEATURES	DIMENSIONS	LISTINGS		
HIGH BAY BALLAST BYPASS TYPE B												
LED-8130M40D	120-277V	400W	150W	20900	4000K	EX39			8.7 IN x 10 IN	 		
LED-8130M40CD	220-347V											
LED-8130M50D	120-277V			21200	5000K							
LED-8130M50CD	220-347V											
LED-8236M345D	120-277V	250W	95W	13700/ 14400 /14600	FLEXCOLOR 3000K/ 4000K /5000K	EX39			8.7 IN x 9.7 IN	 		
LED-8236M345CD	220-347V								8.7 IN x 10.5 IN			
LED-8232M345D	120-277V	400W	140W	19900/ 20900 /21100								
LED-8232M345D-HV	277-480V											
LED-8242M50D	120-277V	1000W	270W	38700	5000K				10.3 IN x 12.5 IN			
LED-8242M50D-HV	277-480V											
LOW BAY BALLAST BYPASS TYPE B												
LED-8056E50D-A	120-277V	175W	45W	5560	5000K	E26			5.7 IN x 6.9 IN	 		
LED-8056M50D-A				5560	5000K	EX39			5.7 IN x 7.4 IN			
LED-8035E57-A					60W	7062		5700K	E26			7.9 IN x 6.0 IN


DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD

LIGHT DISTRIBUTION / FOOT CANDLE COMPARISON / DLC CEILING-MOUNTED HIGH BAY FIXTURES

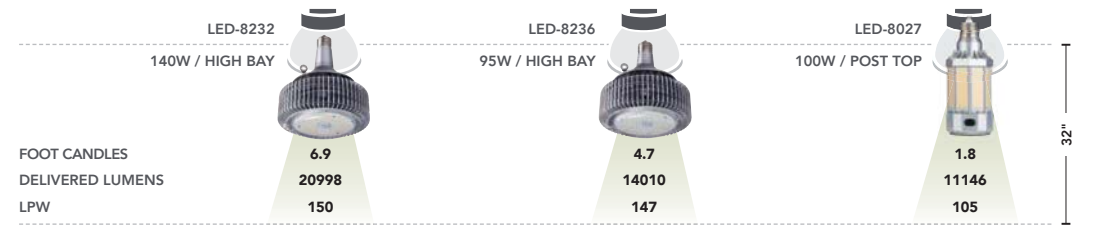

SURGE PROTECTION*

6 MODELS REPLACING UP TO 1000W HID. Ultra-bright LED retrofits for high ceiling environments. Models w/o active cooling for open fixtures & silent operation. Models w/ active cooling are safe to install in enclosed fixtures. Low bay retrofits are ideal for ceiling fixtures that require light to be pushed down and out. Angled LED panels help direct light exactly where it is needed.

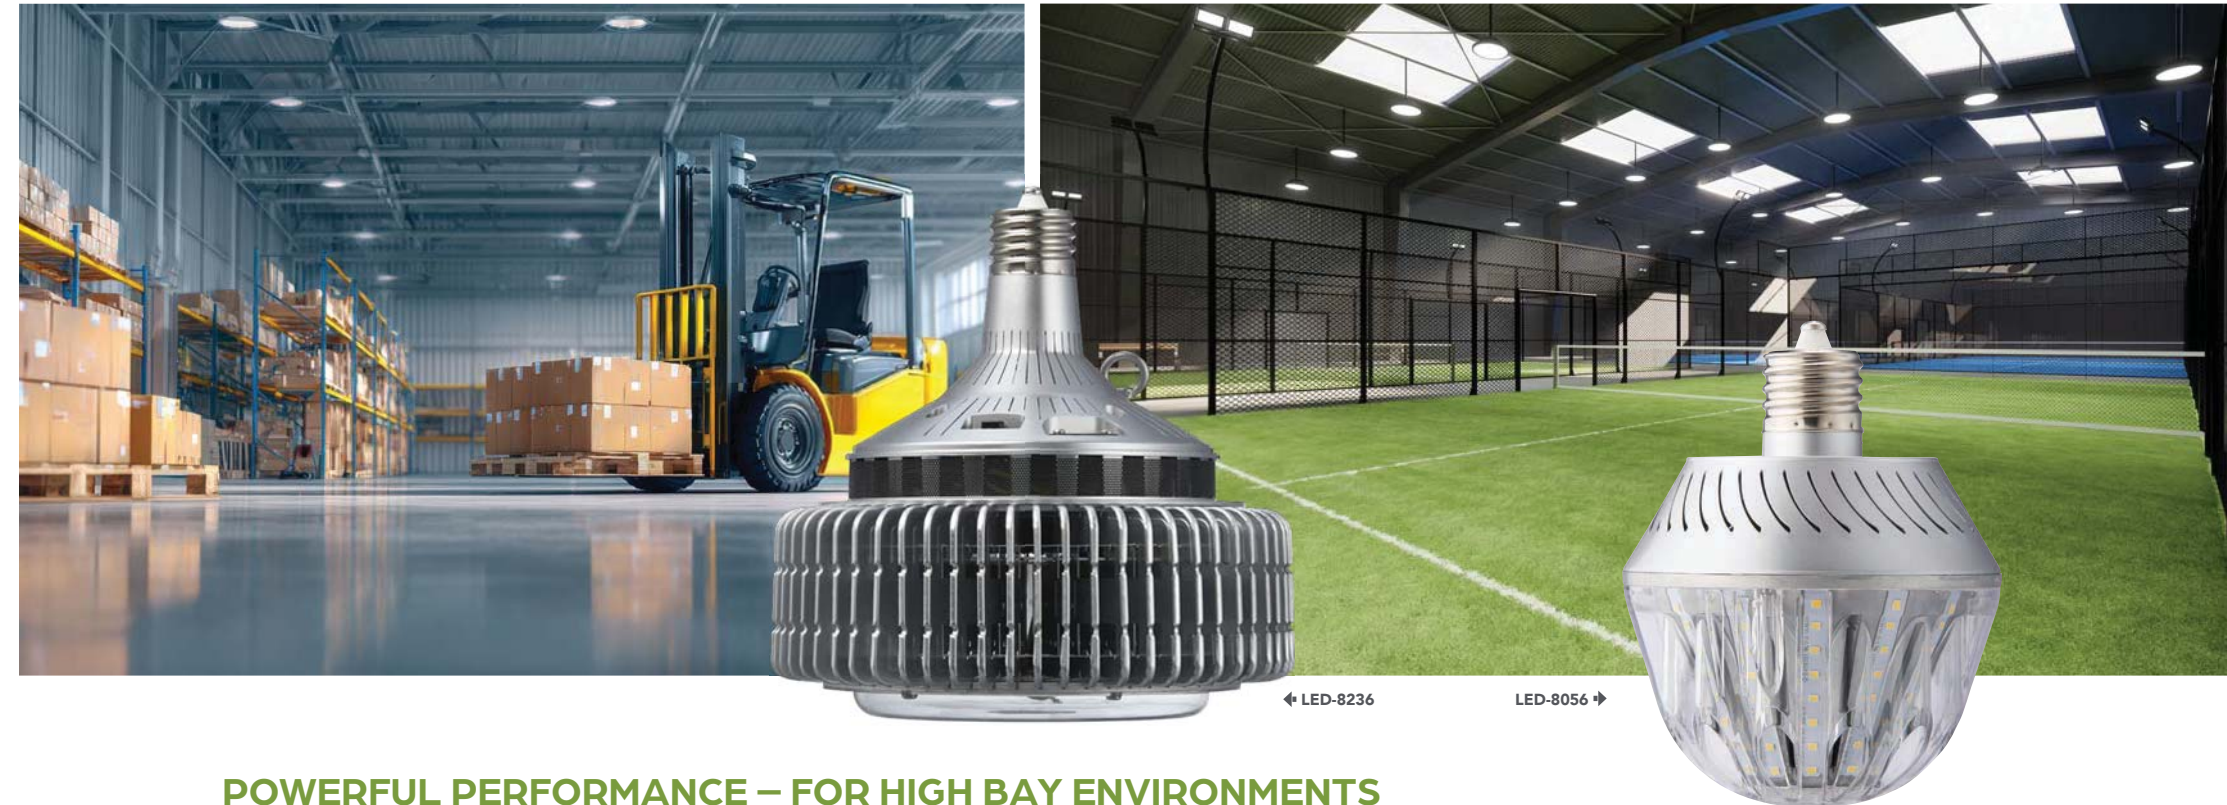

POWERFUL PERFORMANCE – FOR HIGH BAY ENVIRONMENTS



5 YEAR WARRANTY



0-10V DIMMING**



12V AUX PORT**



80+ CRI



-40°F TO 122°F OPERATING TEMP



ACTIVE COOLING***



50,000hrs RATED LIFE



HAZARDOUS LOCATION




3 MODELS REPLACING UP TO 400W HID. Hazardous location fixtures are expensive, retrofitting them w/ UL approved lamps is NOT. Three wattages to choose from. Available in 5000K and 5700K for brighter, safer environments.

PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	FIXTURE	FEATURES	DIMENSIONS	LISTINGS
HAZARDOUS LOCATION BALLAST BYPASS TYPE B										
LED-8929U57-HAZ	120-277V	150W	24W	3425	5700K	E26*			3.0 IN x 6.6 IN	
LED-8929U57C-HAZ	220-347V								3.4 IN x 7.4 IN	
LED-8924U50-HAZ	120-277V	250W	45W	6620	5000K				3.4 IN x 7.4 IN	
LED-8924U50C-HAZ	220-347V									
LED-8990M50-HAZ	120-277V	400W	110W	14570	5000K	EX39				4.3 IN x 11.4 IN
LED-8990M50-HAZ-HV	277-480V									

* EDISON TO MOGUL (E26 TO E39) ADAPTER INCLUDED

SURGE ARRESTORS					
PART #	DESCRIPTION	ENCLOSURE	NOMINAL DISCHARGE CURRENT	STRIKE RATING	DIMENSIONS
SPD-277P-10KA-EC-1	10kA SURGE ARRESTOR, 120-277V, PARALLEL	ROUND IP65	10,000A	1@10kA, 2@6.5kA 15@5kA, 110@1.5kA	2.5 IN x 1.4 IN
SPD-347P-10KA	10kA SURGE ARRESTOR, 120-347V, PARALLEL	ROUND IP67			

STEP-DOWN TRANSFORMERS						
PART #	DESCRIPTION	MAX WATTAGE	VOLTAGE	THD	POWER FACTOR	DIMENSIONS
MTM04506224C-LW	450VA STEP-DOWN TRANSFORMER	400W	480/347V IN / 240V OUT	3.4% / 3.8%	0.99	4.1 IN x 2.6 IN x 2.2 IN
MTM01606224C-LW	160VA STEP-DOWN TRANSFORMER	140W		4.3% / 4.1%	0.99	4.3 IN x 1.9 IN x 1.6 IN
MTM00506224C-LW	50VA STEP-DOWN TRANSFORMER	45W		6.2% / 6.7%	0.98 / 0.97	3.0 IN x 1.7 IN x 1.3 IN

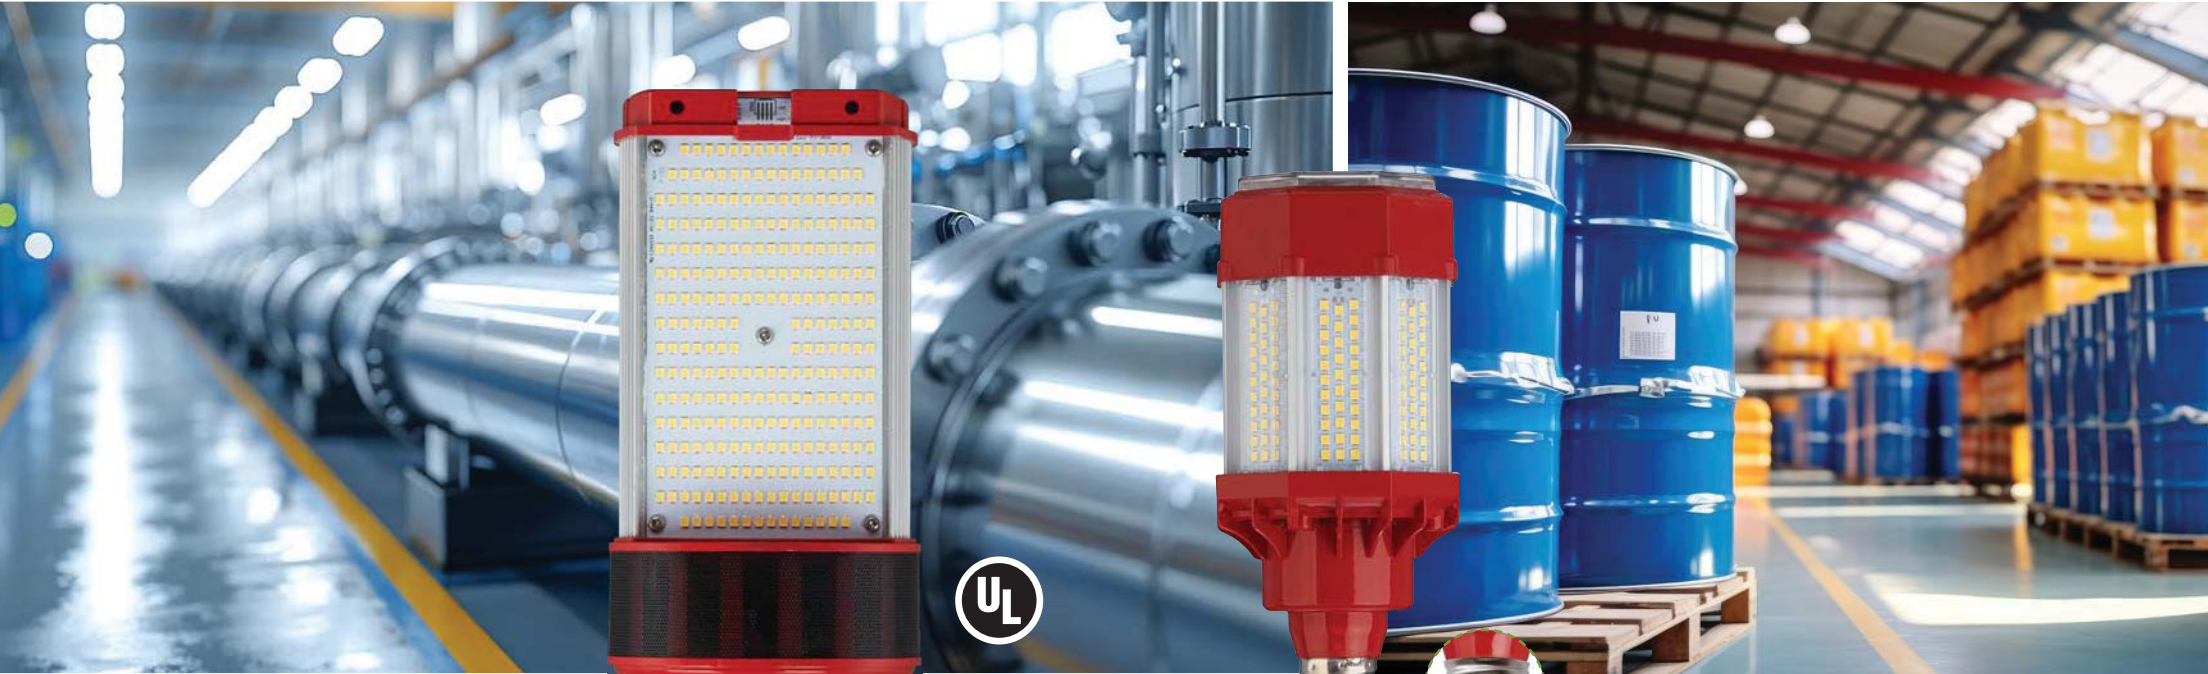

CLASS 1 DIV 2 CERTIFIED

E26 TO E39 ADAPTER

5 YEAR WARRANTY

UL TYPE B
BALLAST BYPASS*

80+
CRI

ACTIVE COOLING

-40°F TO 113°F
8929 / 8924
OPERATING TEMP

-13°F TO 113°F
8990

50,000hrs
L70
RATED LIFE


TYPE A + B



TYPE A



TYPE B

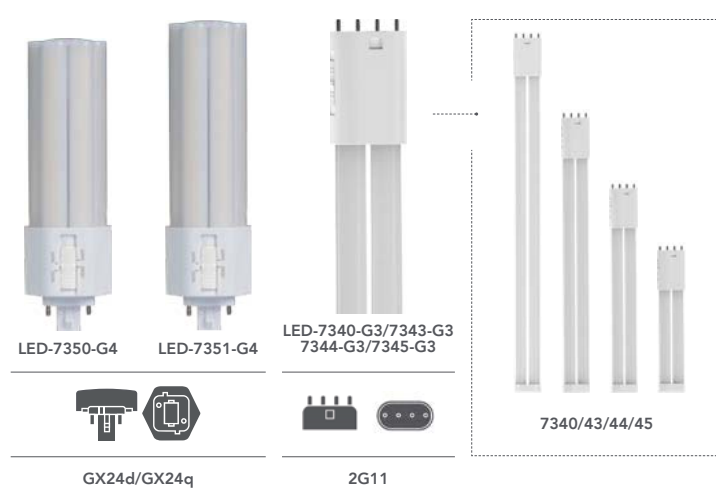

OVER A DOZEN MODELS FOR THE PERFECT SOLUTION. Our latest pin-based LED retrofits now feature FLEXCOLOR allowing for substantial sku reduction and in-field adjustability. Ideal for PL applications, these lamps provide a long-lasting LED replacement for offices, hotels, lobbies, schools, and other commercial spaces.



NOW W/ FLEXCOLOR —

EXTENDABLE END CAP



PART #	VOLTAGE	REPLACES UP TO	WATTAGE	LUMENS	CCT	BASE	MOUNTING	FEATURES	DIMENSIONS	LISTINGS	
PL UNIVERSAL TYPE A+B											
LED-7300-FC-G4	120-277V	13W / 2-PIN CFL	5.5W	720-800	FLEXCOLOR 2700K/3000K/3500K/4000K	GX23			5.0 IN x 1.4 IN		
LED-7310-FC-G5		26W / 2-PIN CFL		800		G24d			5.0 IN x 1.4 IN		
LED-7311-FC1-G4			7W	900-950	FLEXCOLOR 3000K/3500K/4000K	G23-2			5.5 IN x 1.4 IN		
LED-7312-FC1-G4						GX23-2					
LED-7313-FC-G4			9W / 2-PIN CFL	3.5W	389-428	FLEXCOLOR 2700K/3000K/3500K/4000K	G23				5.3 IN x 1.3 IN
LED-7314-FC-G4		13W / 2-PIN CFL	5.5W	628-696	GX23		7.0 IN x 1.4 IN				
LED-7322-FC1-G4		26W / 2-PIN CFL	7W	900-950	FLEXCOLOR 3000K/3500K/4000K	G24d			5.5 IN x 1.4 IN		
LED-7316-FC-G2		32W / 2-PIN CFL	9W	1050-1100	FLEXCOLOR 2700/3000K/3500K/4000K/5000K	G24d			6.8 IN x 2.4 IN (UPRIGHT)		
LED-7318-FC-G2		32W / 4-PIN CFL				G24q GX24q			5.4 IN x 3.1 IN (ROTATED)		
LED-7328-FC-G2		42W / 4-PIN CFL	16W	1750-1850		G24q GX24q			BASE CAN BE EXTENDED BY UP TO 1.0 IN		
LED-7320-FC1-G4		42W / 4-PIN CFL	10W	1320-1460							6.6 IN x 1.4 IN
LED-7320-FC2-G4											
LED-7324-FC1-G4			9W	1230-1360		FLEXCOLOR 3000K/3500K/4000K	G24q GX24q		5.7 IN x 1.3 IN		
LED-7324-FC2-G4						FLEXCOLOR 2700K/4000K/5000K					

PART #	VOLTAGE	REPLACES UP TO	WATTAGE	LUMENS	CCT	BASE	MOUNTING	FEATURES	DIMENSIONS	LISTINGS
PL BALLAST COMPATIBLE TYPE A										
LED-7330-27K-G2	120-277V	26W / 4-PIN CFL	10W	760	2700K	G24q GX24q			6.8 IN x 1.3 IN	 
LED-7330-35K-G2				850	3500K					
LED-7330-40K-G2				916	4000K					
LED-7334-27K-G2		32W / 4-PIN CFL	12W	1100	2700K	G24q GX24q			5.8 IN x 1.4 IN	
LED-7334-35K-G2					3500K					
LED-7334-40K-G2					4000K					
PL + PLL BALLAST BYPASS TYPE B										
LED-7340-FC-G3	120-277V	40W / 4-PIN CFL	17W	2024-2228	FLEXCOLOR 3000K/3500K/4000K/5000K/6500K	2G11			22.0 IN x 1.7 IN	 
LED-7343-FC-G3		36W / 4-PIN CFL	16W	1900-2000					16.0 IN x 1.7 IN	
LED-7344-FC-G3		24W / 4-PIN CFL	10W	1180-1250					12.0 IN x 1.7 IN	
LED-7345-FC-G3		18W / 4-PIN CFL	8.5W	930-980					8.5 IN x 1.7 IN	
LED-7350-FC-G4		32W / 2-PIN CFL	15W	2000-2200	FLEXCOLOR 3000K/3500K/4000K/5000K	GX24q			6.3 IN x 2.0 IN	
LED-7351-FC-G4		42W / 2-PIN CFL	17W	2300-2500					6.7 IN x 2.0 IN	

PART #	WATTAGE	EMG TIME	DIMENSIONS	LISTINGS
EMERGENCY BACK UP KIT				
LED-EMG-05WCP	5W	>90 MIN	9.5 IN x 1.3 IN x 1.5 IN	
LED-EMG-10WCP	10W		12.75 IN x 1.6 IN x 1.5 IN	

PART #	LED-EMG-05WCP	LED-EMG-10WCP
COMPATIBLE PRODUCTS		
LED-7320-XXK-G3	✓	✓
LED-7324-XXK-G3	✓	✓
LED-7340-XXK-G2	✓	✓
LED-7320-FC1-G4	✓	✓
LED-7320-FC2-G4	✓	✓
LED-7316-FC-G2	✓	
LED-7318-FC-G2	✓	✓
LED-7328-FC-G2	✓	✓



TYPE A + B

FLEXCOLOR



LED-10T8/11T8 12T8/15T8 LED-12T5HO 18T5HO/25T5HO



G13 G5 MINI BI-PIN

T8 T5

TYPE B

FLEXCOLOR



LED-8.5T8 LED-42T8 LED-12T5HO 18T5HO/25T5HO



G13 FA8* G5 MINI BI-PIN

T8 T5

EMG OPTIONS



LED-15T8-FC48-EMG | 15W | 90 MIN | FLEXCOLOR 3000K/3500K/4000K/5000K/6500K



LED-EMG-05WCP | 5W | 90 MIN

LED-EMG-10WCP | 10W | 90 MIN


LINEAR T5 + T8



ENERGY SAVING REPLACEMENTS FOR FLUORESCENT T8 AND T5. Every size and installation method you need — in the highest quality, best light output design. Install our retrofits to get worry-free operation for years to come.



8 FT, 2-PIECE DESIGN FOR COST-EFFECTIVE SHIPPING & STORING

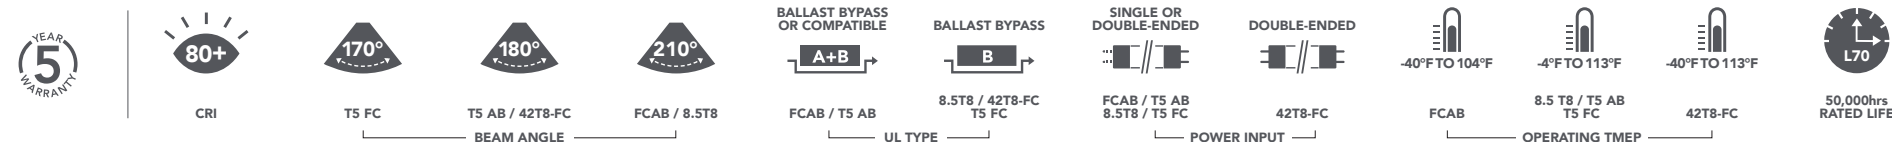

* R17D BASE END CAP AVAILABLE



LINEAR T5 + T8



PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	FEATURES	DIMENSIONS	LISTINGS
T8 BALLAST COMPATIBLE + BALLAST BYPASS TYPE A+B									
LED-10T8-FCAB24-G4	120-277V	17W	10W	1450	FLEXCOLOR 3000K/3500K/ 4000K 5000K/6500K	G13		24.0 IN x 1.0 IN	
LED-11T8-FCAB36-G4		25W	11W	1650				36.0 IN x 1.0 IN	
LED-12T8-FCAB48-G4		32W	12W	1800				48.0 IN x 1.0 IN	
LED-15T8-FCAB48-G4			15W	2200					
T5 BALLAST COMPATIBLE + BALLAST BYPASS TYPE A+B									
LED-12T5HO-835AB24-G5	120-277V	24W	12W	1600	3500K	G5 MINI BI-PIN		23.0 IN x 1.0 IN	
LED-12T5HO-840AB24-G5					4000K				
LED-12T5HO-850AB24-G5					5000K				
LED-18T5HO-835AB36-G5		39W	18W	2500	3500K			34.0 IN x 1.0 IN	
LED-18T5HO-840AB36-G5					4000K				
LED-18T5HO-850AB36-G5					5000K				
LED-25T5HO-835AB48-G5		54W	24W	3500	3500K			46.0 IN x 1.0 IN	
LED-25T5HO-840AB48-G5					4000K				
LED-25T5HO-850AB48-G5					5000K				
LED-25T5HO-850AB48-G5					5000K				
T8 BALLAST BYPASS TYPE B									
LED-8.5T8-835-DS48-G4	120-277V	32W	8.5W	1600	3500K	G13		48.0 IN x 1.0 IN	
LED-8.5T8-840-DS48-G4				1650	4000K				
LED-8.5T8-850-DS48-G4					5000K				
LED-42T8-FC-96-G5		86W	42W	5000	FLEXCOLOR 3000K/3500K/ 4000K 5000K/6500K			FA8*	
T5 BALLAST BYPASS TYPE B									
LED-12T5HO-FCDS24-G4	120-277V	24W	12W	1600	FLEXCOLOR 3000K/3500K 4000K /5000K	G5 MINI BI-PIN		23.0 IN x 1.0 IN	
LED-18T5HO-FCDS36-G4		39W	18W	2370				34.0 IN x 1.0 IN	
LED-25T5HO-FCDS48-G4		54W	25W	3330				46.0 IN x 1.0 IN	

* R17D BASE END CAP AVAILABLE

DEFAULT CCT FOR FLEXCOLOR IS SHOWN IN BOLD

PART #	WATTAGE	LUMENS	EMG LUMENS	CCT	EMG TIME	DIMENSIONS	LISTINGS
T8 LAMP W/ INTEGRATED EMERGENCY BACK UP							
LED-15T8-FC48-EMG	15W	1900-2000	500	FLEXCOLOR 3000K/3500K/ 4000K 5000K/6500K	>90 MIN	47.7 IN x 1.3 IN	 cUL US LISTED
EMERGENCY BACK UP KIT							
LED-EMG-05WCP	5W	N/A	N/A	N/A	>90 MIN	9.5 IN x 1.3 IN x 1.5 IN	 cUL US LISTED
LED-EMG-10WCP	10W					12.75 IN x 1.6 IN x 1.5 IN	

DEFAULT CCT FOR FLEXCOLOR IS SHOWN IN BOLD.

PART #	LED-15T8-FC48-EMG	LED-EMG-05WCP	LED-EMG-10WCP
COMPATIBLE PRODUCTS			
LED-10T8-FCAB24-G4		✓	✓
LED-11T8-FCAB36-G4		✓	✓
LED-12T8-FCAB48-G4	✓	✓	✓
LED-15T8-FCAB48-G4	✓	✓	✓
LED-12T5HO-8XXAB24-G5		✓	✓
LED-18T5HO-8XXAB36-G5		✓	✓
LED-25T5HO-8XXAB48-G5		✓	✓
LED-8.5T8-8XX-DS48-G4	✓	✓	
LED-42T8-FC-96-G5		✓	✓
LED-12T5HO-FCDS24-G4		✓	✓
LED-18T5HO-FCDS36-G4		✓	✓
LED-25T5HO-FCDS48-G4		✓	✓


LED 15T8-EMG IS A LAMP W/ INTEGRATED EMG FUNCTION. IT CAN GENERALLY BE USED IN ANY 4 FT T8 FIXTURE THAT HAS HAD THE BALLAST BYPASSED.



WORK LIGHTS



4 MODELS REPLACING UP TO 400W HID. Super bright and durable, our LED work site lights reduce costs and labor with integrated power cord and daisy-chain feature. Several wattages and connection options to choose from will make lighting any work site easier than ever.

PART #	VOLTAGE	PWR CORD	DAISY-CHAIN	REPLACES	WATTAGE	LUMENS	CCT	FEATURES	DIMENSIONS	LISTINGS
TEMPORARY WORK SITE LIGHTS										
LED-9010-50K-G3	120V	35 FT 18/3 SJTW	UP TO 8 LIGHTS	400W HID	100W	15,000	5000K		6.0 IN x 10.1 IN	
LED-9011-50K-G3		35 FT 14/3 SJTW	UP TO 12 LIGHTS							
LED-9012-50K-G3		35 FT 16/3 SJTW	UP TO 10 LIGHTS							
LED-9016-50K-G3		35 FT 16/3 SJTW	UP TO 6 LIGHTS	600W HID	150W	22,500			6.0 IN x 12.0 IN	
HIGH BAY WORK SITE LIGHTS BALLAST BYPASS TYPE B										
LED-9210-50K-G2	120-277V*	6 FT POWER CORD W/ STRIPPED LEADS	N/A	400W HID	100W	12000	5000K		6.5 IN x 12.7 IN	
TEMPORARY WORK SITE STRING LIGHTS										
LED-9003-50K-10PK-163-G3	120V	100 FT 16/3 SJTW	UP TO 6 STRINGS	900W INC	130W (10 X 13W)	16000/STRING	5000K		4.4 IN x 3.1 IN	
LED-9003-50K-10PK-182-G3		100 FT 18/2 SJTW	UP TO 4 STRINGS							



LED-9010



LED-9003-182

35 FT POWER CORD

CONNECT UP TO 4 STRINGS / 400 FT

5 YEAR WARRANTY

80+ CRI

DAISY-CHAIN **

9003 -40°F TO 113°F
ALL OTHER MODELS -40°F TO 122°F

IP65 RATED
9003

IP64 RATED
ALL OTHER MODELS

50,000hrs RATED LIFE

RemPhos[®]
rem.phos /rem.fäs/ noun

1. INNOVATIVELY ENGINEERED LED FIXTURES
AND RETROFITS MAKING INSTALLATION AS
FAST & EASY AS POSSIBLE

2. CONTROLLABLE & CUSTOMIZABLE LED
FIXTURES AND RETROFITS THAT MAXIMIZE
THE LIGHTING EXPERIENCE FOR END USERS

3. BRAND NAME DERIVED FROM A REMOTE
LAYER OF PHOSPHOR NECESSARY TO CONVERT
BLUE LED LIGHT TO WHITE

 SIMPLE LIGHTING CONTROLS  NETWORKED LIGHTING CONTROLS

 RETROFIT KITS  FIXTURES



SIMPLE LIGHTING CONTROLS

THE EASIEST WAY TO MAKE A LUMINAIRE SMART



NETWORKED LIGHTING CONTROLS


GO BEYOND SMART LIGHTING



YOU HAVE A CHOICE BETWEEN SIMPLICITY OR HIGH-CAPABILITY SYSTEMS...

ADD BASIC CONTROL CAPABILITIES TO SPECIFIC LUMINAIRES...

PRODUCTS	SIMPLE LIGHTING CONTROLS
LBI / LBI-G2 / LBI PALETTE / LBI PALETTE +	IN-LINE MICROWAVE OCCUPANCY AND DAYLIGHT HARVESTING SENSOR
LBI / LBI-G2 / LBI PALETTE / LBI PALETTE + / LBI 65	IN-LINE PASSIVE INFRARED OCCUPANCY AND DAYLIGHT HARVESTING SENSOR
LBI MAX / LIVC / DRUMS / SCONCE / LEDCR / LEDSR / LBE / TYPE C T5 & T8	MICROWAVE OCCUPANCY AND DAYLIGHT HOLD-OFF SENSOR
DRUMS / SCONCE / LEDCR / LEDSR / LBE / TYPE C T5 & T8	LIMITED-RANGE MICROWAVE OCCUPANCY AND DAYLIGHT HOLD-OFF SENSOR
TTV / TTF	PASSIVE INFRARED OCCUPANCY AND DAYLIGHT HARVESTING SENSOR
TRV / TRF / TV / TF	PASSIVE INFRARED OCCUPANCY AND DAYLIGHT HOLD-OFF SENSOR



CONTROLLED BY THE IR23 REMOTE

ADD HIGH VALUE CONTROL CAPABILITIES AT ROOM, BUILDING, OR EVEN CAMPUS LEVELS...

PRODUCTS	NETWORKED LIGHTING CONTROLS
LBI / LBI-G2 / LBI PALETTE / LBI PALETTE +	IN-LINE SILVAIR™ BLUETOOTH MICROWAVE MOTION AND DAYLIGHT HARVESTING SENSOR
LBI / LBI-G2 / LBI PALETTE / LBI PALETTE + / LBI 65	IN-LINE SILVAIR™ BLUETOOTH CONTROL NODE
	IN-LINE SILVAIR™ BLUETOOTH PASSIVE INFRARED MOTION AND DAYLIGHT HARVESTING SENSOR
LBI MAX / LIVC / DRUMS / SCONCE / LEDCR / LEDSR / LBE / TYPE C T5 & T8	SILVAIR™ BLUETOOTH MICROWAVE MOTION AND DAYLIGHT HARVESTING SENSOR
	SILVAIR™ BLUETOOTH NODE W/ EXTERNAL ANTENNA
DRUMS / SCONCE / LEDCR / LEDSR / LBE / TYPE C T5 & T8 / TTV / TTF	SILVAIR™ BLUETOOTH CONTROL NODE
LBE / TYPE C T5 & T8	SILVAIR™ BLUETOOTH PASSIVE INFRARED MOTION AND DAYLIGHT HARVESTING SENSOR
	SILVAIR™ BLUETOOTH PASSIVE INFRARED EXTERNAL ARM SENSOR
TTV / TTF / TRV / TRF / TV / TF	SILVAIR™ PASSIVE INFRARED MOTION AND DAYLIGHT HARVESTING SENSOR



CONNECT AND CONTROL LIGHTING FIXTURES VIA BLUETOOTH MESH W/ THE SILVAIR APP
AVAILABLE FOR IOS AND ANDROID ON THE APP STORE AND GOOGLE PLAY




ONE LIGHT. UNLIMITED POSSIBILITIES — CONNECT UP TO 40 FROM ONE POWER FEED*

EASIEST INSTALL EVER — MORE TIME TO CHILL


LBI

LINKABLE LIGHT BAR W/ AN INTERNAL DRIVER
SWITCH BETWEEN 3 WATTAGES + 3 CCTS

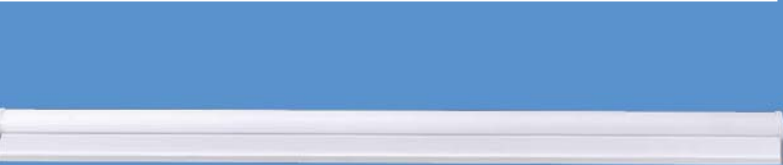


LBI G2

LINKABLE LIGHT BAR W/ AN INTERNAL DRIVER
TUNABLE WHITE. MORE CCTS. MORE LUMENS

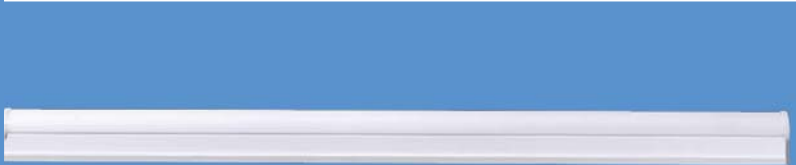


LBI 65

LINKABLE LIGHT BAR W/ AN INTERNAL DRIVER
IP65-RATED. MORE CCTS. MORE LUMENS

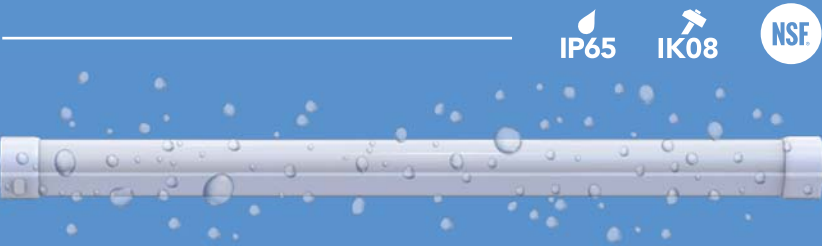

LBI MAX

LINKABLE STRIP FIXTURE W/ AN INTERNAL DRIVER
MORE CCTS. EVEN HIGHER LUMENS

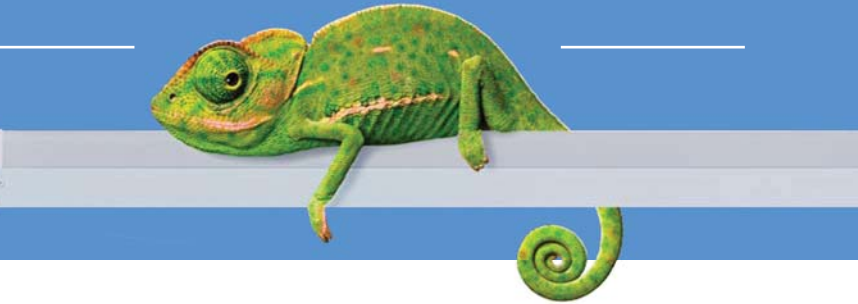

LBI + LBI G2 POPULAR ACCESSORIES


MOUNTING ACCESSORIES



45° BRACKET



UP/DOWN CLIP



TWO-WAY CLIP



SUSPENDED IN-LINE BRACKET KIT

INCOMING POWER



3 FT CABLE KIT




CABLE W/ SWITCH



90° CABLE

CONNECTORS



UP TO 72 IN
LINKING CABLE




DIMMABLE
SEAMLESS CONNECTORS



NON-DIMMABLE
SEAMLESS CONNECTORS

LBI 65 POPULAR ACCESSORIES

AIRCRAFT SUSPENSION CABLE



10 FT / STAINLESS + WATERPROOF

INCOMING POWER



3 FT WIRE WHIP



CONDUIT ADAPTER

CONNECTORS



UP TO 48 IN
LINKING CABLE



DIMMABLE / NON-DIMMABLE
SEAMLESS CONNECTORS

LBI MAX POPULAR ACCESSORIES

MOUNTING ACCESSORIES



PENDANT KIT



SUSPENSION LINKING KIT

PLUS



SIMPLE LIGHTING CONTROLS

|


NETWORKED LIGHTING CONTROLS

SEE PAGE 25 FOR MORE INFORMATION OR CHECK OUT THE PRODUCT SPEC SHEET ON OUR WEBSITE LED-LLC.COM

LINKABLE BAR / INTERNAL DRIVER IP65 (LBI65)



LBI G2 — MORE CCTs. MORE LUMENS PER WATT. CONNECT UP TO 40 FROM ONE POWER FEED*

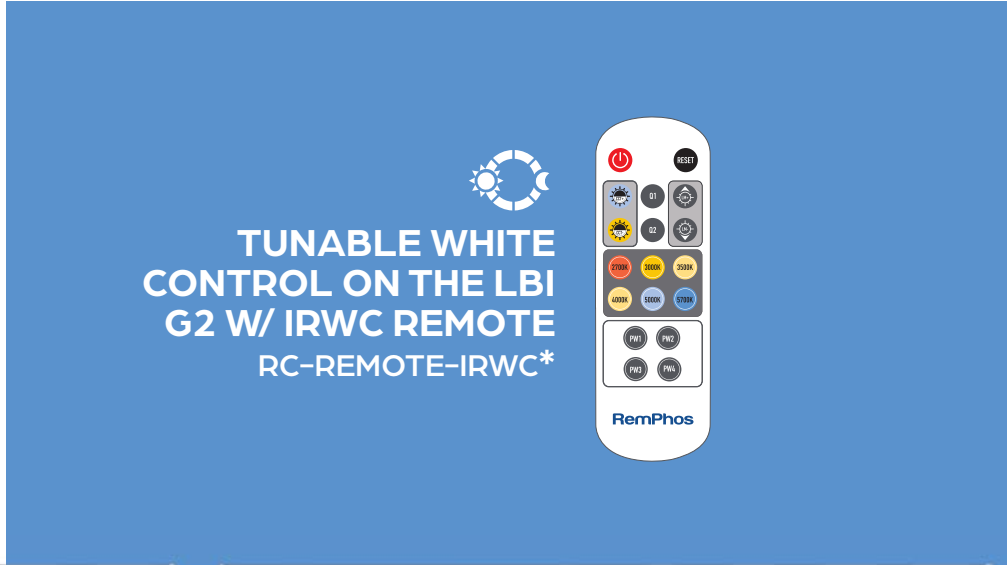

 OPTIONAL REMOTE EMERGENCY BATTERY BACKUP

RP-LBI-EMG2-8W-DIM (EXTERNAL / 8W / DIMMABLE)	RP-LBI-EMG2-25W-DIM (EXTERNAL / 25W / DIMMABLE)	-EMG (INTERNAL / 90 MIN / 500 LM)
** ONLY AVAILABLE FOR G2 MODELS		

 OPTIONAL BUILT-IN EMERGENCY BATTERY BACKUP**

PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
LBI – LINKABLE BAR / INTERNAL DRIVER					
RP-LBI-G1-2F-6W-407K-WC	120-277V	6W/9W/12W	780-1560	3500K/ 4000K /5000K	19.3 IN x 1.2 IN x 1.2 IN
RP-LBI-G1-3F-10W-40K-WC		10W/12W/15W	1400-2100		31.3 IN x 1.2 IN x 1.2 IN
RP-LBI-G1-4F-15W-40K-WC		10W/ 15W /25W	1462-3653		43.3 IN x 1.2 IN x 1.2 IN

FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD

PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
LBI G2 – LINKABLE BAR / INTERNAL DRIVER					
RP-LBI-G2-2F-6W-40K-WC	120-277V	6W/8W/10W/12W	960-1920	2700K/3000K/3500K 4000K /5000K	19.3 IN x 1.2 IN x 1.2 IN
RP-LBI-G2-3F-10W-40K-WC		10W/12W/15W/18W	1600-2400		31.3 IN x 1.2 IN x 1.2 IN
RP-LBI-G2-4F-15W-40K-WC		12W/ 15W /20W/25W	1600-4000		43.3 IN x 1.2 IN x 1.2 IN

FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD

 ADD (-CN) WHEN ORDERING 120-347V MODELS

0-10V
DIM TO OFF
SENSOR READY


12V
AUX OUTPUT


1146
LPW
LBI (LIGHT ENGINE)
EFFICACY


1160
LPW
LBI-G2 (LIGHT ENGINE)
EFFICACY


80+
CRI


WHITE TUNING


120°
BEAM ANGLE


-13°F TO 140°F
OPERATING TEMP


>0.9
PWR FACTOR/THD


>100,000hrs
RATED LIFE**


51,000hrs
RATED LIFE




 **SIMPLE LIGHTING CONTROLS** |  **NETWORKED LIGHTING CONTROLS**

SEE PAGE 25 FOR MORE INFORMATION OR CHECK OUT THE PRODUCT SPEC SHEET ON OUR WEBSITE LED-LLC.COM



PEACE OF MIND, BUILT IN –
WATERPROOF AND SHATTERPROOF
FOR DEMANDING ENVIRONMENTS



WATERPROOF LINKING – CONNECT UP TO 40 FROM ONE POWER FEED*

ORDER A VAPOR TIGHT BUNDLE – ONE SKU SOLUTION

4 FT SLIM VAPOR-TIGHT BUNDLE

RP-LBI65-4FT-25W-40K-WC-VT
4 FT SLIM VAPOR-TIGHT

RP-LBI65-4F-25W-40K-WC-OCC-VT
4 FT SLIM VAPOR-TIGHT W/ PIR SENSOR

RP-LBI65-4FT-25W-40K-WC-OCCBT-VT
4 FT SLIM VAPOR-TIGHT W/ BLUETOOTH PIR SENSOR

8 FT SLIM VAPOR-TIGHT BUNDLE

RP-LBI65-8FT-50W-40K-WC-VT
8 FT SLIM VAPOR-TIGHT

RP-LBI65-8F-50W-40K-WC-OCC-VT
8 FT SLIM VAPOR-TIGHT W/ PIR SENSOR

RP-LBI65-8FT-50W-40K-WC-OCCBT-VT
8 FT SLIM VAPOR-TIGHT W/ BLUETOOTH PIR SENSOR

SEAMLESS CONNECTOR(S) INCOMING POWER CONDUIT ADAPTER INCLUDED W/ EVERY BUNDLE



0-10V
DIM TO OFF
SENSOR READY



12V
AUX OUTPUT



160
LPW
EFFICACY
(LIGHT ENGINE)



WHITE TUNING



80+
CRI



120°
BEAM ANGLE



-22°F TO 122°F
OPERATING TEMP



IK08
IMPACT
RESISTANCE



IP65
INGRESS
PROTECTION



L70
>100,000hrs
RATED LIFE**

* CONNECT UP TO 30 4 FT UNITS TOGETHER @ 120VAC OR 40 4 FT UNITS @ 277VAC ** CALCULATED






 **SIMPLE LIGHTING CONTROLS** |  **NETWORKED LIGHTING CONTROLS**

SEE PAGE 25 FOR MORE INFORMATION OR CHECK OUT THE PRODUCT SPEC SHEET ON OUR WEBSITE LED-LLC.COM

LINKABLE STRIP RETROFIT KIT + FIXTURE (LBI MAX)



HIGHER LUMEN – LINKABLE FIXTURE. CONNECT UP TO 40 FROM ONE POWER FEED*

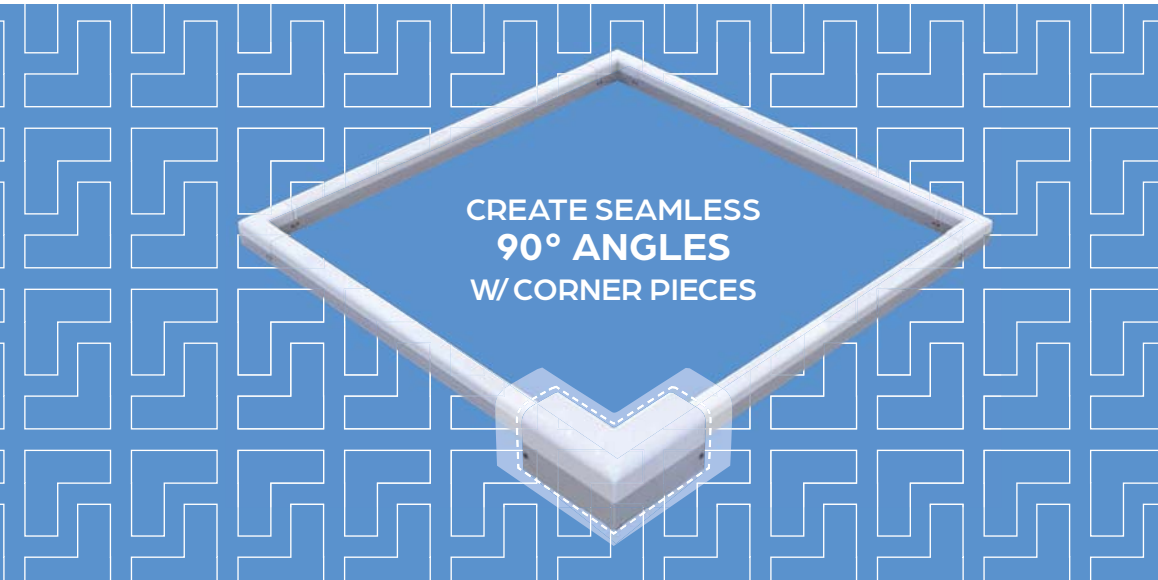

OPTIONAL INTERNAL EMERGENCY BATTERY BACKUP



REMOTE CONTROL

-EM1 / EMERGENCY BATTERY BACKUP (90 MIN / 500 LM)

RC-REMOTE-IR23 (FOR SIMPLE LIGHTING CONTROLS)

PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
LBI MAX – LINKABLE STRIP RETROFIT KIT + FIXTURE					
RP-LBIMAX-2F-25W-40K-WC	120-277V	15W/20W/ 25W /30W	1950-3900	3000K/3500K/ 4000K /5000K	24.0 IN x 2.5 IN x 3.0 IN
RP-LBIMAX-4F-48W-40K-WC		30W/35W/40W/ 48W	3997-6365		4.0 IN x 2.5 IN x 3.0 IN

FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD



PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
LBI MAX – LINKABLE STRIP RETROFIT KIT + FIXTURE (CORNER PIECES)					
RP-LBIMAX-LR-16W-40K-WC (RIGHT-TURN 90° CORNER)	120-277V	7W/10W/13W/ 16W	910-2080	3000K/3500K/ 4000K /5000K	6.0 IN x 2.5 IN x 3.0 IN
RP-LBIMAX-LL-16W-40K-WC (LEFT-TURN 90° CORNER)					

FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD



0-10V
DIM TO OFF
SENSOR READY



12V
AUX OUTPUT



1146
LPW
EFFICACY
(LIGHT ENGINE)



80+
CRI



120°
BEAM ANGLE



-4°F TO 113°F
OPERATING TEMP



L70
>100,000hrs
RATED LIFE**



L90
51,000hrs
RATED LIFE



   SEE SPEC SHEET ON LED-LLC.COM FOR DLC LISTING STATUS

* CONNECT UP TO 20 4 FT UNITS TOGETHER @ 120VAC OR 40 4 FT UNITS @ 277VAC ** CALCULATED

REMPHOS / RETROFIT KITS + FIXTURES

COLOR PALETTE™ x
RemPhos®

LBI PALETTE

LINKABLE LIGHT BAR W/ AN INTERNAL DRIVER
DELIVERING PRECISION WAVELENGTH SELECTION

LBI PALETTE +

LINKABLE LIGHT BAR W/ AN INTERNAL DRIVER
DELIVERING LIMITLESS RGB COLOR MIXING

STAY TUNED...

DMX IS STEPPING UP TO THE LIGHT BAR.
MORE CONTROL. MORE POSSIBILITIES.

COLOR PALETTE x REMPHOS IS A SPECTRAL LIGHTING PRODUCT FAMILY OFFERING PRECISION WAVELENGTH SELECTION
AND LIMITLESS RGB COLOR MIXING THROUGH REMPHOS TECHNOLOGY

TRANSFORMING LIGHT INTO A MEDIUM OF PRECISION AND POSSIBILITY...







 **SIMPLE LIGHTING CONTROLS** |  **NETWORKED LIGHTING CONTROLS**

SEE PAGE 25 FOR MORE INFORMATION OR CHECK OUT THE PRODUCT SPEC SHEET ON OUR WEBSITE LED-LLC.COM

LBI PALETTE / PRECISION WAVELENGTH SELECTION



DESIGNED FOR APPLICATIONS WHERE COLOR ACCURACY MATTERS MOST

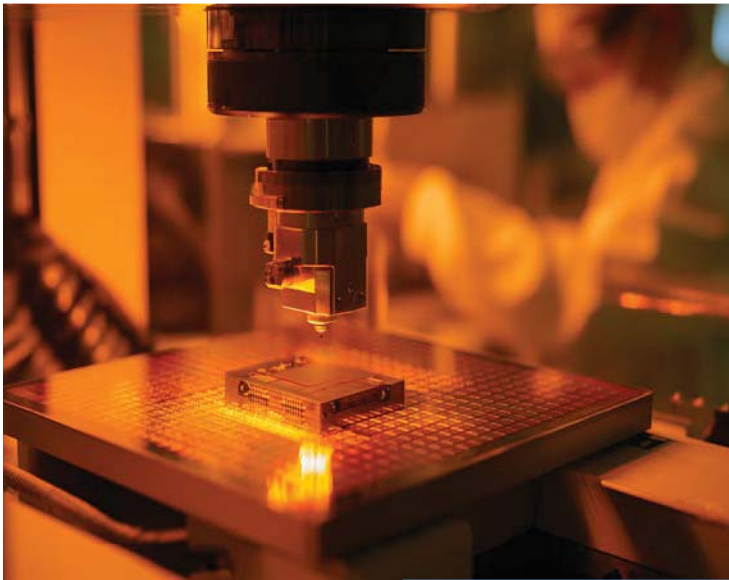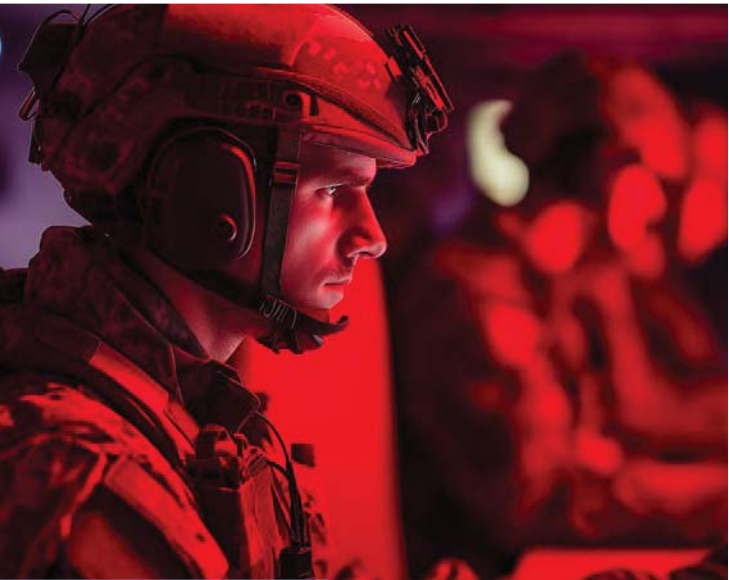

PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
2 FT LBI PALETTE / PRECISION WAVELENGTH SELECTION					
RP-LBI-G2-2F-6W-RED-WC-ORG	120-277V	6W/9W/12W	375-600	RED / ORANGE	19.3 IN x 1.2 IN x 1.2 IN
RP-LBI-G2-2F-6W-AMB-WC-GRN			1175-2125	AMBER / GREEN	
RP-LBI-G2-2F-6W-BLU-WC-VLT			15-300	BLUE / VIOLET	
FACTORY SET WATTAGE SHOWN IN BOLD (EACH BAR CONTAINS 2 COLOR OPTIONS)					
 ADD (-CN) WHEN ORDERING 120-347V MODELS					


PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
4 FT LBI PALETTE / PRECISION WAVELENGTH SELECTION					
RP-LBI-G2-4F-15W-RED-WC-ORG	120-277V	10W/ 15W /25W	750-1200	RED / ORANGE	43.3 IN x 1.2 IN x 1.2 IN
RP-LBI-G2-4F-15W-AMB-WC-GRN			2350-4250	AMBER / GREEN	
RP-LBI-G2-4F-15W-BLU-WC-VLT			30-600	BLUE / VIOLET	
FACTORY SET WATTAGE SHOWN IN BOLD (EACH BAR CONTAINS 2 COLOR OPTIONS)					
 ADD (-CN) WHEN ORDERING 120-347V MODELS					



IP65

NSF

LBI 65 PALETTE IS ALSO OFFERED FOR IP65-RATED AND NSF-CERTIFIED APPLICATIONS



PWR FACTOR/THD



SENSOR READY



BEAM ANGLE



OPERATING TEMP



SEE SPEC SHEET ON LED-LLC.COM FOR DLC LISTING STATUS

REMPHOS / RETROFIT KITS + FIXTURES



LBI PALETTE+ / LIMITLESS RGB COLOR MIXING



 **SIMPLE LIGHTING CONTROLS** |  **NETWORKED LIGHTING CONTROLS**

SEE PAGE 25 FOR MORE INFORMATION OR CHECK OUT THE PRODUCT SPEC SHEET ON OUR WEBSITE LED-LLC.COM

ENDLESS CREATIVITY...FROM SUBTLE ACCENTS TO DRAMATIC EFFECTS



PART #	VOLTAGE	FLEXWATT	LUMENS*	FLEXCOLOR	DIMENSIONS
LBI PALETTE + / LIMITLESS RGB COLOR MIXING					
RP-LBI-G2-2F-12W-RGBWW-WC	120-277V	6W/8W/10W/ 12W	960-1920	RGB COLOR MIXING and 2700K/3000K/3500K 4000K/5000K	19.3 IN x 1.2 IN x 1.2 IN
RP-LBI-G2-3F-18W-RGBWW-WC		10W/12W/15W/ 18W	1600-2880		31.3 IN x 1.2 IN x 1.2 IN
RP-LBI-G2-4F-25W-RGBWW-WC		12W/15W/20W/ 25W	1920-4000		43.3 IN x 1.2 IN x 1.2 IN
				FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD	
 ADD (-CN) WHEN ORDERING 120-347V MODELS					



IP65

NSF


LBI 65 PALETTE IS ALSO OFFERED FOR IP65-RATED AND NSF-CERTIFIED APPLICATIONS




   SEE SPEC SHEET ON LED-LLC.COM FOR DLC LISTING STATUS

* LUMEN VALUES ARE FOR WHITE CCTS ONLY

SELECT COLOR VIA REMOTE OR SWITCH ON BAR

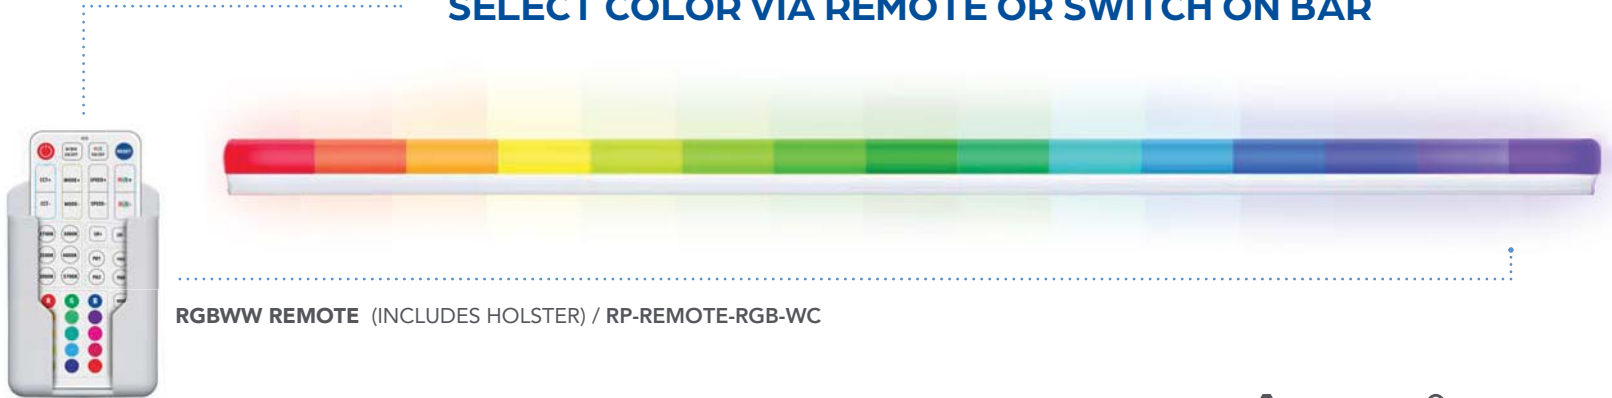

RGBWW REMOTE (INCLUDES HOLSTER) / RP-REMOTE-RGB-WC



PWR FACTOR/THD



SENSOR READY



EFFICACY** (LIGHT ENGINE)



BEAM ANGLE



OPERATING TEMP



>100,000hrs RATED LIFE*



51,000hrs RATED LIFE**

* CALCULATED **APPLIES TO WHITE CCTS ONLY

REMPHOS / RETROFIT KITS + FIXTURES




STAIRWELL / VANITY / WRAPAROUND (LIVC)



SIMPLE LIGHTING CONTROLS | NETWORKED LIGHTING CONTROLS

SEE PAGE 25 FOR MORE INFORMATION OR CHECK OUT THE PRODUCT SPEC SHEET ON OUR WEBSITE LED-LLC.COM

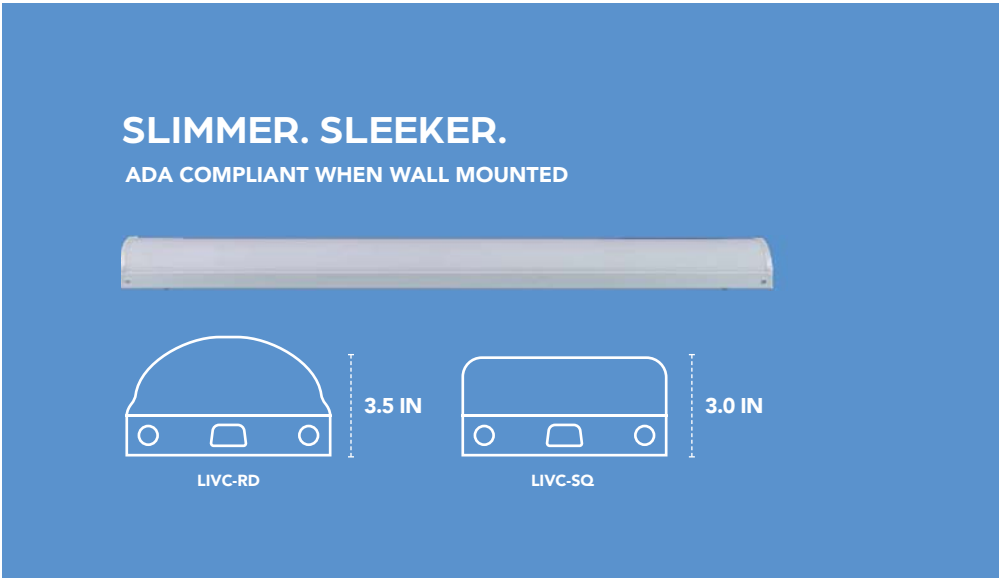

OPTIONAL INTERNAL EMERGENCY BATTERY BACKUP

REMOTE CONTROL

-EMG / EMERGENCY BATTERY BACKUP (90 MIN / 500 LM)

RC-REMOTE-IR23 (FOR MICROWAVE OCC SENSORS)

PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
LIVC – STAIRWELL / VANITY / WRAPAROUND (ROUNDED ENDCAPS)					
RP-LIVC-G3-RD-2FT-15W-40K-WC	120-277V	10W/ 15W /20W/30W	1580-4740	2700K/3000K/3500K/ 4000K /5000K	24.0 IN x 6.0 IN x 3.5 IN
RP-LIVC-G3-RD-3FT-15W-40K-WC					36.0 IN x 6.0 IN x 3.5 IN
RP-LIVC-G3-RD-4FT-15W-40K-WC		10W/ 15W /30W/40W	1580-6320		48.0 IN x 6.0 IN x 3.5 IN
FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD					

USES THE SAME SEAMLESS CONNECTOR AND LINKING CABLE AS OUR LBI

PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
LIVC – STAIRWELL / VANITY / WRAPAROUND (SQUARE ENDCAPS)					
RP-LIVC-G3-SQ-2FT-15W-40K-WC	120-277V	10W/ 15W /20W/30W	1580-4740	2700K/3000K/3500K/ 4000K /5000K	24 IN x 6.0 IN x 3.0 IN
RP-LIVC-G3-SQ-3FT-15W-40K-WC					36 IN x 6.0 IN x 3.0 IN
RP-LIVC-G3-SQ-4FT-15W-40K-WC		10W/ 15W /30W/40W	1580-6320		48 IN x 6.0 IN x 3.0 IN
FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD					



12V
AUX OUTPUT



EFFICACY



CRI



OPERATING TEMP



100,000hrs
RATED LIFE



SEE SPEC SHEET ON LED-LLC.COM FOR DLC LISTING STATUS

* CONNECT UP TO 20 4 FT UNITS TOGETHER @ 120VAC OR 40 4 FT UNITS @ 277VAC

REMPHOS / FIXTURES



WALL + CEILING



SIMPLE LIGHTING CONTROLS | NETWORKED LIGHTING CONTROLS


SEE PAGE 25 FOR MORE INFORMATION OR CHECK OUT THE PRODUCT SPEC SHEET ON OUR WEBSITE LED-LLC.COM



RP-DRD




RP-DOT-BZ
IP65 IK08

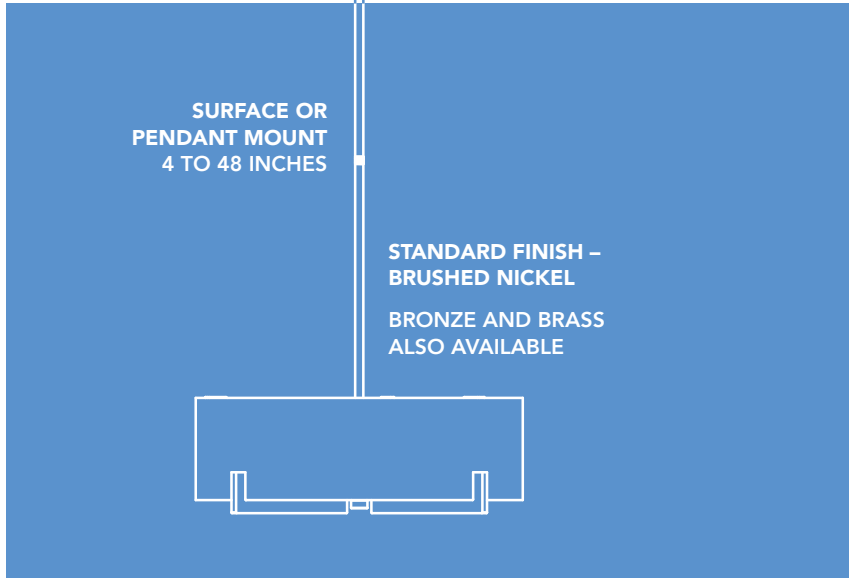

SURFACE OR
PENDANT MOUNT
4 TO 48 INCHES

STANDARD FINISH –
BRUSHED NICKEL
BRONZE AND BRASS
ALSO AVAILABLE

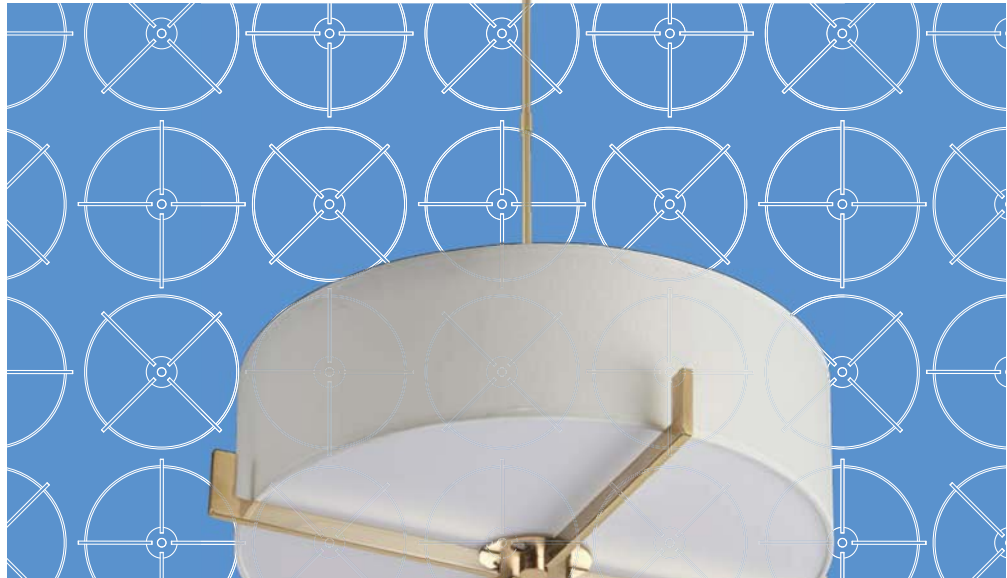

RP-DAL-4S



AN IDEAL CHOICE FOR SOPHISTICATED, REFINED SPACES



OPTIONAL FIELD INSTALLABLE EMERGENCY BACKUP



REMOTE CONTROL

-EM1 / EMERGENCY BATTERY BACKUP (90 MIN / 500 LM)

RC-REMOTE-IR23 (FOR SIMPLE LIGHTING CONTROLS)

PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
DESIGNER DRUM (DRD)					
RP-DRD-14IN-22W-40K-WC-G3	120-277V	6W/10W/16W/22W	750-2750	2700K/3000K/3500K/4000K/5000K	14.5 IN x 3.5 IN
RP-DRD-18IN-22W-40K-WC-G3					18.0 IN x 3.5 IN
OUTDOOR TOUGH DRUM (DOT)					
RP-DOT-14IN-22W-40K-WC-G3	120-277V	6W/10W/16W/22W	750-2750	2700K/3000K/3500K/4000K/5000K	13.8 IN x 4.0 IN
SCONCE (SCD)					
RP-SCD-11IN-15W-40K-WC-G3	120-277V	6W/10W/12W/15W	745 -1860	2700K/3000K/3500K/4000K/5000K	13.0 IN x 3.8 IN

FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD

PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
ARCHITECTURAL LINEN DRUM (DAL)					
RP-DAL-18IN-22W-40K-WC-G3	120-277V	6W/10W/16W/ 22W	750-2750	2700K/3000K/3500K/ 4000K /5000K	15.7 IN x 5.3 IN
RP-DAL-18IN-22W-40K-WC-G3-4S					16.9 IN x 5.6 IN
FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD					
ACCESSORIES					
RP-DAL-4S (OPTIONAL SPOKES)			RP-DAL-PM (LONG + SHORT PENDANT MOUNTING KIT)		



0-10V
DIM TO OFF

SENSOR READY



12V
AUX OUTPUT



1130
LPW

EFFICACY
(LIGHT ENGINE)



120°

DOT / DRD / SCD



160°

DAL



80+

CRI



-4°F TO 140°F

DOT / DRD / SCD



-4°F TO 113°F

DAL



L70

100,000hrs
RATED LIFE

BEAM ANGLE

OPERATING TEMP



SEE SPEC SHEET ON LED-LLC.COM FOR DLC LISTING STATUS

REMPHOS / FIXTURES



SIMPLE LIGHTING CONTROLS | NETWORKED LIGHTING CONTROLS

SEE PAGE 25 FOR MORE INFORMATION OR CHECK OUT THE PRODUCT SPEC SHEET ON OUR WEBSITE LED-LLC.COM

KEEP THE FIXTURE. UPGRADE THE PERFORMANCE



NEXT GENERATION LEDCR —

MORE CCTs. MORE LUMENS PER WATT

OPTIONAL FIELD INSTALLABLE EMERGENCY BACKUP (SHIPS SEPARATELY)					
-EMG / EMERGENCY BATTERY BACKUP (90 MIN / 500 LM)			REMOTE CONTROL		
			RC-REMOTE-IR23 (FOR SIMPLE LIGHTING CONTROLS)		
PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
LEDSR – SCONCE RETROFIT KIT					
RP-LEDSR-G3-4IN-15W-40K-WC	120-277V	6W/10W/12W/ 15W	930-2325	2700K/3000K/3500K/ 4000K /5000K	8.0 IN x 4.0 IN 1.0 IN
FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD					

PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
LEDCR – CIRCULAR RETROFIT KIT					
RP-LEDCR-G3-9IN-22W-40K-WC	120-277V	6W/10W/16W/ 22W	930-3410	2700K/3000K/3500K/ 4000K /5000K	8.7 IN x 1.4 IN
FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD					

- 0-10V
DIM TO OFF
SENSOR READY
- 12V
AUX OUTPUT
- 1160
LPW
EFFICACY
(LIGHT ENGINE)
- 120°
BEAM ANGLE
- 80+
CRI
- 4°F TO 140°F
OPERATING TEMP
- 100,000hrs
RATED LIFE



SIMPLE LIGHTING CONTROLS

|

NETWORKED LIGHTING CONTROLS

SEE PAGE 25 FOR MORE INFORMATION OR CHECK OUT THE PRODUCT SPEC SHEET ON OUR WEBSITE [LED-LLC.COM](https://www.led-llc.com)



TYPE C T5 & T8 KITS + LINEAR BARKITS / EXTERNAL DRIVER (LBE)



TRADITIONAL LOOK OF FLUORESCENT TUBES OR HIGHER EFFICIENCY OF A BARKIT

BUILD YOUR TYPE C KIT																	
RP-T5C-G2-[WATTAGE]-[LENGTH]-[#LAMPS]-[8+COLOR]-[DIMMING]-[HV*]					RP-T8C-G2-[WATTAGE]-[LENGTH]-[#LAMPS]-[8+COLOR]-[DIMMING]-[HV*]												
WATTAGE					LENGTH												
12W (6/8/10/12) 25W (15/18/20/25) 45W (30/35/40/45) 80W (50/60/70/80)					2 FT 3 FT 4 FT												
# OF LAMPS				COLOR				STANDARD DIMMING		OPTIONAL DIMMING							
1L 1 LAMP		2L 2 LAMPS		3L 3 LAMPS		4L 4 LAMPS		30 35 40 50 (3000K) (3500K) (4000K) (5000K)		10V 0-10V DIM		LVD 120-277V TRIAC		1 STEP SINGLE SWITCH		2 STEP DOUBLE SWITCH	
OPTIONAL FIELD INSTALLABLE EMERGENCY BACKUP (SEE SPEC ON LED-LLC.COM FOR ORDERING INFORMATION)																	
* ADD (-HV) WHEN ORDERING 120-347V MODELS																	

BUILD YOUR LBE																	
RP-LBE-G2-[WATTAGE]-[LENGTH]-[#LAMPS]-[8+COLOR]-[DIMMING]-[HV*]																	
WATTAGE					LENGTH												
12W (6/8/10/12) 25W (15/18/20/25) 45W (30/35/40/45) 80W (50/60/70/80)					1 FT 2 FT 3 FT 4 FT 5 FT												
# OF LAMPS				COLOR				STANDARD DIMMING		OPTIONAL DIMMING							
1L 1 LAMP		2L 2 LAMPS		3L 3 LAMPS		4L 4 LAMPS		30 35 40 50 (3000K) (3500K) (4000K) (5000K)		10V 0-10V DIM		LVD 120-277V TRIAC		1 STEP SINGLE SWITCH		2 STEP DOUBLE SWITCH	
OPTIONAL FIELD INSTALLABLE EMERGENCY BACKUP (SEE SPEC ON LED-LLC.COM FOR ORDERING INFORMATION)																	
* ADD (-HV) WHEN ORDERING 120-347V MODELS																	

120-277V

0-10V
DIM TO OFF
SENSOR READY

12V
AUX OUTPUT

1146
LPW
EFFICACY
(LIGHT ENGINE)

120°
BEAM ANGLE

80+
CRI

-4°F TO 122°F
OPERATING TEMP

100,000hrs
L70
RATED LIFE



TAA TYPE C T5 & T8 KITS + LINEAR BARKITS / EXTERNAL DRIVER (LBE)



SIMPLE LIGHTING CONTROLS | NETWORKED LIGHTING CONTROLS

SEE PAGE 25 FOR MORE INFORMATION OR CHECK OUT THE PRODUCT SPEC SHEET ON OUR WEBSITE LED-LLC.COM

TRUSTED FOR FEDERAL PROJECTS

TAA

MEETS THE REQUIREMENTS
OF THE UNITED STATES TRADE
AGREEMENTS ACT (TAA)



BUILD YOUR TAA TYPE C KIT											
RP-T5C-G3-[WATTAGE]-[LENGTH]-[#LAMPS]-[8+COLOR]-[DIMMING]-[CONTROLS]-[EM#]-[TAA] RP-T8C-G3-[WATTAGE]-[LENGTH]-[#LAMPS]-[8+COLOR]-[DIMMING]-[CONTROLS]-[EM#]-[TAA]											
WATTAGE				LENGTH							
12W (6-8-10-12)	25W (15-18-20-25)	45W (30-35-40-45)	80W (50-60-70-80)								
# OF LAMPS				COLOR		STANDARD DIMMING		OPTIONAL DIMMING			
1L 1 LAMP	2L 2 LAMPS	3L 3 LAMPS	4L 4 LAMPS	30 (3000K)	35 (3500K)	40 (4000K)	50 (5000K)	10V 0-10V DIM	LVD 120-277V TRIAC	1 STEP SINGLE SWITCH	2 STEP 2 SWITCH
OPTIONAL FIELD INSTALLABLE EMERGENCY BACKUP (SEE SPEC ON LED-LLC.COM FOR ORDERING INFORMATION)											

BUILD YOUR TAA LBE											
RP-LBE-G3-[WATTAGE]-[LENGTH]-[#LAMPS]-[8+COLOR]-[DIMMING]-[CONTROLS]-[EM#]-[TAA]											
WATTAGE				LENGTH							
12W (6-8-10-12)	25W (15-18-20-25)	45W (30-35-40-45)	80W (50-60-70-80)								
# OF LAMPS				COLOR		STANDARD DIMMING		OPTIONAL DIMMING			
1L 1 LAMP	2L 2 LAMPS	3L 3 LAMPS	4L 4 LAMPS	30 (3000K)	35 (3500K)	40 (4000K)	50 (5000K)	10V 0-10V DIM	LVD 120-277V TRIAC	1 STEP SINGLE SWITCH	2 STEP 2 SWITCH
OPTIONAL FIELD INSTALLABLE EMERGENCY BACKUP (SEE SPEC ON LED-LLC.COM FOR ORDERING INFORMATION)											

120/
347V

0-10V
DIM TO OFF
SENSOR READY

12V
AUX OUTPUT

1146
LPW
EFFICACY
(LIGHT ENGINE)

120°
BEAM ANGLE

80+
CRI

-4°F TO 122°F
OPERATING TEMP

100,000hrs
RATED LIFE




SIMPLE LIGHTING CONTROLS

|

NETWORKED LIGHTING CONTROLS


SEE PAGE 25 FOR MORE INFORMATION OR CHECK OUT THE PRODUCT SPEC SHEET ON OUR WEBSITE LED-LLC.COM

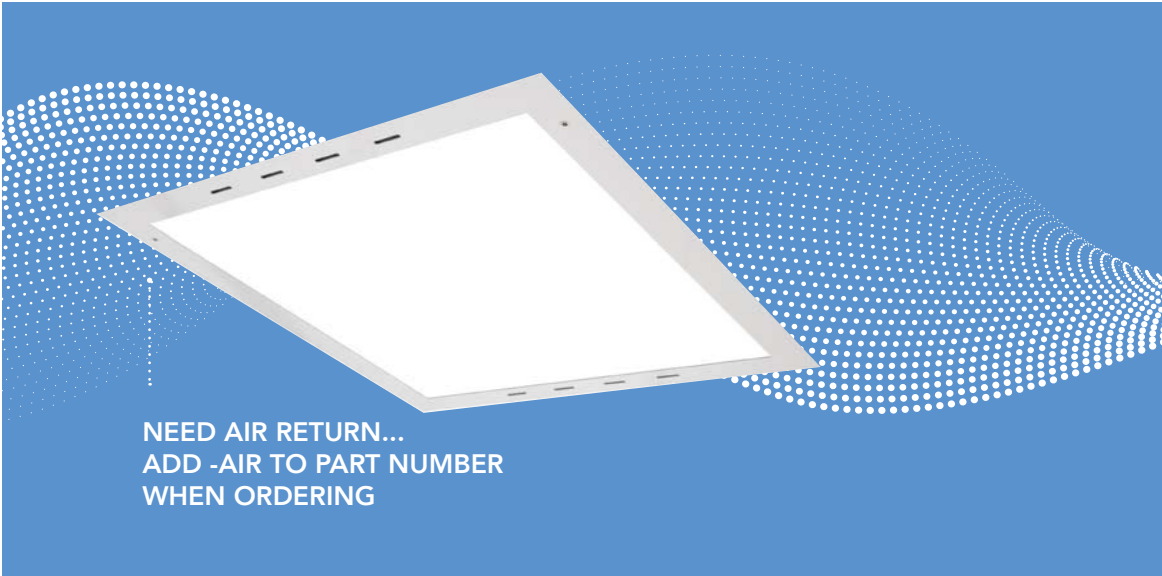

TROFFER RETROFIT KIT + FIXTURE (TTV/TTF)



USE AS A RETROFIT KIT OR A FIXTURE. ONE PIECE DESIGN — 2X FASTER INSTALL

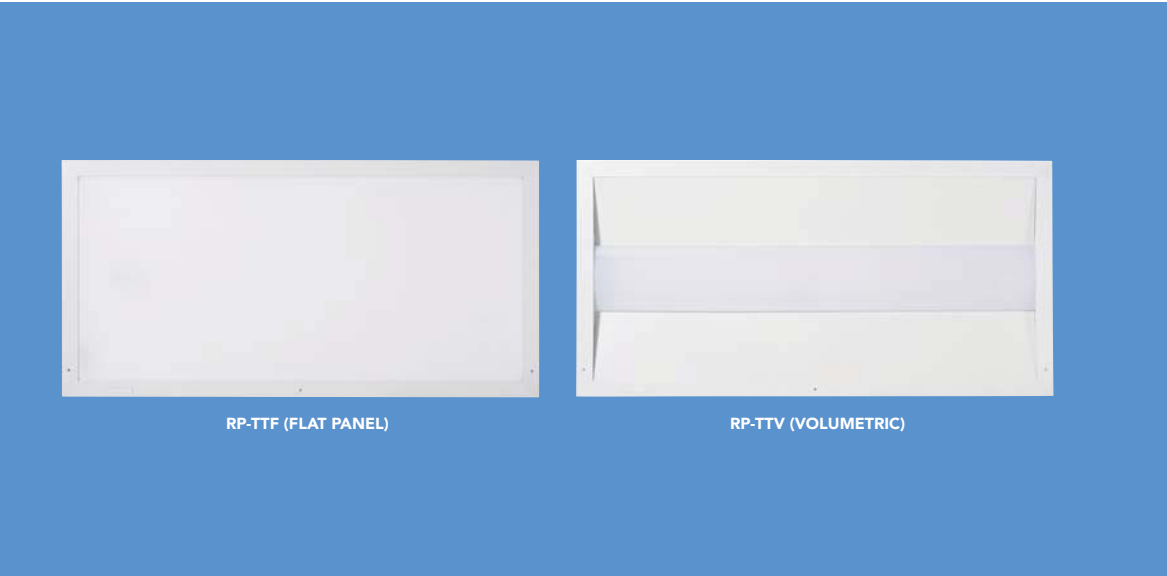

OPTIONAL INTERNAL EMERGENCY BATTERY BACKUP



REMOTE CONTROL

-EMG / EMERGENCY BATTERY BACKUP (90 MIN / 500 LM)

RC-REMOTE-IR23 (FOR SIMPLE LIGHTING CONTROLS)

PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
TROFFER RETROFIT KITS & FIXTURES					
RP-TTV-G1-2X2-20L-840-FWFC-SR	120-277V	16W/20W/24W/28W	2000-3640	3500K/4000K/5000K	23.7 IN x 23.7 IN x 1.6 IN
RP-TTV-G1-1X4-25L-840-FWFC-SR		16W/20W/24W/28W	1968-3556		11.9 IN x 47.8 IN x 1.5 IN
RP-TTV-G1-2X4-33L-840-FWFC-SR		20W/26W/34W/40W	2540-5300		23.7 IN x 47.8 IN x 1.6 IN
RP-TTF-G1-2X2-20L-840-FWFC-SR		16W/20W/24W/28W	2000-3640		23.7 IN x 23.7 IN x 1.7 IN
RP-TTF-G1-1X4-25L-840-FWFC-SR		16W/20W/24W/28W	1968-3556		11.9 IN x 47.8 IN x 1.7 IN
RP-TTF-G1-2X4-33L-840-FWFC-SR		20W/26W/34W/40W	2540-5300		23.7 IN x 47.8 IN x 1.7 IN

FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD

ACCESSORIES

SURFACE MOUNT KIT	FLANGE KIT
RPT-LEDPANEL-SMK-2X2 (2X2)	RPT-LEDPANEL-FMK-2X2-A (2X2)
RPT-LEDPANEL-SMK-1X4* (1X4)	RPT-LEDPANEL-FMK-1X4-A (1X4)
RPT-LEDPANEL-SMK-2X4 (2X4)	RPT-LEDPANEL-FMK-2X4-A (2X4)
* NOT COMPATIBLE W/ 1X4 TTF	



SENSOR READY



12V
AUX OUTPUT



EFFICACY



CRI



BEAM ANGLE



OPERATING TEMP



SURGE
PROTECTION



100,000hrs
RATED LIFE



FC



SEE SPEC SHEET ON LED-LLC.COM FOR DLC LISTING STATUS




TAA TROFFER RETROFIT KITS (TRV/TRF) + FIXTURES (TV/TF)



SIMPLE LIGHTING CONTROLS | NETWORKED LIGHTING CONTROLS

SEE PAGE 25 FOR MORE INFORMATION OR CHECK OUT THE PRODUCT SPEC SHEET ON OUR WEBSITE LED-LLC.COM

SOLUTIONS THAT MEET THE REQUIREMENTS OF THE UNITED STATES TRADE AGREEMENTS ACT

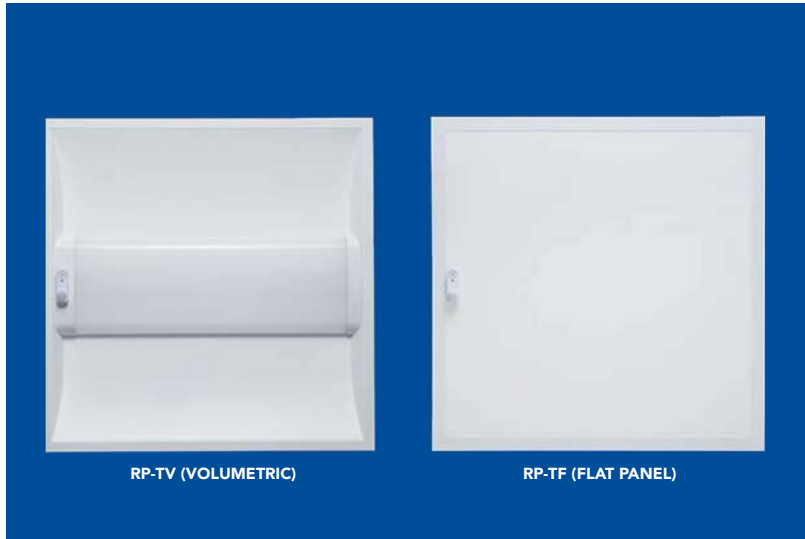

OPTIONAL INTERNAL EMERGENCY BATTERY BACKUP



REMOTE CONTROL

-EMG1 / EMERGENCY BATTERY BACKUP (90 MIN / 500 LM)

RC-REMOTE-IR23 (FOR MICROWAVE OCC SENSORS)

PART #	VOLTAGE	FLEXWATT	LUMENS	FLEXCOLOR	DIMENSIONS
TROFFER FIXTURES					
RP-TV-G1-1X4-35W-40K-WC-TAA	120-277V	20W/30W/ 40W	2200-4400	3500K/ 4000K /5000K	11.9 IN x 47.8 IN x 1.4 IN
RP-TV-G1-2X2-35W-40K-WC-TAA					23.7 IN x 23.7 IN x 1.4 IN
RP-TV-G1-2X4-44W-40K-WC-TAA		26W/35W/ 44W	3300-5500		23.7 IN x 47.8 IN x 1.4 IN
RP-TF-G1-1X4-40W-40K-WC-TAA		20W/30W/ 40W	2600-5200		11.9 IN x 47.8 IN x 1.4 IN
RP-TF-G1-2X2-40W-40K-WC-TAA					23.7 IN x 23.7 IN x 1.4 IN
RP-TF-G1-2X4-50W-40K-WC-TAA		30W/40W/ 50W	3900-6500		23.7 IN x 47.8 IN x 1.4 IN

FACTORY SET WATTAGE, LUMENS AND CCT ARE SHOWN IN BOLD

COMPATIBLE W/ SURFACE MOUNT KIT AND FLANGE KIT (SEE PAGE 45)

PART #	VOLTAGE	FLEXWATT	LUMENS*	FLEXCOLOR	DIMENSIONS
TROFFER RETROFIT KITS					
RP-TRV-G2-1X4-37W-40K-WC-TAA	120-277V	16W/30W/ 37W	2100-5000	3500K/ 4000K /5000K	47.8 IN x 11.9 IN 3.3 IN
RP-TRV-G2-2X2-37W-40K-WC-TAA					47.8 IN x 23.9 IN 3.3 IN
RP-TRV-G2-2X4-41W-40K-WC-TAA		23W/30W/ 41W	3100-5500		23.9 IN x 23.9 IN 3.3 IN
RP-TRF-G2-1X4-40W-40K-WC-TAA		16W/24W/30W/35W/ 40W	2160-5400	2700K/3000K 3500K/ 4000K /5000K	47.0 IN x 11.4 IN 1.3 IN
RP-TRF-G2-2X2-40W-40K-WC-TAA					22.9 IN x 22.9 IN x 1.3 IN
RP-TRF-G2-2X4-50W-40K-WC-TAA			3240-6750		46.9 IN x 22.9 IN x 1.3 IN

FACTORY SET WATTAGE, LUMENS AND CCT ARE SHOWN IN BOLD



SENSOR READY



CONTROL READY PORT



EFFICACY**



CRI



BEAM ANGLE



OPERATING TEMP



SURGE PROTECTION



50,000hrs RATED LIFE



SEE SPEC SHEET ON LED-LLC.COM FOR DLC LISTING STATUS

* CALCULATED ** TROFFER RETROFIT KITS HAVE AN EFFICACY OF 125LPW

REMPHOS / RETROFIT KITS + FIXTURES



SOLAR LIGHTING FOR ANY APPLICATION...

MUNICIPAL & GOVERNMENT

OFF-GRID, ON-BUDGET

SAFER STREETS. SMALLER BUDGETS.
CLEANER COMMUNITIES

NO TRENCHING. NO WIRING

QUICK AND EASY INSTALL FOR URGENT
NEEDS AND UNDERSERVED AREAS

FACILITIES & OPERATIONS

SET IT AND GO

SEASONAL OUTPUT OPTIMIZATION

PROFESSIONAL-GRADE CONSTRUCTION
W/ LOWER MAINTENANCE

REMOTE MONITORING W/ i-SERIES FOR
FEWER SITE VISITS


COMMERCIAL & CORPORATE REAL ESTATE

ON YOUR SCHEDULE

ZERO ENERGY COSTS. MAXIMUM VISIBILITY

ENHANCES SAFETY, WAYFINDING, AND
NIGHTTIME APPEAL

NO UTILITY CONNECTIONS. NO DISRUPTIVE
CONSTRUCTION

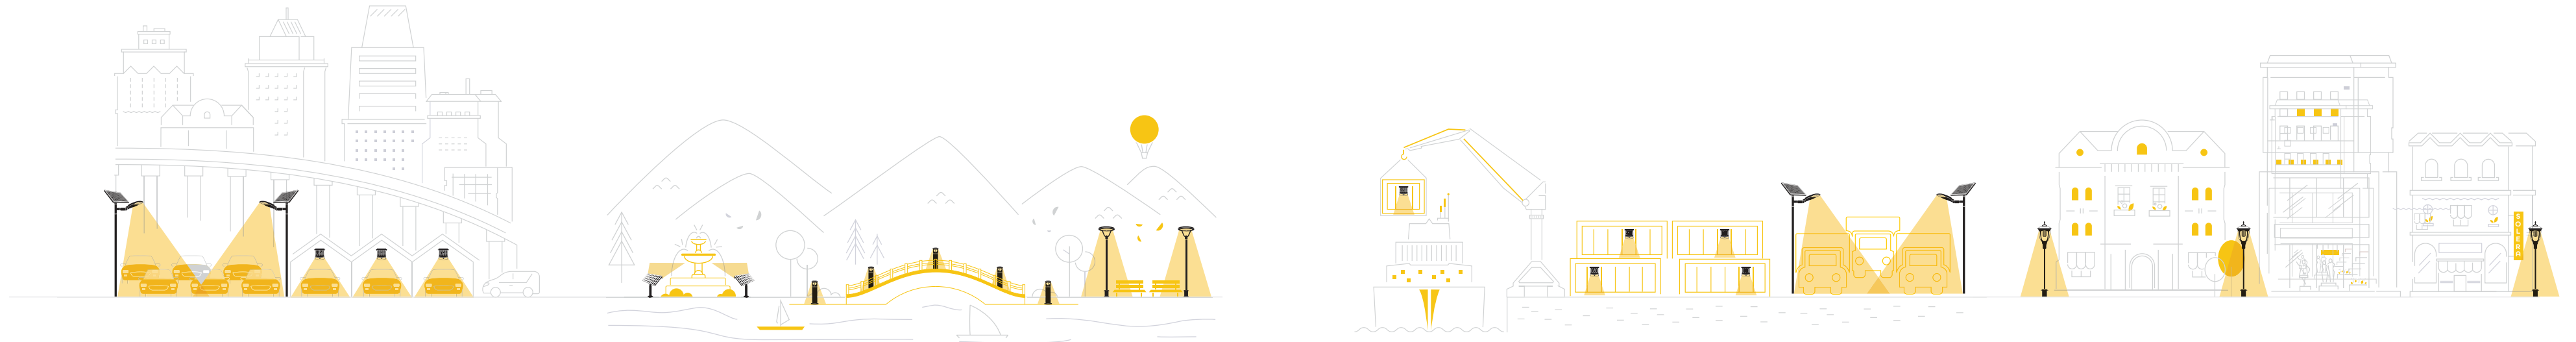



MEET i-SERIES W/ SOLERA CONNECT

SOLERA SOLAR LIGHTING SETS A NEW STANDARD IN SOLAR LIGHTING PERFORMANCE. i-SERIES DELIVERS A YEAR-ROUND, CONFIGURABLE SOLAR-POWERED LIGHTING SYSTEM ENGINEERED TO PROVIDE BRIGHT, RELIABLE ILLUMINATION WHEREVER YOU NEED IT.

MODULAR SOLAR LIGHTING SYSTEM

CONFIGURE THE INTELLIGENT MODULAR SYSTEM TO FIT YOUR APPLICATION



SOLAR PANEL(S)		BATTERY		LIGHT HEAD		
				A1	A2	D1
(2) 55W	(1) 200W	600Wh	1200Wh	STANDARD AREA LIGHT STYLE 1	HIGH-OUTPUT AREA LIGHT STYLE 2	STANDARD DECORATIVE LIGHT STYLE 1

IT'S NOT JUST LIGHTING — IT'S VISIBILITY. CONTROL. DATA.

Designed for intelligent control, each i-Series product integrates seamlessly to Solera CONNECT. Through 4G connectivity and intuitive web and mobile access, remotely program, manage and monitor performance — adjust operating schedules, customize lighting profiles, and respond to alerts across your entire portfolio — anytime, from anywhere.



MONITOR LIGHT HEAD, SOLAR PANEL + BATTERY PERFORMANCE

MANAGE PROJECTS


VIEW REAL-TIME SYSTEM DATA

AND MORE...

i-SERIES MODULAR AREA + DECORATIVE LIGHTS



SL-MA1

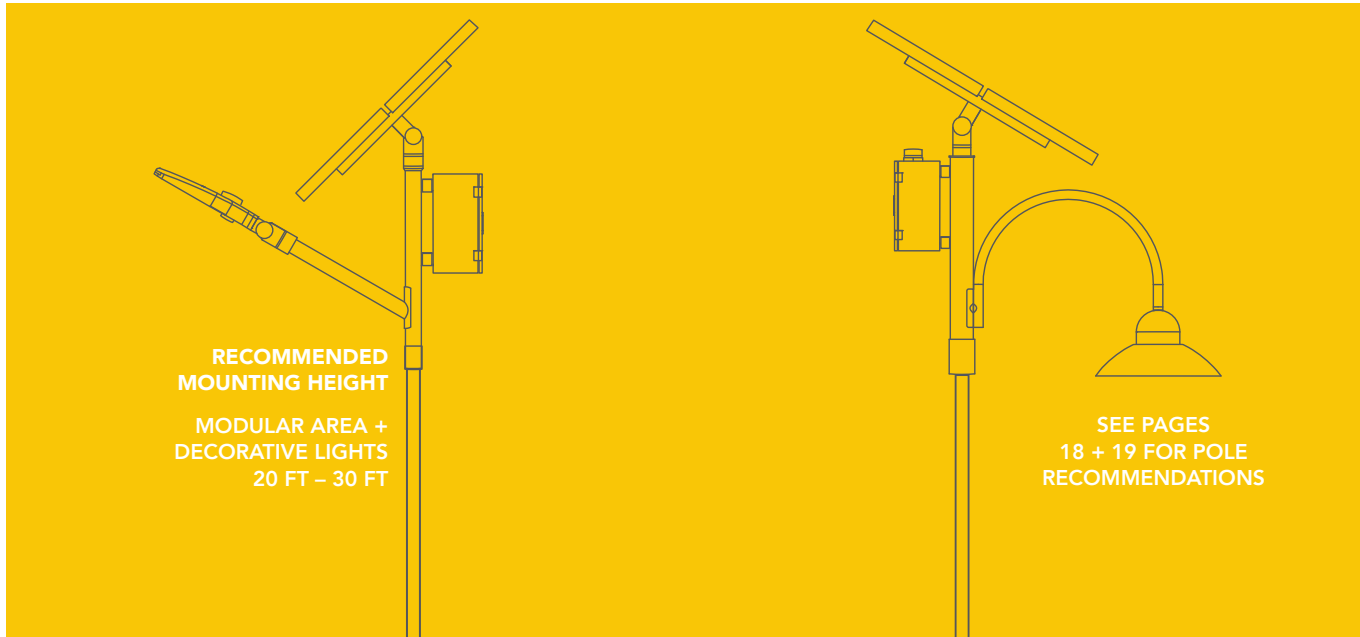

SL-MD1

PART #		LUMENS		FLEXCOLOR		EPA	CONFIGURATION		
MODULAR SOLAR AREA LIGHT									
SL-MA1-OG-10006X4DB1		ADJUSTABLE UP TO 10,000		3000K/4000K/5000K		8.0	LIGHT HEAD STANDARD	SOLAR PANELS (2) 55W	BATTERY 600WH
SL-MA1-HYB-10006X4DB1									
SL-MA2-OG-15012X4DB1		14.0	LIGHT HEAD HIGH OUTPUT			SOLAR PANELS (1) 200W	BATTERY 1200WH		
SL-MA2-HYB-15012X4DB1									
MODULAR SOLAR DECORATIVE LIGHT									
SL-MD1-OG-03006X4-DB1		ADJUSTABLE UP TO 3,000		3000K/4000K/5000K		9.0	LIGHT HEAD STANDARD	SOLAR PANELS (2) 55W	BATTERY 600WH

 HYBRID X = OPTICS | 2 = TYPE 2, 3 = TYPE 3, 4 = TYPE 4, 5 = TYPE 5

- 

STANDARD



OPTIONAL*
- 

YEAR-ROUND LIGHTING
- 

LiFePO4 BATTERY
- 

BATTERY CHARGE TIME
- 

BATTERY LIFE
- 

BATTERY CHARGE TEMP
- 

OPERATING TEMP
- 

REPLACEABLE BATTERY
- 

4G CONNECT SOFTWARE + APP
- 

OPTIONAL MOTION SENSING
- 

100,000hrs RATED LIFE

* 10-YEAR WARRANTY AVAILABLE AT AN ADDITIONAL COST.



ALL-IN-ONE DESIGN W/ SOLAR PANEL, LIGHT ENGINE AND BATTERY BUILT-IN...



SL-AIO-40L



RECOMMENDED
MOUNTING HEIGHT

SL-AIO-40L
12 FT – 18 FT

SL-AIO-70L
14 FT – 25 FT



RECOMMENDED
MOUNTING HEIGHT

SL-SAL-60L
14 FT – 25 FT

SL-SAL-100L
20 FT – 30 FT

SEE PAGES
18 + 19 FOR POLE
RECOMMENDATIONS

A SLEEK DESIGN, EASY INSTALLATION AND GREAT PERFORMANCE...



SL-SAL-100

OFF-GRID AREA LIGHTS							
PART #	COMPARES TO	LUMENS	FLEXCOLOR	EPA	COLOR	DIMENSIONS	LISTINGS
• SL-AIO-40L-FC-SF-GY	20W HID	4000	3000K/4000K/5000K	1.5	GRAY	31.5 IN x 10.6 INx 8.4 IN	CE FCC UL
• SL-AIO-40L-FC-SF-DB					DARK BRONZE		
• SL-AIO-70L-FC-SF-GY	40W HID	7000		2.85	GRAY	39.2 IN x 14.6 INx 10.2 IN	
• SL-AIO-70L-FC-SF-DB					DARK BRONZE		
• SL-AIO-70L-FC2-SF-GY			GRAY				
• SL-AIO-70L-FC2-SF-DB			DARK BRONZE				
OPERATING MODES							
 TIMER  MOTION SENSING							

 TURTLE FRIENDLY ● GRAY ● DARK BRONZE

OFF-GRID AREA LIGHTS							
PART #	COMPARES TO	WATTAGE	LUMENS	FLEXCOLOR	EPA	DIMENSIONS*	LISTINGS
 SL-SAL-60L-FC-T3-BK-G3	250W HID	30W	6000	3000K/4000K/5000K	4.5	36.0 IN x 26.0 IN x 32.0 IN	COMING SOON
 SL-SAL-100L-FC-T3-BK-G3	400W HID	50W	10,000		6.5	40.0 IN x 39.0 IN x 35.0 IN	
OPERATING MODES  TIMER  MOTION SENSING							

* BASED ON POPULAR CONFIGURATION



5 YEAR WARRANTY



7 HRS
RP-SAL
BATTERY CHARGE TIME



6 HRS
SL-SAL
BATTERY CHARGE TIME



UP TO 50 HRS
BATTERY LIFE



32°F TO 149°F
RP-SAL
BATTERY CHARGE TEMP



-4°F TO 140°F
SL-SAL
BATTERY CHARGE TEMP



-4°F TO 122°F
RP-SAL
FIXTURE OPERATING TEMP



-40°F TO 140°F
SL-SAL
FIXTURE OPERATING TEMP



REPLACEABLE BATTERY



TYPE III OPTICS



50,000hrs
RATED LIFE



EXCLUSIVE LONG-LASTING BATTERY

SOLERA SOLAR / OFF-GRID



IMPROVE PEDESTRIAN SAFETY...



THREE UNIQUE MODELS, PERFECT FOR PATHWAYS, PIERS AND MORE...



OFF-GRID BOLLARD LIGHT					
PART #	COMPARES TO	LUMENS	FLEXCOLOR	DIMENSIONS	LISTINGS
• SL-SBL-5L-FC-BK-G2	40W HALOGEN	500	3000K/4000K/5000K/AMBER	10.0 IN x 42.0 IN	CE FCC
• SL-SBL-5L-FC-DB-G2					
OPERATING MODES					
☀ DUSK TO DAWN 🚶 MOTION SENSING					

OFF-GRID			POST TOP LIGHT			
PART #	COMPARES TO	LUMENS	CCT	DIMENSIONS	EPA	LISTINGS
SL-SPT-20W-30K-SF-G2	150W HID	2000	3000K	16.0 IN x 32.0 IN	2.2	CE FCC
SL-SPT-20W-40K-SF-G2			4000K			
OPERATING MODES						
 DUSK TO DAWN  TIMER  MOTION SENSING			SEE PAGES 18 + 19 FOR POLE RECOMMENDATIONS			

OFF-GRID PATHWAY LIGHT						
PART #	COMPARES TO	LUMENS	FLEXCOLOR	DIMENSIONS	EPA	LISTINGS
SL-CPT-30L-FC-BK-G2	150W	3000	3000K/4000K/5000K	18.5 IN x 17.3 IN	1.0	 
SL-CPT-30L-FC-DB-G2						
OPERATING MODES						
 CONSTANT BRIGHTNESS  TIMER  MOTION SENSING			SEE PAGES 18 + 19 FOR POLE RECOMMENDATIONS			

● BLACK ● DARK BRONZE

3 YEAR WARRANTY

6 HRS

7 HRS

7 HRS

SBL

SPT

CPT

BATTERY CHARGE TIME

UP TO 12 HRS

UP TO 30 HRS

UP TO 36 HRS

SBL

SPT

CPT*

BATTERY LIFE

32°F TO 149°F

32°F TO 149°F

-4°F TO 122°F

SBL

SPT

CPT

BATTERY CHARGE TEMP

-4°F TO 140°F

-4°F TO 149°F

-4°F TO 122°F

SBL

SPT

CPT

FIXTURE OPERATING TEMP

REPLACEABLE BATTERY

360°

BEAM ANGLE

50,000hrs RATED LIFE

100,000hrs RATED LIFE

* BASED ON 2HR + SENSOR MODE

SOLERA SOLAR / OFF-GRID



ADJUSTABLE – LIGHT EXACTLY WHERE YOU NEED IT...



OFF-GRID FLOOD LIGHT						
PART #	COMPARES TO	LUMENS	CCT	DIMENSIONS	ADJ HEIGHT	LISTINGS
SL-SFL-20W-40K-BK-G2	150W HID	2000	4000K	26.0 IN x 11.0 IN (PANEL w/ LIGHT)	16 IN TO 21 IN	CE FC
ACCESSORIES			OPERATING MODES			
RP-SFL-MS-G1* (GARDEN STAKE)			☀️ CONSTANT BRIGHTNESS ⌚ TIMER			

* GARDEN STAKE IS AN ACCESSORY AND IS SOLD SEPARATELY



3 YEAR WARRANTY



8 HRS BATTERY CHARGE TIME



UP TO 50 HRS BATTERY LIFE



32°F TO 115°F BATTERY CHARGE TEMP



-4°F TO 140°F OPERATING TEMP



REPLACEABLE BATTERY



120° BEAM ANGLE



50,000hrs RATED LIFE

OFF-GRID MULTIFUNCTIONAL FLOOD LIGHT					
PART #	COMPARES TO	LUMENS	CCT	DIMENSIONS	LISTINGS
SL-SMFL-10W-40K-BK-G1	70W HID	1100	4000K	9.1 IN x 6.5 IN (LIGHT) / 13.6 IN x 9.3 IN (PANEL)	CE FC
OPERATING MODES					
☀️ CONSTANT BRIGHTNESS ⌚ TIMER 🚶 MOTION SENSING					



3 YEAR WARRANTY



8 HRS BATTERY CHARGE TIME



UP TO 24 HRS BATTERY LIFE



32°F TO 140°F BATTERY CHARGE TEMP



-4°F TO 140°F OPERATING TEMP



REPLACEABLE BATTERY



90° BEAM ANGLE



50,000hrs RATED LIFE



...ALL-IN-ONE DESIGN

BUILT TO WITHSTAND COLD CLIMATES...



SURFACE MOUNT BRACKET INCLUDED



OPTIONAL CLAMP MOUNT BRACKET AVAILABLE



ADJUSTABLE AND DETACHABLE PANEL W/ A 6 FT CORD



MAKE IT MAGNETIC

OFF-GRID DISPLAY LIGHT

PART #	COMPARES TO	LUMENS	CCT	DIMENSIONS	LISTINGS
SL-SDL-4FT-40K-BK-G2	150W HID	2000	4000K	47.2 IN x 4.3 IN x 4.3 IN	CE FCC
ACCESSORIES		OPERATING MODES			
RP-SDL-BK-LB (7 IN CLAMP MOUNT BRKT (2 PK))		☀️ CONSTANT BRIGHTNESS ⌚ TIMER			

OFF-GRID FLEXCOLOR WALL PACK

PART #	COMPARES TO	LUMENS	FLEXCOLOR	DIMENSIONS	LISTINGS
SL-SWL-16L-FC-BK-G3	100W HID	1600	3000K/4000K/5000K	13.0 IN X 12.0 IN X 5.0 IN	CE FCC
 SL-SWL-16L-FC-BK-G3-M					
OPERATING MODES					
 CONSTANT BRIGHTNESS  MOTION SENSING					



3 YEAR WARRANTY



8 HRS BATTERY CHARGE TIME



UP TO 24 HRS BATTERY LIFE



32°F TO 113°F BATTERY CHARGE TEMP



-4°F TO 140°F OPERATING TEMP



REPLACEABLE BATTERY



120° BEAM ANGLE



50,000hrs RATED LIFE



3 YEAR WARRANTY



7 HRS BATTERY CHARGE TIME



UP TO 25 HRS BATTERY LIFE



-4°F TO 140°F BATTERY CHARGE TEMP



-40°F TO 140°F OPERATING TEMP



120° BEAM ANGLE



50,000hrs RATED LIFE

☶ MAGNETIC MOUNTING

		MAX EPA											
PART #	MOUNTING HT	(80)	(90)	(100)	(120)	SHAFT DIAMETER	WALL THICKNESS (ga)	ANCHOR BOLT DIA	BOLT CIRCLE	PRODUCT(S)			
ROUND STRAIGHT ANCHOR BASE													
SL-RSP-8-3-11-AB-XX-YY	8 FT	11.2	8.4	6.2	3.7	3.0 IN	11	0.75 IN	8.5 IN	■ ●			
SL-RSP-10-3-11-AB-XX-YY	10 FT	9.0	6.7	5.0	3.0					■ ●			
SL-RSP-12-3-11-AB-XX-YY	12 FT	6.9	5.0	3.9	2.1					■ ● ▲			
SL-RSP-14-3-11-AB-XX-YY	14 FT	5.5	3.9	2.9	1.4					▲ ▲			
SL-RSP-14-4-11-AB-XX-YY		11.7	8.9	7.1	4.0	▲ ✱ ▲							
SL-RSP-16-4-11-AB-XX-YY	16 FT	9.0	6.8	5.3	2.9	4.0 IN				11	0.75 IN	8.5 IN	▲ ▲
SL-RSP-18-4-11-AB-XX-YY	18 FT	7.1	5.2	4.0	2.2								▲ ▲
SL-RSP-20-4-11-AB-XX-YY	20 FT	5.6	4.1	3.1	1.7								▲
SL-RSP-25-5-11-AB-XX-YY	25 FT	6.7	5.0	3.7	2.0								
SL-RSP-25-5-7-AB-XX-YY		12.0	9.2	7.5	4.2	▲ ✱							
SL-RSP-30-5-11-AB-XX-YY	30 FT	4.0	2.8	2.0	N/A	5.0 IN	7	1.00 IN	10.0 IN				
SL-RSP-30-5-7-AB-XX-YY		7.9	6.6	4.8	2.7		11	0.75 IN	8.5 IN				
							7	1.00 IN	10.0 IN				

SQUARE STRAIGHT ANCHOR BASE													
SL-RPSQ-10-4-11-AB-XX-YY	10 FT	25.7	20.8	16.8	11.8	4.0 IN	11	0.75 IN	8.5 IN	■ ●			
SL-RPSQ-12-4-11-AB-XX-YY	12 FT	20.5	16.6	13.4	9.4					■ ● ▲			
SL-RPSQ-14-4-11-AB-XX-YY	14 FT	16.6	13.5	10.9	7.7					▲ ▲			
SL-RPSQ-15-4-11-AB-XX-YY	15 FT	15.1	12.3	9.8	7.0					■ ▲ ▲ ✱			
SL-RPSQ-16-4-11-AB-XX-YY	16 FT	13.6	11.0	8.9	6.3					▲ ▲			
SL-RPSQ-18-4-11-AB-XX-YY	18 FT	11.1	9.0	7.2	5.1					▲ ▲			
SL-RPSQ-20-4-11-AB-XX-YY	20 FT	9.0	7.3	5.9	4.2					5.0 IN	11	1.00 IN	11.0 IN
SL-RPSQ-20-4-7-AB-XX-YY		15.9	12.5	10.1	7.1	7	▲ ✱						
SL-RPSQ-20-5-11-AB-XX-YY		16.0	12.9	10.4	7.4	7	▲ ✱						
SL-RPSQ-20-5-7-AB-XX-YY		26.4	21.3	17.2	12.1	7	1.00 IN	✚ ✚					
SL-RPSQ-25-4-11-AB-XX-YY	25 FT	4.1	3.3	2.6	1.8	4.0 IN	11	0.75 IN	8.5 IN				
SL-RPSQ-25-4-7-AB-XX-YY		9.7	7.8	6.3	4.5		7			▲			
SL-RPSQ-25-5-11-AB-XX-YY		8.5	6.9	5.6	4.0	5.0 IN	11	1.00 IN	11.0 IN	▲			
SL-RPSQ-25-5-7-AB-XX-YY		17.5	14.2	11.4	8.1		7			✱ ✱			
SL-RPSQ-25-6-7-AB-XX-YY		27.5	22.3	18.0	12.6	6.0 IN	11	0.75 IN	11.0 IN	✚ ✚			
SL-RPSQ-30-5-11-AB-XX-YY	30 FT	4.2	3.4	2.7	1.9	5.0 IN				7	1.00 IN	11.5 IN	
SL-RPSQ-30-5-7-AB-XX-YY		10.6	8.6	6.9	4.9								
SL-RPSQ-30-6-7-AB-XX-YY		17.9	14.5	11.7	8.3								6.0 IN

XX = MOUNTING OPTION, T2 = 2 3/8 IN TENON, T2.5 = 2 7/8 IN TENON, T3 = 3 IN TENON

YY = FINISH COLOR, BK = BLACK, DB = DARK BRONZE, GR = GRAY

			MAX EPA						
PART #	MOUNTING HT	TOTAL HT	(80)	(90)	(100)	(120)	SHAFT DIAMETER	WALL THICKNESS (ga)	PRODUCT(S)
ROUND STRAIGHT DIRECT BURIAL									
SL-RSP-8-3-11-EMB-XX-YY	8 FT	11 FT	11.2	8.4	6.2	3.7	3.0 IN	11	■ ●
SL-RSP-10-4-11-EMB-XX-YY	10 FT	13 FT	9.0	6.7	5.0	3.0	4.0 IN		■ ●
SL-RSP-12-4-11-EMB-XX-YY	12 FT	15 FT	6.9	5.0	3.9	2.1			■ ● ▲
SL-RSP-14-4-11-EMB-XX-YY	14 FT	18 FT	11.7	8.9	7.1	4.0			▲ ▲ ✱
SL-RSP-16-4-11-EMB-XX-YY	16 FT	20 FT	9.0	6.8	5.3	2.9			▲
SL-RSP-18-5-11-EMB-XX-YY	18 FT	22 FT	7.1	5.2	4.0	2.2	5.0 IN	▲	
SL-RSP-20-5-7-EMB-XX-YY	20 FT	24 FT	16.4	12.6	10.0	6.6		7	▲ ✱ ✱
SL-RSP-20-5-11-EMB-XX-YY			9.0	7.3	5.9	4.2		11	▲
SL-RSP-25-5-11-EMB-XX-YY	25 FT	30 FT	6.7	5.0	3.7	2.0		7	
SL-RSP-25-5-7-EMB-XX-YY			12.0	9.2	7.5	4.2			▲ ✱
SQUARE STRAIGHT DIRECT BURIAL									
SL-RPSQ-10-4-11-EMB-XX-YY	10 FT	13 FT	25.7	20.8	16.8	11.8	4.0 IN	11	■ ●
SL-RPSQ-12-4-11-EMB-XX-YY	12 FT	15 FT	20.5	16.6	13.4	9.4			■ ● ▲
SL-RPSQ-14-4-11-EMB-XX-YY	14 FT	18 FT	16.6	13.5	10.9	7.7			▲ ▲
SL-RPSQ-15-4-11-EMB-XX-YY	15 FT	19 FT	15.1	12.3	9.8	7.0			■ ▲ ▲ ✱
SL-RPSQ-16-4-11-EMB-XX-YY	16 FT	20 FT	13.6	11.0	8.9	6.3			▲ ▲
SL-RPSQ-18-4-11-EMB-XX-YY	18 FT	22 FT	11.1	9.0	7.2	5.1			▲ ▲
SL-RPSQ-20-4-11-EMB-XX-YY	20 FT	24 FT	9.0	7.3	5.9	4.2			▲
SL-RPSQ-20-4-7-EMB-XX-YY			15.9	12.5	10.1	7.1	7	▲ ✱	
SL-RPSQ-20-5-11-EMB-XX-YY			16.0	12.9	10.4	7.4	11	▲ ✱	
SL-RPSQ-20-5-7-EMB-XX-YY			26.4	21.3	17.2	12.1	7	✚ ✚	
SL-RPSQ-25-5-11-EMB-XX-YY	25 FT	30 FT	8.5	6.9	5.6	4.0	11	▲	
SL-RPSQ-25-5-7-EMB-XX-YY			17.5	14.2	11.4	8.1	7	▲ ✱ ✱	
SL-RPSQ-25-6-7-EMB-XX-YY			27.5	22.3	18.0	12.6		✚ ✚	
SL-RPSQ-30-5-7-EMB-XX-YY			35 FT	10.6	8.6	6.9		4.9	
SL-RPSQ-30-6-7-EMB-XX-YY				17.9	11.7	8.3		8.3	✱ ✚ ✚

XX = MOUNTING OPTION, T2 = 2 3/8 IN TENON, T2.5 = 2 7/8 IN

YY = FINISH COLOR, BK = BLACK, DB = DARK BRONZE, GR = GRAY

- OFF-GRID POST TOP LIGHT (SL-SPT)

● OFF-GRID PATHWAY LIGHT (SL-CPT)
- ▲ OFF-GRID ALL-IN-ONE AREA LIGHT (SL-AIO-40L)

▲ OFF-GRID ALL-IN-ONE AREA LIGHT (SL-AIO-70L)
- ✱ OFF-GRID AREA LIGHT (SL-SAL-60L)

✱ OFF-GRID AREA LIGHT (SL-SAL-100L)
- ✚ INTELLIGENT MODULAR AREA LIGHT (SL-MA1/SL-MA2)

✚ INTELLIGENT MODULAR DECORATIVE LIGHT (SL-MD1)




GONDOLAS + SHIPPERS + DISPLAYS



2 FT GONDOLA
W/ LED CARD
24 IN x 14 IN x 78 IN
LED-9902



3 FT GONDOLA
W/ LED CARD
36 IN x 14 IN x 78 IN
LED-9903

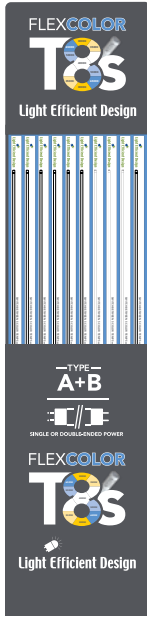

FLEXCOLOR
T8 SHIPPER
17 IN x 13.5 IN x 17 IN
LED-FCT8-M

PRODUCT QTY - 50 LED-XXT8



SCREW-IN RETROFIT
w/ FLEXCOLOR
8 IN x 10 IN x 4 IN
LED-9800



SCREW-IN RETROFIT w/
HORIZONTAL & BASE-DOWN
SOCKET POSITIONS
6 IN x 10 IN x 16 IN
LED-9900



PIN-BASE RETROFITS
9.5 IN x 8 IN x 10 IN
LED-9750-G2



LBI – LINKABLE BAR /
INTERNAL DRIVER
10 IN x 9 IN x 22 IN
RP-LBI-G1-1F-2X-DISPLAY



SOLAR
MULTIFUNCTIONAL
FLOOD LIGHT
9 IN x 9 IN x 16 IN
SL-9101

PRODUCT(S) ORDERED SEPARATELY

PRODUCT(S) ORDERED SEPARATELY

PRODUCT(S) INCLUDED W/ DISPLAY



RemPhos®



CORPORATE HQ & TRAINING CENTER • CARY, IL | INNOVATION & MANUFACTURING CENTER • Middleton, MA
847.380.3540 • led-llc.com • sales@led-llc.com