





Light Efficient Design®

LED LIGHTING SOLUTIONS






 SCREW-IN RETROFITS  PIN-BASE RETROFITS  WORK LIGHTS



PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	FEATURES	DIMENSIONS	LISTINGS	
BOLLARD + POST TOP BALLAST BYPASS TYPE B										
LED-8037E345-A	120-277V	50W	11W	1550/ 1610 /1650	FLEXCOLOR 3000K/ 4000K /5000K	E26		2.6 IN x 5.3 IN	 	
LED-8038E345-A		70W	14W	1850/ 1950 /1990				2.6 IN x 6.3 IN		
LED-8038E345C-A	220-347V		100W	18W				2450/ 2560 /2610		2.6 IN x 7.0 IN
LED-8039E345D-A	120-277V	EX39						2.6 IN x 7.0 IN		
LED-8039E345C-A	220-347V									
LED-8039M345D-A	120-277V									
LED-8039M345C-A	220-347V									
LED-8029E345-A-FW	120-277V	UP TO 150W	FLEXWATT 12W/ 18W /24W	1550-3360	FLEXCOLOR 3000K/ 4000K /5000K	E26		3.0 IN x 6.6 IN	 	
LED-8029E345C-A-FW	220-347V					EX39		3.0 IN x 6.9 IN		
LED-8029M345-A-FW	120-277V							E26		3.4 IN x 7.4 IN
LED-8029M345C-A-FW	220-347V									EX39
LED-8024E345-G7-FW	120-277V	UP TO 320W	FLEXWATT 35W/ 45W /60W	5140-8870		HV⚡		3.8 IN x 9.5 IN		
LED-8024E345C-G7-FW	220-347V			UP TO 400W		11370-15730	HV⚡			
LED-8024M345-G7-FW	120-277V					FLEXWATT 80W/ 100W /110W		15000-21000	4.0 IN x 8.3 IN	
LED-8024M345-G7-FW-HV	277-480V						FLEXWATT 110W/ 135W /150W			
LED-8027M345-G7-FW	120-277V	UP TO 400W	FLEXWATT 80W/ 100W /110W	11370-15730		EX39		HV⚡	3.8 IN x 9.5 IN	
LED-8027M345-G7-FW-HV	277-480V									
LED-8028M345-G7-FW	120-277V	UP TO 400W	FLEXWATT 110W/ 135W /150W	15000-21000		EX39	HV⚡	4.0 IN x 8.3 IN	PENDING	
LED-8075M345-FW	120-277V				UP TO 750W					FLEXWATT 150W/ 200W /270W
LED-8075M345-FW-HV	277-480V									
LED-8000M345-FW-MV	208-347V	UP TO 1000W	FLEXWATT 300W/ 360W /450W	50100-73300	HV⚡					
LED-8000M345-FW-HV	277-480V									

DEFAULT WATTAGE AND CCT FOR SUPERFLEX LAMPS ARE SHOWN IN BOLD

SIZE COMPARISON

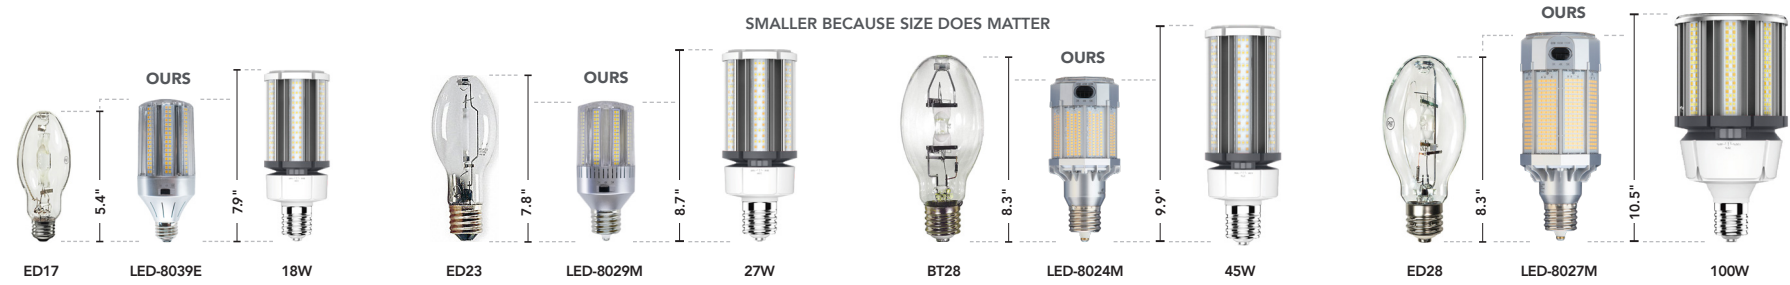

ACTIVE COOLING HV 277-480V INCLUDING 347V MV 208-347V FOR LISTING STATUS GO TO LED-LLC.COM 120-277V ALSO WORKS ON 208V & 240V

BOLLARD + POST TOP



9 MODELS REPLACING UP TO 1000W HID. Keep the look and feel of your existing fixture, while saving energy and maintenance costs. Several models feature FLEXWATT and FLEXCOLOR allowing for substantial sku reduction and in-field adjustability.



LED-8038 →




LED-8000 →

LED-8024 →

LED-8000 – MULTIPLE VOLTAGE OPTIONS

& LONGER NECK FOR A BETTER FIT



* EXCLUDES 8037-39 MODELS

LIGHT EFFICIENT DESIGN / SCREW-IN RETROFITS

BOLLARD + POST TOP



11 MODELS REPLACING UP TO 400W HID. Perfect for post-top and bollard fixtures, these retrofits feature a shape that closely mimics traditional lamp technology. 801X and 802X models feature frosted lenses for a classic lamp-like appearance.



LED-8018 ➔

FROSTED LENS



⬅ LED-8062

AVAILABLE IN 2200K, 4000K & 5000K



120-277V PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	FEATURES	DIMENSIONS	LISTINGS		
BOLLARD + POST TOP BALLAST BYPASS TYPE B											
LED-8017E345-G3	120-277V	100W (150W INC)	20W	2400/ 2700 /2600	FLEXCOLOR 3000K/ 4000K /5000K	E26		2.6 IN x 5.5 IN	 		
LED-8018E345-G3		150W (200W INC)	25W	3000/ 3375 /3250				3.4 IN x 6.8 IN			
LED-8019E345-G3		175W (300W INC)	35W	4200/ 4725 /4550				3.4 IN x 7.1 IN			
LED-8019M345-G3		175W				3.9 IN x 7.9 IN					
LED-8020M345-G3		250W	45W	5400/ 6075 /5850		EX39		3.9 IN x 7.9 IN			
LED-8021M345-G3		320W	65W	7800/ 8775 /8450				4.7 IN x 9.2 IN			
LED-8060E22	120-277V	100W	15W	2250	2200K	E26		2.2 IN x 6.4 IN	 		
LED-8060E40				2700	4000K			2.2 IN x 6.4 IN			
LED-8060E50					5000K						
LED-8061E22		150W	28W	3500	2200K	E26		3.0 IN x 7.6 IN			
LED-8061E40				4000	4000K						
LED-8061E50					5000K						
LED-8062M22		175W	32W	4500	2200K	EX39		3.5 IN x 9.4 IN			
LED-8062M40				5500	4000K						
LED-8062M50					5000K						
LED-8063M22		250W	45W	6000	2200K	EX39		3.5 IN x 9.4 IN			
LED-8063M40				7500	4000K						
LED-8063M50					5000K						
LED-8064M22		320W	54W	8000	2200K	EX39		4.9 IN x 9.4 IN			
LED-8064M40				10000	4000K						
LED-8064M50					5000K						
LED-8065M22		400W	85W	13600	2200K	EX39		4.8 IN x 11.5 IN			
LED-8065M40				15725	4000K						
LED-8065M50					5000K						

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD



PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	FEATURES	DIMENSIONS	LISTINGS				
SHOE BOX + WALL PACK BALLAST BYPASS TYPE B													
LED-8087E345D-G4	120-277V	100W	30W	3500/ 4200 /4300	FLEXCOLOR 3000K/ 4000K /5000K	E26		3.0 IN x 6.4 IN	 				
LED-8087E345CD-G4	220-347V					EX39		3.0 IN x 6.9 IN					
LED-8087M345D-G4	120-277V							3.0 IN x 6.9 IN					
LED-8087M345CD-G4	220-347V							3.0 IN x 6.9 IN					
LED-8088E345D-G4	120-277V	175W	50W	6400/ 6900 /7200		E26				3.8 IN x 7.9 IN			
LED-8088E345CD-G4	220-347V					EX39				3.8 IN x 8.5 IN			
LED-8088M345D-G4	120-277V									3.8 IN x 8.5 IN			
LED-8088M345CD-G4	220-347V									3.8 IN x 8.5 IN			
LED-8089M345D-G4	120-277V	250W	80W	10600/ 10700 /10800		EX39						4.3 IN x 10.0 IN	
LED-8089M345CD-G4	220-347V											4.3 IN x 10.0 IN	
LED-8090M345D-G4	120-277V	400W	110W	14500/ 15400 /15700			HV⚡					4.3 IN x 11.4 IN	
LED-8090M345D-G4-HV	277-480V												

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD



4 MODELS REPLACING UP TO 400W HID. Retrofit almost any shoe box or wall pack fixture to energy & maintenance saving LEDs. Eliminate ballast failures. FLEXCOLOR on several models allows for less stocked inventory as well as field adjustability.



ROTATABLE BASE

DIRECTS LUMENS OUT OF FIXTURE

5 YEAR WARRANTY

ACTIVE COOLING

80+ CRI

ENCLOSED FIXTURES

-40°F TO 122°F OPERATING TEMP

DAMP LOCATION ENVIRONMENT

50,000hrs RATED LIFE



HIGH BAY + LOW BAY




6 MODELS REPLACING UP TO 1000W HID. Ultra-bright LED retrofits for high ceiling environments. Models w/o active cooling for open fixtures & silent operation. Models w/ active cooling are safe to install in enclosed fixtures. Low bay retrofits are ideal for ceiling fixtures that require light to be pushed down and out. Angled LED panels help direct light exactly where it is needed.

PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	FIXTURE	FEATURES	DIMENSIONS	LISTINGS		
HIGH BAY BALLAST BYPASS TYPE B												
LED-8130M40D	120-277V	400W	150W	20900	4000K	EX39			8.7 IN x 10 IN	 		
LED-8130M40CD	220-347V			21200	5000K							
LED-8130M50D	120-277V											
LED-8130M50CD	220-347V											
LED-8236M345D	120-277V	250W	95W	13700/ 14400 /14600	FLEX COLOR 3000K/ 4000K /5000K	EX39			8.7 IN x 9.7 IN	 		
LED-8236M345CD	220-347V			19900/ 20900 /21100					8.7 IN x 10.5 IN			
LED-8232M345D	120-277V	400W	140W								HV 	10.3 IN x 12.5 IN
LED-8232M345D-HV	277-480V											
LED-8242M50D	120-277V	1000W	270W	38700	5000K			HV 				
LED-8242M50D-HV	277-480V											
LOW BAY BALLAST BYPASS TYPE B												
LED-8056E50D-A	120-277V	175W	45W	5560	5000K	E26			5.7 IN x 6.9 IN	 		
LED-8056M50D-A				5560	5000K	EX39			5.7 IN x 7.4 IN			
LED-8035E57-A				60W	7062	5700K			E26			7.9 IN x 6.0 IN

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD

LIGHT DISTRIBUTION / FOOT CANDLE COMPARISON / DLC CEILING-MOUNTED HIGH BAY FIXTURES

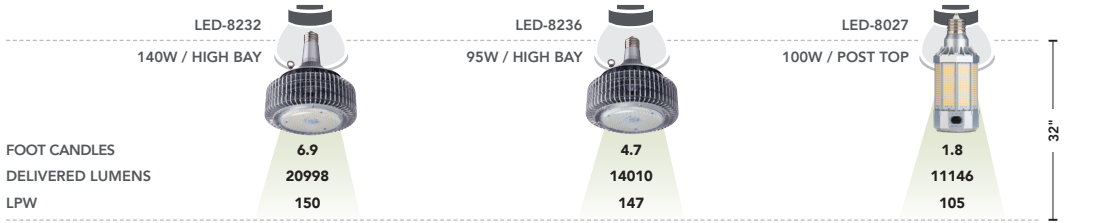

SURGE PROTECTION*



POWERFUL PERFORMANCE – FOR HIGH BAY ENVIRONMENTS





HAZARDOUS LOCATION




3 MODELS REPLACING UP TO 400W HID. Hazardous location fixtures are expensive, retrofitting them w/ UL approved lamps is NOT. Three wattages to choose from. Available in 5000K and 5700K for brighter, safer environments.

PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	FIXTURE	FEATURES	DIMENSIONS	LISTINGS	
HAZARDOUS LOCATION BALLAST BYPASS TYPE B											
LED-8929U57-HAZ	120-277V	150W	24W	3425	5700K	E26*			3.0 IN x 6.6 IN		
LED-8929U57C-HAZ	220-347V								3.4 IN x 7.4 IN		
LED-8924U50-HAZ	120-277V	250W	45W	6620	5000K				4.3 IN x 7.4 IN		
LED-8924U50C-HAZ	220-347V										
LED-8990M50-HAZ	120-277V	400W	110W	14570	5000K	EX39			 HV		4.3 IN x 11.4 IN
LED-8990M50-HV-HAZ	277-480V										

* EDISON TO MOGUL (E26 TO E39) ADAPTER INCLUDED

SURGE ARRESTORS					
PART #	DESCRIPTION	ENCLOSURE	NOMINAL DISCHARGE CURRENT	STRIKE RATING	DIMENSIONS
SPD-277P-10KA-EC-1	10ka SURGE ARRESTOR, 120-277V, PARALLEL	ROUND IP65	10,000A	1@10kA, 2@6.5kA 15@5kA, 110@1.5kA	2.5 IN x 1.4 IN
SPD-347P-10KA	10ka SURGE ARRESTOR, 120-347V, PARALLEL	ROUND IP67			

STEP-DOWN TRANSFORMERS						
PART #	DESCRIPTION	MAX WATTAGE	VOLTAGE	THD	POWER FACTOR	DIMENSIONS
MTM04506224C-LW	450VA STEP-DOWN TRANSFORMER	400W	480/347V IN / 240V OUT	3.4% / 3.8%	0.99	4.1 IN x 2.6 IN x 2.2 IN
MTM01606224C-LW	160VA STEP-DOWN TRANSFORMER	140W		4.3% / 4.1%	0.99	4.3 IN x 1.9 IN x 1.6 IN
MTM00506224C-LW	50VA STEP-DOWN TRANSFORMER	45W		6.2% / 6.7%	0.98 / 0.97	3.0 IN x 1.7 IN x 1.3 IN

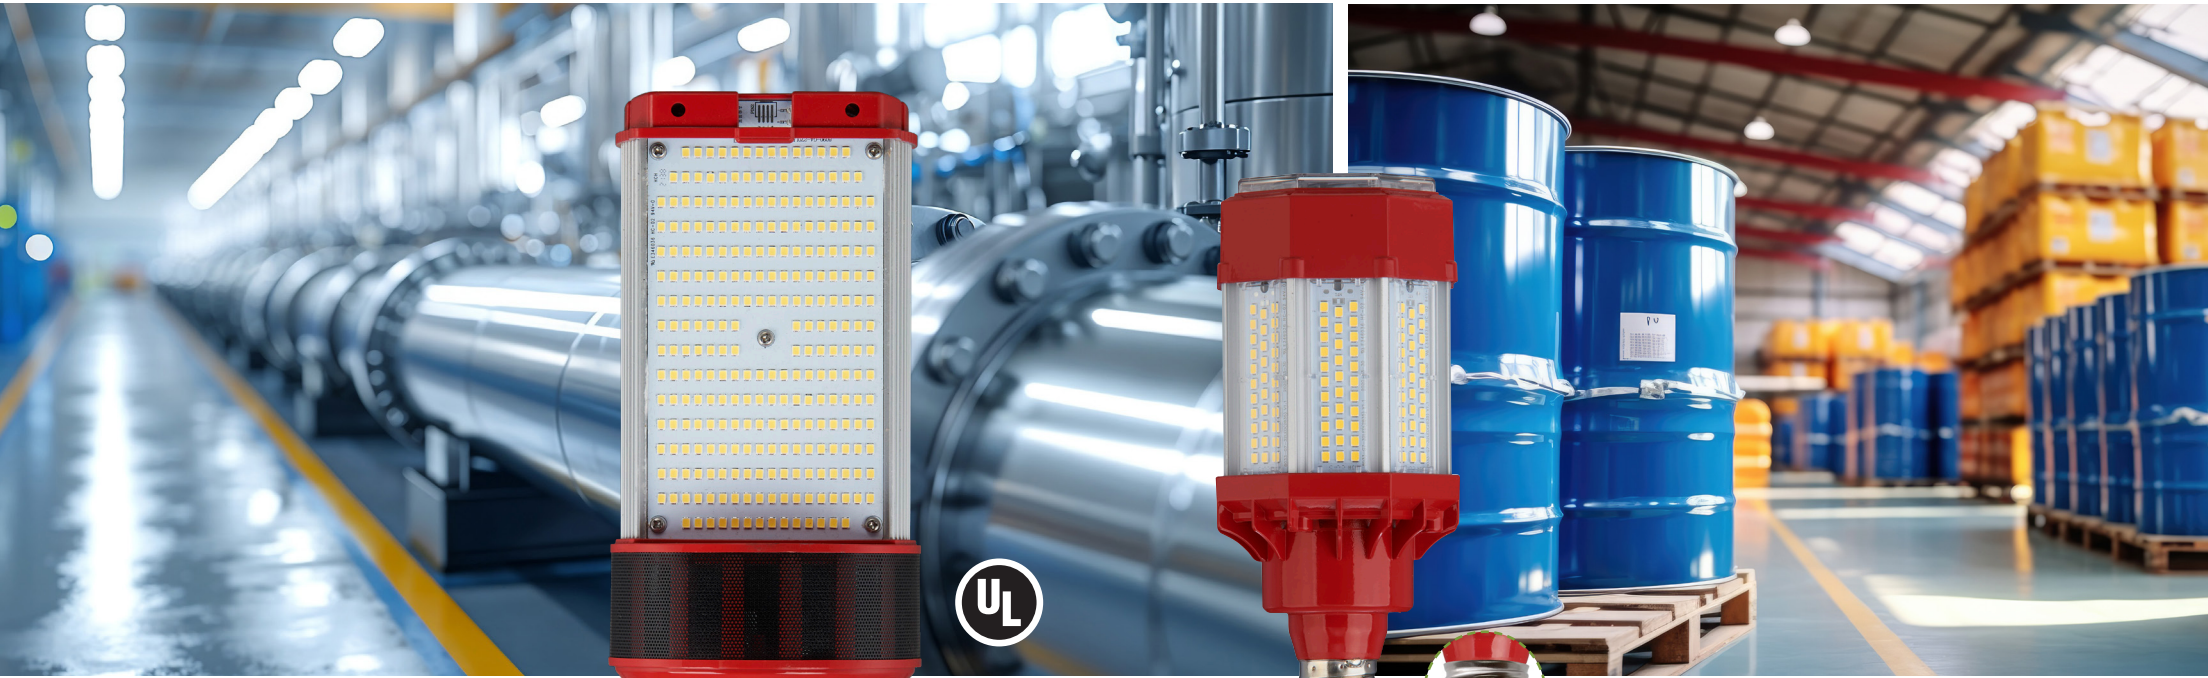

CLASS 1 DIV 2 CERTIFIED

E26 TO E39 ADAPTER

5 YEAR WARRANTY

UL TYPE B BALLAST BYPASS*

80+ CRI

ACTIVE COOLING

-40°F TO 113°F 8929 / 8924

-13°F TO 113°F 8990

50,000hrs RATED LIFE



TYPE A + B

FLEXCOLOR

LED-7300-G4 LED-7310-G5 LED-7311-G4 LED-7312-G4 LED-7313-G4 LED-7314-G4 LED-7322-G4 LED-7316-G2

GX23 G24d G23-2 GX23-2 G23 GX23 G24d G24d

2-PIN

FLEXCOLOR

LED-7318-G2 LED-7328-G2 LED-7320-G4 LED-7324-G4

G24q/GX24q

4-PIN

TYPE A

LED-7330-G2 LED-7334-G2

G24q/GX24q

4-PIN

TYPE B

FLEXCOLOR

LED-7350-G4 LED-7351-G4

GX24d/GX24q

2-PIN

LED-7340-G3/7343-G3
7344-G3/7345-G3

2G11

7340/43/44/45

4-PIN

OVER A DOZEN MODELS FOR THE PERFECT SOLUTION. Our latest pin-based LED retrofits now feature FLEXCOLOR allowing for substantial sku reduction and in-field adjustability. Ideal for PL applications, these lamps provide a long-lasting LED replacement for offices, hotels, lobbies, schools, and other commercial spaces.



NOW W/ FLEXCOLOR —

EXTENDABLE END CAP

5 YEAR WARRANTY

80+ CRI

120° BEAM ANGLE
7311 / 7312 / 7313
7314 / 7322 / 7324 / 7334

140° BEAM ANGLE
7340 / 7343
7344 / 7345

200° BEAM ANGLE
7316 / 7318 / 7328

360° BEAM ANGLE
7300 / 7310 / 7320
7330 / 7350 / 7351

50,000hrs RATED LIFE



PL + PLL



PART #	VOLTAGE	REPLACES UP TO	WATTAGE	LUMENS	CCT	BASE	MOUNTING	FEATURES	DIMENSIONS	LISTINGS
PL UNIVERSAL TYPE A+B										
LED-7300-FC-G4	120-277V	13W / 2-PIN CFL	5.5W	720-800	FLEXCOLOR 2700K/3000K/3500K/4000K	GX23			5.0 IN x 1.4 IN	
LED-7310-FC-G5		26W / 2-PIN CFL		800		G24d			5.0 IN x 1.4 IN	
LED-7311-FC1-G4			7W	900-950	FLEXCOLOR 3000K/3500K/4000K	G23-2			5.5 IN x 1.4 IN	
LED-7312-FC1-G4						GX23-2				
LED-7313-FC-G4			9W / 2-PIN CFL	3.5W	389-428	FLEXCOLOR 2700K/3000K/3500K/4000K	G23			
LED-7314-FC-G4		13W / 2-PIN CFL	5.5W	628-696	GX23		7.0 IN x 1.4 IN			
LED-7322-FC1-G4		26W / 2-PIN CFL	7W	900-950	FLEXCOLOR 3000K/3500K/4000K	G24d			5.5 IN x 1.4 IN	
LED-7316-FC-G2		32W / 2-PIN CFL	9W	1050-1100	FLEXCOLOR 2700/3000K/3500K/4000K/5000K	G24d			6.8 IN x 2.4 IN (UPRIGHT)	
LED-7318-FC-G2		32W / 4-PIN CFL				G24q GX24q			5.4 IN x 3.1 IN (ROTATED)	
LED-7328-FC-G2		42W / 4-PIN CFL	16W	1750-1850		G24q GX24q			BASE CAN BE EXTENDED BY UP TO 1.0 IN	
LED-7320-FC1-G4		42W / 4-PIN CFL	10W	1320-1460	FLEXCOLOR 3000K/3500K/4000K				6.6 IN x 1.4 IN	
LED-7320-FC2-G4										
LED-7324-FC1-G4			9W	1230-1360	FLEXCOLOR 3000K/3500K/4000K		G24q GX24q			
LED-7324-FC2-G4		FLEXCOLOR 2700K/4000K/5000K								

PART #	VOLTAGE	REPLACES UP TO	WATTAGE	LUMENS	CCT	BASE	MOUNTING	FEATURES	DIMENSIONS	LISTINGS
PL BALLAST COMPATIBLE TYPE A										
LED-7330-27K-G2	120-277V	26W / 4-PIN CFL	10W	760	2700K	G24q GX24q			6.8 IN x 1.3 IN	 
LED-7330-35K-G2				850	3500K					
LED-7330-40K-G2				916	4000K					
LED-7334-27K-G2		32W / 4-PIN CFL	12W	1100	2700K	G24q GX24q			5.8 IN x 1.4 IN	
LED-7334-35K-G2					3500K					
LED-7334-40K-G2					4000K					
PL + PLL BALLAST BYPASS TYPE B										
LED-7340-FC-G3	120-277V	40W / 4-PIN CFL	17W	2024-2228	FLEXCOLOR 3000K/3500K/4000K/5000K/6500K	2G11			22.0 IN x 1.7 IN	 
LED-7343-FC-G3		36W / 4-PIN CFL	16W	1900-2000					16.0 IN x 1.7 IN	
LED-7344-FC-G3		24W / 4-PIN CFL	10W	1180-1250					12.0 IN x 1.7 IN	
LED-7345-FC-G3		18W / 4-PIN CFL	8.5W	930-980					8.5 IN x 1.7 IN	
LED-7350-FC-G4		32W / 2-PIN CFL	15W	2000-2200	FLEXCOLOR 3000K/3500K/4000K/5000K	GX24q			6.3 IN x 2.0 IN	
LED-7351-FC-G4		42W / 2-PIN CFL	17W	2300-2500					6.7 IN x 2.0 IN	

PART #	WATTAGE	EMG TIME	DIMENSIONS	LISTINGS
EMERGENCY BACK UP KIT				
LED-EMG-05WCP	5W	>90 MIN	9.5 IN x 1.3 IN x 1.5 IN	
LED-EMG-10WCP	10W		12.75 IN x 1.6 IN x 1.5 IN	

PART #	LED-EMG-05WCP	LED-EMG-10WCP
COMPATIBLE PRODUCTS		
LED-7320-XXK-G3	✓	✓
LED-7324-XXK-G3	✓	✓
LED-7340-XXK-G2	✓	✓
LED-7320-FC1-G4	✓	✓
LED-7320-FC2-G4	✓	✓
LED-7316-FC-G2	✓	
LED-7318-FC-G2	✓	✓
LED-7328-FC-G2	✓	✓



LINEAR T5 + T8



TYPE A + B

FLEXCOLOR



LED-10T8/11T8
12T8/15T8

LED-12T5HO
18T5HO/25T5HO



G13

G5 MINI BI-PIN

T8

T5

TYPE B

FLEXCOLOR



LED-8.5T8

LED-42T8

LED-12T5HO
18T5HO/25T5HO



G13

FA8*

G5 MINI BI-PIN

T8

T5

EMG OPTIONS



LED-15T8-FC48-EMG | 15W | 90 MIN | FLEXCOLOR 3000K/3500K/4000K/5000K/6500K




LED-EMG-05WCP | 5W | 90 MIN

LED-EMG-10WCP | 10W | 90 MIN

ENERGY SAVING REPLACEMENTS FOR FLUORESCENT T8 AND T5. Every size and installation method you need — in the highest quality, best light output design. Install our retrofits to get worry-free operation for years to come.



8 FT, 2-PIECE DESIGN FOR COST-EFFECTIVE SHIPPING & STORING

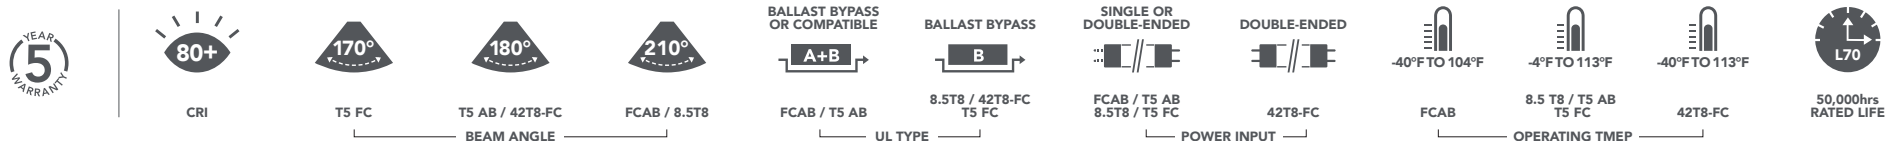

* R17D BASE END CAP AVAILABLE



LINEAR T5 + T8



PART #	VOLTAGE	REPLACES	WATTAGE	LUMENS	CCT	BASE	FEATURES	DIMENSIONS	LISTINGS
T8 BALLAST COMPATIBLE + BALLAST BYPASS TYPE A+B									
LED-10T8-FCAB24-G4	120-277V	17W	10W	1450	FLEXCOLOR 3000K/3500K/ 4000K 5000K/6500K	G13		24.0 IN x 1.0 IN	 
LED-11T8-FCAB36-G4		25W	11W	1650				36.0 IN x 1.0 IN	
LED-12T8-FCAB48-G4		32W	12W	1800				48.0 IN x 1.0 IN	
LED-15T8-FCAB48-G4			15W	2200					
T5 BALLAST COMPATIBLE + BALLAST BYPASS TYPE A+B									
LED-12T5HO-835AB24-G5	120-277V	24W	12W	1600	3500K	G5 MINI BI-PIN		23.0 IN x 1.0 IN	 
LED-12T5HO-840AB24-G5					4000K				
LED-12T5HO-850AB24-G5					5000K				
LED-18T5HO-835AB36-G5		39W	18W	2500	3500K			34.0 IN x 1.0 IN	
LED-18T5HO-840AB36-G5					4000K				
LED-18T5HO-850AB36-G5					5000K				
LED-25T5HO-835AB48-G5		54W	24W	3500	3500K			46.0 IN x 1.0 IN	
LED-25T5HO-840AB48-G5					4000K				
LED-25T5HO-850AB48-G5					5000K				
T8 BALLAST BYPASS TYPE B									
LED-8.5T8-835DS48-G4	120-277V	32W	8.5W	1600	3500K	G13		48.0 IN x 1.0 IN	
LED-8.5T8-840DS48-G4				1650	4000K				
LED-8.5T8-850DS48-G4					5000K				
LED-42T8-FC-96-G5		86W	42W	5000	FLEXCOLOR 3000K/3500K/ 4000K 5000K/6500K	FA8*		93.0 IN x 1.0 IN	
T5 BALLAST BYPASS TYPE B									
LED-12T5HO-FCDS24-G4	120-277V	24W	12W	1600	FLEXCOLOR 3000K/3500K 4000K /5000K	G5 MINI BI-PIN		23.0 IN x 1.0 IN	 
LED-18T5HO-FCDS36-G4		39W	18W	2370				34.0 IN x 1.0 IN	
LED-25T5HO-FCDS48-G4		54W	25W	3330				46.0 IN x 1.0 IN	

* R17D BASE END CAP AVAILABLE

DEFAULT CCT FOR FLEXCOLOR IS SHOWN IN BOLD

PART #	WATTAGE	LUMENS	EMG LUMENS	CCT	EMG TIME	DIMENSIONS	LISTINGS
T8 LAMP W/ INTEGRATED EMERGENCY BACK UP							
LED-15T8-FC48-EMG	15W	1900-2000	500	FLEXCOLOR 3000K/3500K/ 4000K 5000K/6500K	>90 MIN	47.7 IN x 1.3 IN	
EMERGENCY BACK UP KIT							
LED-EMG-05WCP	5W	N/A	N/A	N/A	>90 MIN	9.5 IN x 1.3 IN x 1.5 IN	
LED-EMG-10WCP	10W					12.75 IN x 1.6 IN x 1.5 IN	

DEFAULT CCT FOR FLEXCOLOR IS SHOWN IN BOLD.

PART #	LED-15T8-FC48-EMG	LED-EMG-05WCP	LED-EMG-10WCP
COMPATIBLE PRODUCTS			
LED-10T8-FCAB24-G4		✓	✓
LED-11T8-FCAB36-G4		✓	✓
LED-12T8-FCAB48-G4	✓	✓	✓
LED-15T8-FCAB48-G4	✓	✓	✓
LED-12T5HO-8XXAB24-G5		✓	✓
LED-18T5HO-8XXAB36-G5		✓	✓
LED-25T5HO-8XXAB48-G5		✓	✓
LED-8.5T8-8XX-DS48-G4	✓	✓	
LED-42T8-FC-96-G5		✓	✓
LED-12T5HO-FCDS24-G4		✓	✓
LED-18T5HO-FCDS36-G4		✓	✓
LED-25T5HO-FCDS48-G4		✓	✓


LED 15T8-EMG IS A LAMP W/ INTEGRATED EMG FUNCTION. IT CAN GENERALLY BE USED IN ANY 4 FT T8 FIXTURE THAT HAS HAD THE BALLAST BYPASSED.



WORK LIGHTS



4 MODELS REPLACING UP TO 400W HID. Super bright and durable, our LED work site lights reduce costs and labor with integrated power cord and daisy-chain feature. Several wattages and connection options to choose from will make lighting any work site easier than ever.

PART #	VOLTAGE	PWR CORD	DAISY-CHAIN	REPLACES	WATTAGE	LUMENS	CCT	FEATURES	DIMENSIONS	LISTINGS
TEMPORARY WORK SITE LIGHTS										
LED-9010-50K-G3	120V	35 FT 18/3 SJTW	UP TO 8 LIGHTS	400W HID	100W	15,000	5000K		6.0 IN x 10.1 IN	
LED-9011-50K-G3		35 FT 14/3 SJTW	UP TO 12 LIGHTS							
LED-9012-50K-G3		35 FT 16/3 SJTW	UP TO 10 LIGHTS							
LED-9016-50K-G3		35 FT 16/3 SJTW	UP TO 6 LIGHTS	600W HID	150W	22,500			6.0 IN x 12.0 IN	
HIGH BAY WORK SITE LIGHTS BALLAST BYPASS TYPE B										
LED-9210-50K-G2	120-277V*	6 FT POWER CORD W/ STRIPPED LEADS	N/A	400W HID	100W	12000	5000K		6.5 IN x 12.7 IN	
TEMPORARY WORK SITE STRING LIGHTS										
LED-9003-50K-10PK-163-G3	120V	100 FT 16/3 SJTW	UP TO 6 STRINGS	900W INC	130W (10 X 13W)	16000/STRING	5000K		4.4 IN x 3.1 IN	
LED-9003-50K-10PK-182-G3		100 FT 18/2 SJTW	UP TO 4 STRINGS							



← LED-9010



↑ LED-9003-182

35 FT POWER CORD

CONNECT UP TO 4 STRINGS / 400 FT

5 YEAR WARRANTY

80+ CRI

DAISY-CHAIN **

9003 -40°F TO 113°F
ALL OTHER MODELS -40°F TO 122°F

IP65 RATED
9003
INGRESS PROTECTION

IP64 RATED
ALL OTHER MODELS

50,000hrs RATED LIFE



CORPORATE HQ & TRAINING CENTER • CARY, IL | INNOVATION & MANUFACTURING CENTER • Middleton, MA
847.380.3540 • led-llc.com • sales@led-llc.com