



 **Light Efficient Design**  **LEADING THRU INNOVATION**

120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS	
SHOE BOX + WALL PACK BALLAST BYPASS TYPE B									
LED-8086E30-G4		70W	20W	2800	3000K	E26	2.6" x 5.2"		
LED-8086E40-G4				2800	4000K				
LED-8086E50-G4				2880	5000K				
LED-8087E345D-G4	LED-8087E345CD-G4	100W	30W	3500/ 4200 /4300	FLEXCOLOR 3000K/ 4000K /5000K	E26	3.0" x 6.4"		
LED-8087M345D-G4	LED-8087M345CD-G4					EX39	3.0" x 6.9"	 	
LED-8088E345D-G4	LED-8088E345CD-G4	175W	50W	6400/ 6900 /7200		E26	3.8" x 7.9"		
LED-8088M345D-G4	LED-8088M345CD-G4					EX39	3.8" x 8.5"	 	
LED-8089M345D-G4	LED-8089M345CD-G4	250W	80W	10600/ 10700 /10800			4.3" x 10.0"		
LED-8090M345D-G4		400W	110W	14500/ 15400 /15700			4.3" x 11.4"		
 LED-8090M345D-G4-HV	LED-8090M345D-G4-HV								
LED-8089M30D-G5		250W	80W	10670		3000K	EX39	4.3" x 8.3"	 
LED-8089M40D-G5				10760	4000K				
LED-8089M50D-G5				10850	5000K				
LED-8091M40D		1000W	320W	43380	4000K	EX39	9.0" x 12.7" (PANEL)	 	
LED-8091M50D				44610	5000K				
 LED-8091M40D-HV	LED-8091M40D-HV	1000W	320W	43380	4000K		4.7" x 11.2" (DRIVER)		
 LED-8091M50D-HV	LED-8091M50D-HV			44610	5000K				

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD.



SHOE BOX + WALL PACK



7 MODELS REPLACING UP TO 1000W HID. Retrofit almost any shoe box or wall pack fixture to energy & maintenance saving LED technology. Eliminates ballast failures. FlexCOLOR on several models allows for less stocked inventory as well as field adjustability. Larger models include support feet to prevent socket sag.



LED PANEL ADHERES TO FIXTURE LENS

ROTATABLE BASE — DIRECTS LUMENS OUT OF FIXTURE

 5 YEAR WARRANTY

 120-277V
*

 ACTIVE COOLING

 80+ CRI

 ENCLOSED FIXTURES

 -40°F TO 122°F
OPERATING TEMP

 DAMP LOCATION
ENVIRONMENT


 50,000hrs
RATED LIFE

120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
BOLLARD + POST TOP BALLAST BYPASS TYPE B								
LED-8029E345-A-FW	LED-8029E345C-A-FW	70W/100W/150W	FLEXWATT 12W/18W/24W	1550-3360	FLEXCOLOR 3000K/4000K/5000K	E26	3.0" x 6.6"	
LED-8029M345-A-FW	LED-8029M345C-A-FW					EX39	3.0" x 6.9"	
LED-8024E345-G7-FW	LED-8024E345C-G7-FW	175W/250W/320W	FLEXWATT 35W/45W/60W	5140-8870		E26	3.4" x 7.4"	
LED-8024M345-G7-FW	LED-8024M345C-G7-FW					EX39	3.4" x 7.8"	
LED-8027M345-G7-FW		320W/400W	FLEXWATT 80W/100W/110W	11370-15730		EX39	3.8" x 9.5"	
LED-8027M345-G7-FW-HV	LED-8027M345-G7-FW-HV							
LED-8037E345-A	LED-8037E345C-A	50W	11W	1550/1610/1650	FLEXCOLOR 3000K/4000K/5000K	E26	2.6" x 5.3"	
LED-8038E345-A	LED-8038E345C-A	70W	14W	1850/1950/1990		E26	2.6" x 5.3"	
LED-8039E345D-A	LED-8039E345C-A	100W	18W	2450/2560/2610		E26	2.6" x 6.3"	
LED-8039M345D-A	LED-8039M345C-A					EX39	2.6" x 7.0"	
LED-8033E30D-G7		175W	35W	5140	3000K	E26	3.4" x 7.2"	
LED-8033E40D-G7				5290	4000K			
LED-8033E50D-G7				5360	5000K			
LED-8033M30D-G7				5140	3000K	EX39	3.4" x 7.8"	
LED-8033M40D-G7				5290	4000K			
LED-8033M50D-G7				5360	5000K			

DEFAULT WATTAGE AND CCT FOR SUPERFLEX LAMPS ARE SHOWN IN BOLD.

SIZE COMPARISON

SMALLER BECAUSE SIZE DOES MATTER

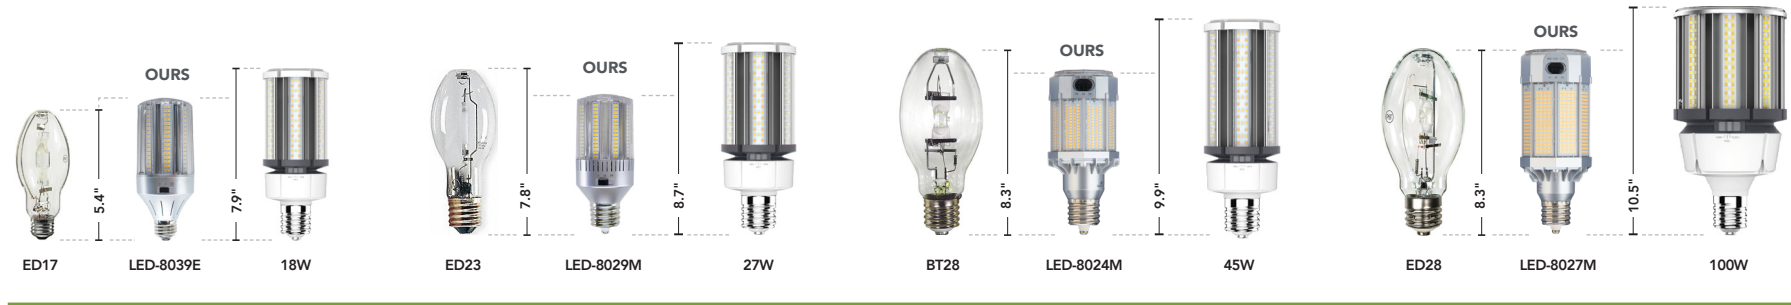

BOLLARD + POST TOP



7 MODELS REPLACING UP TO 400W HID. Keep the look and feel of your HID post top and bollard fixtures, while saving energy and maintenance costs. Several models feature FlexWATT and FlexCOLOR allowing for substantial sku reduction and in-field adjustability. Our retrofits are small in size so they fit in almost any fixture.



LED-8038 ⬆

LED-8024 ➡

THE FLEXIBILITY OF 9 LAMPS IN 1 W/ SUPERFLEX...

5 YEAR WARRANTY

120-277V
*

ACTIVE COOLING**

80+
CRI

ENCLOSED FIXTURES

-40°F TO 122°F
OPERATING TEMP

DAMP LOCATION
ENVIRONMENT

50,000hrs
L70
RATED LIFE

* ALSO WORKS ON 208V & 240V. ** EXCLUDES 8037-39 MODELS.

120-277V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
BOLLARD + POST TOP BALLAST BYPASS TYPE B							
LED-8015E30-G2	100W INC	14W	1792	3000K	E26	2.6" x 5.3"	 
LED-8015E40-G2			1918	4000K			
LED-8015E50-G2			1960	5000K			
 LED-8017E30-G2-DIM*	150W INC	20W	2540	3000K	E26	2.6" x 5.3"	 
 LED-8017E40-G2-DIM*			2720	4000K			
 LED-8017E50-G2-DIM*			2760	5000K			
LED-8017E345-G3	150W INC	20W	2400/ 2700 /2600	FLEXCOLOR 3000K/ 4000K /5000K	E26	2.8" x 5.5"	 
LED-8018E345-G3	200W INC	25W	3000/ 3375 /3250		E26	2.8" x 5.5"	 
LED-8019E345-G3	300W INC	35W	4200/ 4725 /4550		E26	3.4" x 6.8"	
LED-8019M345-G3	175W HID				EX39	3.4" x 7.1"	
LED-8020M345-G3	250W HID	45W	5400/ 6075 /5850		EX39	3.9" x 7.9"	
LED-8021M345-G3	320W HID	65W	7800/ 8775 /8450		EX39	4.7" x 9.2"	
LED-8061E22	150W HID	28W	3500	2200K	E26	3.0" x 7.6"	 
LED-8061E40			4000	4000K			
LED-8061E50				5000K			
LED-8062M22	175W HID	32W	4500	2200K	EX39	3.5" x 9.4"	
LED-8062M40			5500	4000K			
LED-8062M50				5000K			
LED-8063M22	250W HID	45W	6000	2200K		3.5" x 9.4"	
LED-8063M40			7500	4000K			
LED-8063M50				5000K			
LED-8064M22	320W HID	54W	8000	2200K	EX39	4.9" x 9.4"	
LED-8064M40			10000	4000K			
LED-8064M50				5000K			

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD.

* LED-8017-G2-DIM IS 120V ONLY. DIMMABLE ON MOST 120V LED RATED DIMMERS, PLEASE SEE WEBSITE FOR LIST OF COMPATIBLE DIMMERS.

BOLLARD + POST TOP



12 MODELS REPLACING UP TO 320W HID / 300W INC. Perfect for post top and bollard fixtures, these retrofits feature frosted lenses (801X + 802X models only) and shapes that closely mimic the outgoing lamp technology. Because of their traditional shapes, several feature Energy Star.



LED-8018 ➔

FROSTED LENS



LED-8062 ➔

AVAILABLE IN 2200K, 4000K & 5000K

5 YEAR WARRANTY

120-277V
★

UL TYPE B
BALLAST BYPASS

80+
CRI


ENCLOSURED FIXTURES

-40°F TO 113°F
OPERATING TEMP

50,000hrs
L70
RATED LIFE

120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
HIGH BAY BALLAST BYPASS TYPE B								
LED-8136M40D	LED-8136M40CD	250W	90W	12400	4000K	EX39	8.7" x 9.3"	 
LED-8136M50D	LED-8136M50CD			12900	5000K			
LED-8132M40D	LED-8132M40CD	400W	135W	18600	4000K	EX39	8.7" x 10"	
LED-8132M50D	LED-8132M50CD			19200	5000K			
 LED-8130M40D	LED-8130M40CD	400W	150W	20900	4000K	EX39	8.7" x 10"	
 LED-8130M50D	LED-8130M50CD			21200	5000K			
LED-8236M345D	LED-8236M345CD	250W	95W	13700/ 14400 /14600	FLEXCOLOR 3000K/ 4000K /5000K	EX39	8.7" x 9.7"	
LED-8232M345D		400W	140W	19900/ 20900 /21100		EX39	8.7" x 10.5"	
 LED-8232M345D-HV	LED-8232M345D-HV					EX39	10.3" x 12.5"	
LED-8242M40D		1000W	270W	38400	4000K	EX39	10.3" x 12.5"	
LED-8242M50D				38700	5000K			
 LED-8242M40D-HV	LED-8242M40D-HV			38400	4000K	EX39		
 LED-8242M50D-HV	LED-8242M50D-HV			38700	5000K			
HIGH BAY BALLAST COMPATIBLE TYPE A								
 LED-8030M40-MHBC		400W	140W	18619	4000K	EX39	9.1" x 9.2"	 
 LED-8030M57-MHBC				17047				
LOW BAY BALLAST BYPASS TYPE B								
LED-8056E40D-A		175W	45W	5334	4000K	E26	5.7" x 6.9"	 
LED-8056E50D-A				5560	5000K			
LED-8056M40D-A				5334	4000K	EX39		
LED-8056M50D-A				5560	5000K			
 LED-8035E40-A			175W	60W	6684	4000K	E26	5.7" x 7.4"
 LED-8035E57-A	7062				5700K			

LIGHT DISTRIBUTION / FOOT CANDLE COMPARISON / DLC CEILING-MOUNTED HIGH BAY FIXTURES

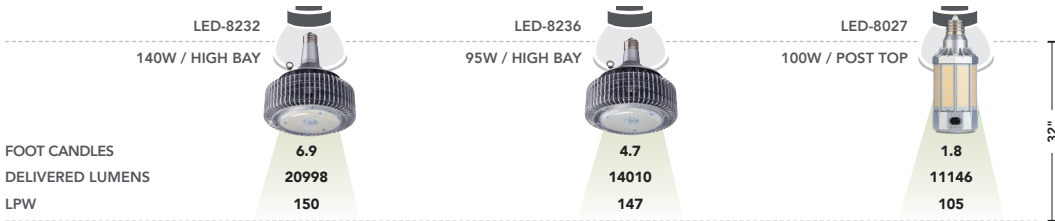

 **10kA SURGE PROTECTION**

 OPEN FIXTURE ONLY  ENCLOSED FIXTURES  INCLUDES UPLIGHT  HV 277/480V INCLUDING 347V  PLC FOR LISTING STATUS GO TO LED-LLC.COM

HIGH BAY + LOW BAY



9 MODELS REPLACING UP TO 1000W HID. Ultra-bright LED retrofits for high ceiling environments. Models w/o active cooling for open fixtures & silent operation. Models w/ active cooling are safe to install in enclosed fixtures. Low bay retrofits are ideal for ceiling fixtures that require light to be pushed down & out. Angled LED panels help direct light exactly where it is needed.



POWERFUL PERFORMANCE – FOR HIGH BAY ENVIRONMENTS

* EXCLUDES 8030 AND 8035 MODELS. ** EXCLUDES 8100 MODELS.

LIGHT EFFICIENT DESIGN / SCREW-IN RETROFITS

	120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS	
	SOX BALLAST BYPASS TYPE B									
1 8	LED-8100-22K		35W	20W	2030	2200K	B22D	12.2" x 2.8"		
	LED-8100-40K				3022	4000K		16.7" x 2.87"		
	LED-8101-22K		55W	35W	3232	2200K				20.5" x 2.8"
	LED-8101-40K				5156	4000K		43.5" x 2.8"		
	LED-8102-22K		90W	60W	5769	2200K				12.2" x 2.8"
	LED-8102-40K				8198	4000K		16.7" x 2.8"		
	LED-8104-22K		180W	100W	11576	2200K				20.5" x 2.8"
	LED-8104-40K				11576	4000K		43.5" x 2.8"		
	LED-8100-AMB		35W	20W	NA	AMBER				
	LED-8101-AMB		55W	35W						
	LED-8102-AMB		90W	60W						
	LED-8104-AMB		180W	100W						

HAZARDOUS LOCATION BALLAST BYPASS TYPE B									
LED-8929E57-HAZ	LED-8929E57C-HAZ	150W	24W		3425	5700K	E26	3.0" x 6.6"	
LED-8929M57-HAZ	LED-8929M57C-HAZ						EX39	3.0" x 6.9"	 
LED-8924E50-HAZ	LED-8924E50C-HAZ	250W	49W (347V)	45W (120/277V)	6620	5000K	E26	3.4" x 7.8"	
LED-8924M50-HAZ	LED-8924M50C-HAZ						EX39	3.4" x 7.8"	 

DEFAULT WATTAGE AND CCT FOR SUPERFLEX LAMPS ARE SHOWN IN BOLD.

SURGE ARRESTORS					
PART #	DESCRIPTION	ENCLOSURE	NOMINAL DISCHARGE CURRENT	STRIKE RATING	DIMENSIONS
SPD-277P-10KA-EC-1	10kA SURGE ARRESTOR, 120-277V, SERIES W/ THERMAL FUSE	ROUND IP65	10,000A	1@10kA, 2@6.5kA 15@3kA, 110@1.5kA	2.5" x 1.4"
SPD-347P-10KA	10kA SURGE ARRESTOR, 120-347V, SERIES W/ THERMAL FUSE	ROUND IP67			

STEP DOWN TRANSFORMERS						
PART #	DESCRIPTION	MAX WATTAGE	VOLTAGE	THD	POWER FACTOR	DIMENSIONS
MTM04506224C-LW	450VA STEP DOWN TRANSFORMER	400W	480/347V IN / 277V OUT	3.4% / 3.8%	0.99	4.2" x 2.7" x 2.2"
MTM01606224C-LW	160VA STEP DOWN TRANSFORMER	140W		4.3% / 4.1%	0.99	4.2" x 2.0" x 1.6"
MTM00506224C-LW	50VA STEP DOWN TRANSFORMER	45W	480/347V IN / 240V OUT	6.2% / 6.7%	0.98 / 0.97	3.0" x 1.7" x 1.4"

 ENCLOSED FIXTURES  LISTED FOR CLASS 1, DIV 2 HAZ LOCATIONS (SEE OUR WEBSITE FOR A LIST OF APPROVED FIXTURE)  SUPPORT HARNESS INCLUDED TO ELIMINATE SOCKET SAG

SOX + HAZARDOUS LOCATION



THE MOST UNIQUE RETROFITS, BROUGHT TO YOU BY THE LEADER! Hazardous location fixtures are expensive, retrofitting them w/ UL approved lamps is NOT. Two wattages to choose from. SOX retrofits in 4 lengths to adequately fill out the long, narrow fixtures.



LED-8101

LED-8924

4 LENGTH OPTIONS TO FILL THE ENTIRE FIXTURE

HAZARDOUS LOCATION – CLASS 1 DIV 2

 5 YEAR WARRANTY

 120-277V
*

 UL TYPE B
BALLAST BYPASS

 80+
CRI

 ACTIVE COOLING

 OPERATING TEMP
-40°F TO 122°F
SOX

 -40°F TO 113°F
HAZARDOUS

 50,000hrs
RATED LIFE

* ALSO WORKS ON 208V & 240V.

LIGHT EFFICIENT DESIGN / SCREW-IN RETROFITS

RECESSED CAN



REPLACING 100W HID/150W INC. Recessed can fixtures are one of the most common ways to light any commercial space. Our dimmable models will help save even more energy and make interior spaces more appealing.



QUICK & EASY ENERGY SAVINGS



120-277V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BEAM ANGLE	BASE	DIMENSIONS	LISTINGS
RECESSED CAN BALLAST BYPASS TYPE B								
LED-8054E27-G2	150W INC 100W HID	30W	2500	2700K	140°	E26	4.2" X 4.8"	 
LED-8054E35-G2			3000	3500K				
LED-8054E40-G2			3000	4000K				
LED-8054E50-G2			3000	5000K				
 LED-8054E35-G2-DIM*	150W INC 100W HID	30W	3000	3500K	140°	E26	4.2" X 4.8"	 
 LED-8054E40-G2-DIM*			3000	4000K				
 LED-8054E50-G2-DIM*			3000	5000K				

* LED-8054-G2-DIM ARE 120V ONLY. DIMMABLE ON MOST 120V LED RATED DIMMERS, PLEASE SEE WEBSITE FOR LIST OF COMPATIBLE DIMMERS.



FANLESS –
FOR SILENT OPERATION



EFFICIENT DIE-CAST ALUMINUM
HEAT SINK KEEPS THE FIXTURE COOL



RATED FOR DAMP LOCATION
& OPEN FIXTURE



5
YEAR
WARRANTY



120-
277V

*



UL TYPE
B

BALLAST BYPASS



80+

CRI



-4°F TO 105°F

OPERATING TEMP



L70

50,000hrs
RATED LIFE



2
PIN

TYPE A/B PL LAMPS



5W | LED-7300
REPLACES 9W
GX23

TYPE B PL LAMPS



7W | LED-7310-G3
REPLACES 32W
G24d
[GX24q/4 PIN]


MOUNTING



TYPE A/B PL LAMPS



10W | LED-7320-FC1-G4
REPLACES 42W
G24q/GX24q



10W | LED-7320-FC2-G4
REPLACES 42W
G24q/GX24q

FLEXCOLOR — SWITCH
BETWEEN 3 COLOR TEMPS

4
PIN

TYPE A PL LAMPS



10W | LED-7330
REPLACES 26W
G24q/GX24q

TYPE B PL LAMPS



7W | LED-7310-G3
REPLACES 32W
G24q
[G24d/2 PIN]



23W | LED-7340
REPLACES 42W
2G11



11W | LED-7324-G3
REPLACES 42W
G24q/GX24q



11W | LED-7334-G3
REPLACES 26W
G24q/GX24q



12W | LED-7318
REPLACES 26W
G24q/GX24q



12W | LED-7338
REPLACES 26W
G24q/GX24q



25W | LED-7342
REPLACES 42W
G24q/GX24q

COMPATIBLE BASES



COMPATIBLE BASES



OVER A DOZEN MODELS FOR THE PERFECT SOLUTION. Our latest pin-based LED retrofits are perfect for PL applications, and provide a long-lasting LED alternative for areas in offices, hotels, lobbies, schools, etc. TYPE A/B, A and B to choose from, in several shapes.



LED-7320-FC2



HIGHEST QUALITY

PIN-BASED RETROFITS FOR ANY APPLICATION

* ALSO WORKS ON 208V & 240V.

SAFE FOR ENCLOSED FIXTURES OMNI-DIRECTIONAL VERTICAL HORIZONTAL



LIGHT EFFICIENT DESIGN / PIN-BASE RETROFITS

PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	MOUNTING	DIMENSIONS	LISTINGS
PL UNIVERSAL TYPE A/B								
LED-7300-27K-G2	9W 2-PIN	5W	550	2700K	 GX23		5.5" X 1.4"	 
LED-7300-35K-G2				3500K				
LED-7300-40K-G2				4000K				
LED-7300-50K-G2				5000K				
LED-7311-27K-G3	13W 2-PIN	7W	840	2700K	 G23-2		5.9" X 1.3"	 
LED-7311-35K-G3			880	3500K				
LED-7311-40K-G3			910	4000K				
LED-7311-50K-G3			920	5000K				
LED-7312-27K-G3	13W 2-PIN	7W	820	2700K	 GX23-2		5.9" X 1.3"	 
LED-7312-35K-G3			870	3500K				
LED-7312-40K-G3			880	4000K				
LED-7312-50K-G3			910	5000K				
LED-7318-27A	26W 4-PIN CFL	12W	837	2700K	 G24q/GX24q*		3.8" X 3.0"	 
LED-7318-35A			1157	3500K				
LED-7318-40A			1198	4000K				
LED-7322-27K-G3	26W 2-PIN	7W	820	2700K	 G24d/G24q		5.7" X 1.3"	 
LED-7322-35K-G3			870	3500K				
LED-7322-40K-G3			900	4000K				
LED-7322-50K-G3			930	5000K				
LED-7320-FC1-G4	42W 4-PIN CFL	10W	1400	FLEXCOLOR 3000K/3500K/4000K	 G24q/GX24q		6.6" X 1.4"	 
LED-7320-FC2-G4				FLEXCOLOR 2700K/4000K/5000K				
LED-7324-27K-G3	42W 4-PIN CFL	11W	1050	2700K	 G24q/GX24q		5.6" X 1.3"	 
LED-7324-35K-G3			1125	3500K				
LED-7324-40K-G3			1200	4000K				
LED-7324-50K-G3			1200	5000K				

* G24q BASE CAN BE USED ONLY w/LED-7318 IF BYPASSING THE BALLAST.



OPEN FIXTURE ONLY



ENCLOSED FIXTURE RATED (MAY ALSO BE USED IN OPEN FIXTURE)



OMNI-DIRECTIONAL



VERTICAL



HORIZONTAL

LIGHT EFFICIENT DESIGN / PIN-BASE RETROFITS

PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	MOUNTING	DIMENSIONS	LISTINGS
PL BALLAST COMPATIBLE TYPE A								
LED-7330-27K-G2	26W 4-PIN CFL	10W	760	2700K	 G24q/GX24q		6.8" X 1.3"	 
LED-7330-35K-G2			850	3500K				
LED-7330-40K-G2			916	4000K				
LED-7334-27K-G3	32W 4-PIN CFL	12W	1100	2700K	 G24q/GX24q		5.8" X 1.4"	 
LED-7334-35K-G3				3500K				
LED-7334-40K-G3				4000K				
LED-7338-35A				3500K				
LED-7338-40A				4000K				
PL + PLL BALLAST BYPASS TYPE B								
LED-7310-27K-G3	32W 2-PIN or 4-PIN CFL	7W	890	2700K	 G24d/G24q		5.5" X 1.4"	 
LED-7310-35K-G3			949	3500K				
LED-7310-40K-G3			970	4000K				
LED-7310-50K-G3			990	5000K				
LED-7340-30K-G2	40W 4-PIN CFL	17W	2100	3000K	 2G11		22" X 1.5"	 
LED-7340-35K-G2				3500K				
LED-7340-40K-G2			2200	4000K				
LED-7340-50K-G2				5000K				
LED-7342-27K-G2	42W 4-PIN CFL	25W	2000	2700K	 G24q/GX24q		4.2" X 3.7"	 
LED-7342-35K-G2			2500	3500K				
LED-7342-40K-G2				4000K				

LINEAR T8 + T5 RETROFITS



PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS	
T8 BALLAST COMPATIBLE + BALLAST BYPASS TYPE A+B								
LED-10T8-FCAB24-G4	17W	10W	1450	FLEXCOLOR 3000K/3500K 4000K/5000K 6500K	G13	24.0" x 1.0"		
LED-11T8- FCAB36-G4	25W	11W	1650			36.0" x 1.0"		
LED-12T8-FCAB48-G4	32W	12W	1800			48.0" x 1.0"		
LED-15T8- FCAB48-G4		15W	2200					

DEFAULT CCT FOR FLEXCOLOR IS SHOWN IN BOLD.

T8 BALLAST BYPASS TYPE B							
LED-9T8-840DE24-G3	17W	9W	1150	4000K	G13	24.0" x 1.0"	
LED-12T8-840DE36-G3	25W	12W	1450			36.0" x 1.0"	
LED-12T8-840DE48-G3	32W		1800			48.0" x 1.0"	
LED-42T82P-840DE96-G4	54-86W	42W	5040	4000K	FA8	96.0" x 1.0"	
LED-42T82P-850DE96-G4				5000K		R17D	
LED-42T82P-840HO96-G4	54-86W	42W		4000K			
LED-42T82P-850HO96-G4				5000K			

T5 BALLAST COMPATIBLE + BALLAST BYPASS TYPE A+B							
RP-TOTALTUBE-T5-2FT-835-G4	24W	12W	1350	3500K	G5 MINI BI-PIN	24.0" x 1.0"	
RP-TOTALTUBE-T5-2FT-840-G4			1500	4000K			
RP-TOTALTUBE-T5-2FT-850-G4				5000K			
RP-TOTALTUBE-T5-3FT-835-G4	39W	18W	2025	3500K	G5 MINI BI-PIN	36.0" x 1.0"	
RP-TOTALTUBE-T5-3FT-840-G4			2250	4000K			
RP-TOTALTUBE-T5-3FT-850-G4				5000K			
RP-TOTALTUBE-T5-4FT-835-G4	54W	24W	3200	3500K	G5 MINI BI-PIN	48.0" x 1.0"	
RP-TOTALTUBE-T5-4FT-840-G4			3500	4000K			
RP-TOTALTUBE-T5-4FT-850-G4				5000K			

FOR LISTING STATUS GO TO LED-LLC.COM

ENERGY SAVING REPLACEMENTS FOR FLUORESCENT T8, T5 AND U-BEND LAMPS. Every size and installation method you need — in the highest quality, best light output design. Install our retrofits to get worry-free operation for years to come.



LED-10T8-FCA

ENERGY SAVING REPLACEMENTS FOR ANY FACILITY

UL TYPE

BALLAST BYPASS OR COMPATIBLE

A+B

FCAB / T5 MODELS

BALLAST BYPASS

B

ALL OTHER MODELS

POWER INPUT

SINGLE OR DOUBLE-ENDED

FCAB / T5 MODELS

DOUBLE-ENDED

ALL OTHER MODELS

OPERATING TEMP

-40°F TO 104°F

FCAB MODELS

-40°F TO 113°F

ALL OTHER MODELS

* T8 (TYPE B) AND T5 (TYPE A+B) MODELS ALSO WORK ON 208V & 240V.



4 MODELS REPLACING UP TO 400W HID & 900W INC. Super bright and durable, our LED work site lights reduce costs and labor with integrated power cord and daisy-chain feature. Several wattages and connection options to choose from will make lighting any work site easier than ever.

PART #	VOLTAGE	PWR CORD	DAISY-CHAIN	REPLACES	WATTAGE	LUMENS	COLOR	DIMENSIONS	LISTINGS
TEMPORARY WORK SITE LIGHTS									
LED-9006-50K	120V	20 FT POWER CORD	UP TO 10 LIGHTS	250W HID	60W	6600	5000K	6.2" X 10.7"	
LED-9010-50K	120V	35 FT POWER CORD	UP TO 6 LIGHTS	400W HID	100W	11000		6.2" X 12.2"	
LED-9011-50K-G2	120V	35 FT POWER CORD	UP TO 10 LIGHTS						
HIGH BAY WORK SITE LIGHTS BALLAST BYPASS TYPE B									
LED-9210-50K-G2	120-277V*	6 FT POWER CORD W/ STRIPPED LEADS	NA	400W HID	100W	12000	5000K	6.5" X 12.7"	
* UL LISTED FOR 120-277VAC. ALSO WORKS ON 208V & 240V.									
TEMPORARY WORK SITE STRING LIGHTS									
LED-9003-50K-5PK-182-G2	120V	50 FT STRING	UP TO 10 STRINGS	300W INC	40W (5 X 8W)	5000/STRING	5000K	4.4" X 3.1"	
LED-9003-50K-10PK-163-G3	120V	100 FT STRING	UP TO 5 STRINGS	900W INC	120W (10 X 12W)	15000/STRING			
LED-9003-50K-10PK-182-G3			UP TO 4 STRINGS		130W (10 X 13W)	16000/STRING			



LED-9010

35 FT POWER CORD



LED-9003-182

CONNECT UP TO 4 STRINGS / 400 FT



120-277V

**

80+

CRI

DAISY-CHAIN ***

OPERATING TEMP

-40°F TO 104°F

9003 MODELS

-40°F TO 122°F

9006 / 9010 / 9011 / 9210 MODELS

INGRESS PROTECTION

IP65 RATED

9003 MODELS

IP64 RATED

9006 / 9010 / 9011 / 9210 MODELS

L70

50,000hrs RATED LIFE



KEEP IN TOUCH

SALES + MARKETING MATERIALS





TRY OUR INNOVATIVE LED SOLUTIONS WITH NO RISK...
sales@led-llc.com



ASK ABOUT OUR TRAININGS IN MIDDLETON MA OR CARY IL...
edison@led-llc.com



STAY UP TO DATE BY JOINING OUR BI-MONTHLY WEBINARS...
edison@led-llc.com



WE ARE HERE TO HELP. ASK EDISON AT...
edison@led-llc.com








DOWNLOAD DIGITAL CATALOGS FOR ALL OF OUR BRANDS...

















SCAN HERE FOR A COMPLETE LIST INCLUDING



DISPLAYS, BANNERS, PRODUCT GONDOLAS AND MORE

* UP TO 4 PIECES. SIMPLY RETURN IN ORIGINAL PACKAGING WITHIN 60 DAYS. NO RESTOCKING FEE. NO QUESTIONS ASKED.





CORPORATE HQ & TRAINING CENTER • CARY, IL | INNOVATION & MANUFACTURING CENTER • Middleton, MA
847.380.3540 • led-llc.com • sales@led-llc.com