




 **Light Efficient Design**  **LEADING THRU INNOVATION**

120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	CCT	BASE	DIMENSIONS	LISTINGS
BOLLARD + POST TOP BALLAST BYPASS TYPE B								
LED-8037E345-A		50W	11W	1550/ 1610 /1650	FLEX COLOR 3000K/ 4000K /5000K	E26	2.6" x 5.3"	
LED-8038E345-A	LED-8038E345C-A	70W	14W	1850/ 1950 /1990		E26	2.6" x 5.3"	
LED-8039E345D-A	LED-8039E345C-A	100W	18W	2450/ 2560 /2610		E26	2.6" x 6.3"	
LED-8039M345D-A	LED-8039M345C-A					EX39	2.6" x 7.0"	
LED-8029E345-A-FW	LED-8029E345C-A-FW	70W/100W/150W	FLEX WATT 12W/ 18W /24W	1550-3360	FLEX COLOR 3000K/ 4000K /5000K	E26	3.0" x 6.6"	
LED-8029M345-A-FW	LED-8029M345C-A-FW						EX39	3.0" x 6.9"
LED-8024E345-G7-FW	LED-8024E345C-G7-FW	175W/250W/320W	FLEX WATT 35W/ 45W /60W	5140-8870		E26	3.4" x 7.4"	
LED-8024M345-G7-FW	LED-8024M345C-G7-FW						EX39	3.4" x 7.8"
LED-8027M345-G7-FW		320W/400W	FLEX WATT 80W/ 100W /110W	11370-15730		EX39	3.8" x 9.5"	
LED-8027M345-G7-FW-HV	LED-8027M345-G7-FW-HV							
LED-8075M345-FW		750W	FLEX WATT 300W/ 360W /450W	50100-73300	FLEX COLOR 3000K/ 4000K /5000K	EX39	5.6" x 12.3"	
LED-8075M345-FW-HV	LED-8075M345-FW-HV	750W						
LED-8000M345-FW-MV	LED-8000M345-FW-MV	1000W	FLEX WATT 150W/ 200W /270W	21700-39000				
LED-8000M345-FW-HV		1000W						
LED-8033E30D-G7		175W	35W	5140	3000K	E26	3.4" x 7.2"	
LED-8033E40D-G7				5290	4000K			
LED-8033E50D-G7				5360	5000K			
LED-8033M30D-G7				5140	3000K	EX39	3.4" x 7.8"	
LED-8033M40D-G7				5290	4000K			
LED-8033M50D-G7				5360	5000K			

DEFAULT WATTAGE AND CCT FOR SUPERFLEX LAMPS ARE SHOWN IN BOLD.

SIZE COMPARISON

SMALLER BECAUSE SIZE DOES MATTER

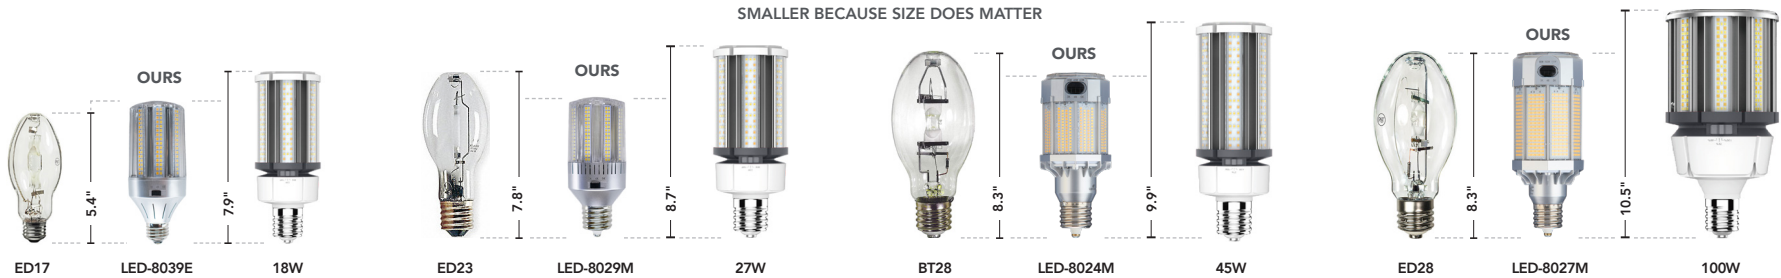

BOLLARD + POST TOP



9 MODELS REPLACING UP TO 1000W HID. Keep the look and feel of your existing fixture, while saving energy and maintenance costs. Several models feature FlexWATT and FlexCOLOR allowing for substantial sku reduction and in-field adjustability.



LED-8038 ➡



LED-8000 ➡

LED-8024 ➡

MULTIPLE VOLTAGE OPTIONS ON 8000 INCLUDING 480V

& LONGER NECK TO BETTER FIT FIXTURES

5 YEAR WARRANTY

UL TYPE B
BALLAST BYPASS

ACTIVE COOLING*

80+
CRI

ENCLOSED FIXTURES

OPERATING TEMP

-40°F TO 113°F
8029 / 8024 / 8027

-40°F TO 122°F
8037 / 8038 / 8039
8033 / 8000 / 8075

DAMP LOCATION
ENVIRONMENT

L70
50,000hrs
RATED LIFE

MODELS

* EXCLUDES 8037-39 MODELS.

120-277V PART #	REPLACES	WATTAGE	LUMENS	CCT	BASE	DIMENSIONS	LISTINGS
BOLLARD + POST TOP BALLAST BYPASS TYPE B							
LED-8015E30-G2	100W INC 70W HID	14W	1792	3000K	E26	2.6" x 5.3"	 
LED-8015E40-G2			1918	4000K			
LED-8015E50-G2			1960	5000K			
 LED-8017E30-G2-DIM*	150W INC 100W HID	20W	2540	3000K	E26	2.6" x 5.3"	
 LED-8017E40-G2-DIM*			2720	4000K			
 LED-8017E50-G2-DIM*			2760	5000K			
LED-8017E345-G3	150W INC / 100W HID	20W	2400/ 2700 /2600	FLEXCOLOR 3000K/ 4000K /5000K	E26	2.8" x 5.5"	
LED-8018E345-G3	200W INC / 150W HID	25W	3000/ 3375 /3250			3.4" x 6.8"	
LED-8019E345-G3	300W INC / 175W HID	35W	4200/ 4725 /4550			EX39	
LED-8019M345-G3	175W HID				EX39	3.9" x 7.9"	
LED-8020M345-G3	250W HID				45W	5400/ 6075 /5850	
LED-8021M345-G3	320W HID	65W	7800/ 8775 /8450				
LED-8060E22	100W HID	15W	2250	2200K	E26	2.2" x 6.4"	 
LED-8060E40			2700	4000K			
LED-8060E50				5000K			
LED-8061E22	150W HID	28W	3500	2200K	E26	3.0" x 7.6"	
LED-8061E40			4000	4000K			
LED-8061E50				5000K			
LED-8062M22	175W HID	32W	4500	2200K	EX39	3.5" x 9.4"	
LED-8062M40			5500	4000K			
LED-8062M50				5000K			
LED-8063M22	250W HID	45W	6000	2200K	EX39	3.5" x 9.4"	
LED-8063M40			7500	4000K			
LED-8063M50				5000K			
LED-8064M22	320W HID	54W	8000	2200K	EX39	4.9" x 9.4"	
LED-8064M40			10000	4000K			
LED-8064M50				5000K			
LED-8065M22	400W HID	85W	13600	2200K	EX39	4.8" x 11.5"	
LED-8065M40			15725	4000K			
LED-8065M50				5000K			

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD.

* LED-8017-G2-DIM IS 120V ONLY. DIMMABLE ON MOST 120V LED RATED DIMMERS, PLEASE SEE WEBSITE FOR LIST OF COMPATIBLE DIMMERS.

BOLLARD + POST TOP



12 MODELS REPLACING UP TO 400W HID. Perfect for post top and bollard fixtures, these retrofits feature frosted lenses (801X + 802X models only) and shapes that closely mimic the outgoing lamp technology. Because of their traditional shapes, several feature Energy Star.



FROSTED LENS



AVAILABLE IN 2200K, 4000K & 5000K

 5 YEAR WARRANTY

 120-277V

 UL TYPE B

 80+ CRI

 ENCLOSED FIXTURES

 -40°F TO 113°F OPERATING TEMP

 50,000hrs RATED LIFE

* ALSO WORKS ON 208V & 240V. LED-8017-G2-DIM IS 120V ONLY.

120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	CCT	BASE	DIMENSIONS	LISTINGS
SHOE BOX + WALL PACK BALLAST BYPASS TYPE B								
LED-8086E30-G4		70W	20W	2800	3000K	E26	2.6" x 5.2"	
LED-8086E40-G4				2800	4000K			
LED-8086E50-G4				2880	5000K			
LED-8087E345D-G4	LED-8087E345CD-G4	100W	30W	3500/ 4200 /4300	FLEX COLOR 3000K/ 4000K /5000K	E26	3.0" x 6.4"	
LED-8087M345D-G4	LED-8087M345CD-G4					EX39	3.0" x 6.9"	
LED-8088E345D-G4	LED-8088E345CD-G4	175W	50W	6400/ 6900 /7200		E26	3.8" x 7.9"	
LED-8088M345D-G4	LED-8088M345CD-G4					EX39	3.8" x 8.5"	
LED-8089M345D-G4	LED-8089M345CD-G4	4.3" x 10.0"						
LED-8090M345D-G4		400W	110W	14500/ 15400 /15700			4.3" x 11.4"	
LED-8090M345D-G4-HV	LED-8090M345D-G4-HV							
LED-8089M30D-G5		250W	80W	10670	3000K	EX39	4.3" x 8.3"	
LED-8089M40D-G5				10760	4000K			
LED-8089M50D-G5				10850	5000K			
LED-8091M40D		1000W	320W	43380	4000K	EX39	9.0" x 12.7" (PANEL)	
LED-8091M50D				44610	5000K			
LED-8091M40D-HV	LED-8091M40D-HV	1000W	320W	43380	4000K		4.7" x 11.2" (DRIVER)	
LED-8091M50D-HV	LED-8091M50D-HV			44610	5000K			

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD.



SHOE BOX + WALL PACK



7 MODELS REPLACING UP TO 1000W HID. Retrofit almost any shoe box or wall pack fixture to energy & maintenance saving LEDs. Eliminate ballast failures. FlexCOLOR on several models allows for less stocked inventory as well as field adjustability.



LED PANEL ADHERES TO FIXTURE LENS



ROTATABLE BASE – DIRECTS LUMENS OUT OF FIXTURE

5 YEAR WARRANTY

120-277V

ACTIVE COOLING

80+ CRI

ENCLOSED FIXTURES

-40°F TO 122°F


DAMP LOCATION

50,000hrs RATED LIFE



120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	CCT	BASE	DIMENSIONS	LISTINGS
HIGH BAY BALLAST BYPASS TYPE B								
LED-8136M40D	LED-8136M40CD	250W	90W	12400	4000K	EX39	8.7" x 9.3"	 
LED-8136M50D	LED-8136M50CD			12900	5000K			
LED-8132M40D	LED-8132M40CD	400W	135W	18600	4000K	EX39	8.7" x 10"	
LED-8132M50D	LED-8132M50CD			19200	5000K			
 LED-8130M40D	LED-8130M40CD	400W	150W	20900	4000K	EX39	8.7" x 10"	
 LED-8130M50D	LED-8130M50CD			21200	5000K			
LED-8236M345D	LED-8236M345CD	250W	95W	13700/14400/14600	FLEXCOLOR 3000K/4000K/5000K	EX39	8.7" x 9.7"	 
LED-8232M345D		400W	140W	19900/20900/21100		EX39	8.7" x 10.5"	
 LED-8232M345D-HV	LED-8232M345D-HV					EX39	10.3" x 12.5"	
LED-8242M40D		1000W	270W	38400	4000K	EX39	10.3" x 12.5"	
LED-8242M50D				38700	5000K			
 LED-8242M40D-HV	LED-8242M40D-HV			38400	4000K	EX39		
 LED-8242M50D-HV	LED-8242M50D-HV			38700	5000K			
HIGH BAY BALLAST COMPATIBLE TYPE A								
 LED-8030M40-MHBC		400W	140W	18619	4000K	EX39	9.1" x 9.2"	 
 LED-8030M57-MHBC				17047				
LOW BAY BALLAST BYPASS TYPE B								
LED-8056E40D-A		175W	45W	5334	4000K	E26	5.7" x 6.9"	
LED-8056E50D-A				5560	5000K			
LED-8056M40D-A				5334	4000K	EX39		 
LED-8056M50D-A				5560	5000K			
 LED-8035E40-A		175W	60W	6684	4000K	E26	5.7" x 7.4"	
 LED-8035E57-A				7062	5700K			

LIGHT DISTRIBUTION / FOOT CANDLE COMPARISON / DLC CEILING-MOUNTED HIGH BAY FIXTURES

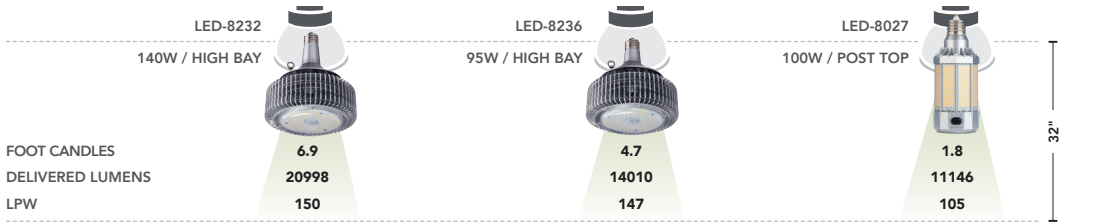

SURGE PROTECTION

HIGH BAY + LOW BAY



9 MODELS REPLACING UP TO 1000W HID. Ultra-bright LED retrofits for high ceiling environments. Models w/o active cooling for open fixtures & silent operation. Models w/ active cooling are safe to install in enclosed fixtures. Low bay retrofits are ideal for ceiling fixtures that require light to be pushed down & out. Angled LED panels help direct light exactly where it is needed.



POWERFUL PERFORMANCE – FOR HIGH BAY ENVIRONMENTS



* EXCLUDES 8030 AND 8035 MODELS. ** EXCLUDES 8100 MODELS.



120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	CCT	BASE	DIMENSIONS	LISTINGS
SOX BALLAST BYPASS TYPE B								
LED-8100-22K		35W	20W	2030	2200K	B22D	12.2" x 2.8"	
LED-8100-40K				3022	4000K			
LED-8100-AMB*				NA	AMBER			
LED-8101-22K		55W	35W	3232	2200K		16.7" x 2.9"	
LED-8101-40K				5156	4000K			
LED-8101-AMB*				NA	AMBER			
LED-8102-22K		90W	60W	5769	2200K		20.5" x 2.8"	
LED-8102-40K				8198	4000K			
LED-8102-AMB				NA	AMBER			
LED-8104-22K		180W	100W	11576	2200K		43.5" x 2.8"	
LED-8104-40K				11576	4000K			
LED-8104-AMB*				NA	AMBER			

HAZARDOUS LOCATION BALLAST BYPASS TYPE B									
LED-8929E57-HAZ	LED-8929E57C-HAZ	150W	24W		3425	5700K	E26	3.0" x 6.6"	
LED-8929M57-HAZ	LED-8929M57C-HAZ						EX39	3.0" x 6.9"	
LED-8924E50-HAZ	LED-8924E50C-HAZ	250W	49W (347V)	45W (120/277V)	6620	5000K	E26	3.4" x 7.8"	
LED-8924M50-HAZ	LED-8924M50C-HAZ						EX39	3.4" x 7.8"	

DEFAULT WATTAGE AND CCT FOR SUPERFLEX LAMPS ARE SHOWN IN BOLD.

SURGE ARRESTORS					
PART #	DESCRIPTION	ENCLOSURE	NOMINAL DISCHARGE CURRENT	STRIKE RATING	DIMENSIONS
SPD-277P-10KA-EC-1	10kA SURGE ARRESTOR, 120-277V, SERIES W/ THERMAL FUSE	ROUND IP65	10,000A	1@10kA, 2@6.5kA 15@3kA, 110@1.5kA	2.5" x 1.4"
SPD-347P-10KA	10kA SURGE ARRESTOR, 120-347V, SERIES W/ THERMAL FUSE	ROUND IP67			

STEP DOWN TRANSFORMERS						
PART #	DESCRIPTION	MAX WATTAGE	VOLTAGE	THD	POWER FACTOR	DIMENSIONS
MTM04506224C-LW	450VA STEP DOWN TRANSFORMER	400W	480/347V IN / 277V OUT	3.4% / 3.8%	0.99	4.2" x 2.7" x 2.2"
MTM01606224C-LW	160VA STEP DOWN TRANSFORMER	140W		4.3% / 4.1%	0.99	4.2" x 2.0" x 1.6"
MTM00506224C-LW	50VA STEP DOWN TRANSFORMER	45W	480/347V IN / 240V OUT	6.2% / 6.7%	0.98 / 0.97	3.0" x 1.7" x 1.4"

SOX + HAZARDOUS LOCATION



THE MOST UNIQUE RETROFITS, BROUGHT TO YOU BY THE LEADER! Hazardous location fixtures are expensive, retrofitting them w/ UL approved lamps is NOT. Two wattages to choose from. SOX retrofits in 4 lengths to adequately fill out the long, narrow fixtures.



4 LENGTH OPTIONS TO FILL THE ENTIRE FIXTURE

HAZARDOUS LOCATION – CLASS 1 DIV 2

-40°F TO 122°F

-40°F TO 113°F

MODELS

SOX

HAZARDOUS



RECESSED CAN



REPLACING 100W HID. Recessed can fixtures are one of the most common ways to light any commercial space. Our dimmable models will help save even more energy and make interior spaces more appealing.



QUICK & EASY ENERGY SAVINGS

DESIGNED WITH 140° BEAM ANGLE

120-277V PART #	REPLACES	WATTAGE	LUMENS	CCT	BEAM ANGLE	BASE	DIMENSIONS	LISTINGS
RECESSED CAN BALLAST BYPASS TYPE B								
LED-8054E27-G2	150W INC 100W HID	30W	2500	2700K	140°	E26	4.2" x 4.8"	 
LED-8054E35-G2			3000	3500K				
LED-8054E40-G2			3000	4000K				
LED-8054E50-G2			3000	5000K				
 LED-8054E35-G2-DIM*	150W INC 100W HID	30W	3000	3500K		E26	4.2" x 4.8"	 
 LED-8054E40-G2-DIM*			3000	4000K				
 LED-8054E50-G2-DIM*			3000	5000K				

* LED-8054-G2-DIM ARE 120V ONLY. DIMMABLE ON MOST 120V LED RATED DIMMERS, PLEASE SEE WEBSITE FOR LIST OF COMPATIBLE DIMMERS.



FANLESS —
FOR SILENT OPERATION



EFFICIENT DIE-CAST ALUMINUM
HEAT SINK KEEPS THE FIXTURE COOL



RATED FOR DAMP LOCATION
& OPEN FIXTURE



*



BALLAST BYPASS



CRI



-4°F TO 105°F

OPERATING TEMP



50,000hrs
RATED LIFE



TYPE A + B

FLEXCOLOR

FLEXCOLOR




TYPE A



4-PIN

TYPE B

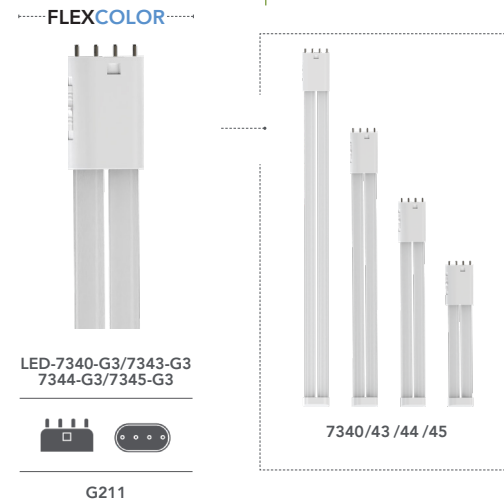

4-PIN

OVER A DOZEN MODELS FOR THE PERFECT SOLUTION. Our latest pin-based LED retrofits now feature FlexCOLOR allowing for substantial sku reduction and in-field adjustability. Perfect for PL applications, and provide a long-lasting LED alternative for areas in offices, hotels, lobbies, schools, etc.



90° ROTATABLE HEAD



NOW WITH FLEXCOLOR...

& EXTENDED END CAP



*



CRI

7311 / 7312 / 7313
7314 / 7322 / 7324 / 73347340 / 7343
7344 / 7345

7316 / 7318 / 7328

7300 / 7310
7320 / 733050,000hrs
RATED LIFE

LIGHT EFFICIENT DESIGN / PIN-BASE RETROFITS

OPEN FIXTURE ONLY

ENCLOSED FIXTURE RATED (MAY ALSO BE USED IN OPEN FIXTURE)

* ALSO WORKS ON 208V & 240V.



PART #	REPLACES UP TO	WATTAGE	LUMENS	CCT	BASE	MOUNTING	DIMENSIONS	LISTINGS
PL UNIVERSAL TYPE A+B								
LED-7300-27K-G2	9W / 2-PIN CFL	5W	550	2700K	GX23		5.5" x 1.4"	
LED-7300-35K-G2				3500K				
LED-7300-40K-G2				4000K				
LED-7300-50K-G2				5000K				
LED-7310-FC-G4	26W / 2-PIN CF	9W	1104-1243	FLEXCOLOR 2700/3000K/3500K/4000K	G24d		6.9" x 1.4"	
LED-7313-FC-G4	9W / 2-PIN CFL	3.5W	389-428		G23		5.3" x 1.3"	
LED-7314-FC-G4	13W / 2-PIN CFL	5.5W	628-696		GX23		7.0" x 1.4"	
LED-7311-FC1-G4	26W / 2-PIN CFL	7W	900-950	FLEXCOLOR 3000K/3500K/4000K	G23-2		5.5" x 1.4"	
LED-7312-FC1-G4					GX23-2			
LED-7322-FC1-G4					G24d			
LED-7320-FC1-G4	42W / 4-PIN CFL	10W	1400	FLEXCOLOR 3000K/3500K/4000K	G24q GX24q		6.6" x 1.4"	
LED-7320-FC2-G4				FLEXCOLOR 2700K/4000K/5000K				
LED-7324-FC1-G4	42W / 4-PIN CFL	9W	1400	FLEXCOLOR 3000K/3500K/4000K	G24q GX24q		5.7" x 1.3"	
LED-7324-FC2-G4			1300-1400	FLEXCOLOR 2700K/4000K/5000K				
LED-7316-FC-G2	32W / 2-PIN CFL	9W	1100	FLEXCOLOR 2700/3000K/3500K/4000/5000K	G24d		6.8" x 2.4"	
LED-7318-FC-G2	32W / 4-PIN CFL				G24q			
LED-7328-FC-G2	42W / 4-PIN CFL	16W	1850		G24q			

PART #	REPLACES UP TO	WATTAGE	LUMENS	CCT	BASE	MOUNTING	DIMENSIONS	LISTINGS
PL BALLAST COMPATIBLE TYPE A								
LED-7330-27K-G2	26W / 4-PIN CFL	10W	760	2700K	G24q GX24q		6.8" x 1.3"	 
LED-7330-35K-G2			850	3500K				
LED-7330-40K-G2			916	4000K				
LED-7334-27K-G2	32W / 4-PIN CFL	12W	1100	2700K	G24q GX24q		5.8" x 1.4"	 
LED-7334-35K-G2				3500K				
LED-7334-40K-G2				4000K				
PL + PLL BALLAST BYPASS TYPE B								
LED-7340-FC-G3	40W / 4-PIN CFL	17W	2024-2228	FLEXCOLOR 3000K/3500K/4000K/5000K/6500K	2G11		22" x 1.7"	 
LED-7343-FC-G3	36W / 4-PIN CFL	16W	1900-2000				16" x 1.7"	
LED-7344-FC-G3	24W / 4-PIN CFL	10W	1180-1250				12" x 1.7"	
LED-7345-FC-G3	18W / 4-PIN CFL	8.5W	930-980				8.5" x 1.7"	



OPEN FIXTURE ONLY



ENCLOSED FIXTURE RATED (MAY ALSO BE USED IN OPEN FIXTURE)



OMNI-DIRECTIONAL



VERTICAL



HORIZONTAL

LIGHT EFFICIENT DESIGN / PIN-BASE RETROFITS




LINEAR T8 + T5 RETROFITS



	LED-10T8-FCAB24-G4	17W	10W	1450	FLEXCOLOR 3000K/3500K/ 4000K 5000K/6500K	G13	24.0" x 1.0"	
	LED-11T8-FCAB36-G4	25W	11W	1650			36.0" x 1.0"	
	LED-12T8-FCAB48-G4	32W	12W	1800			48.0" x 1.0"	
	LED-15T8-FCAB48-G4		15W	2200				

DEFAULT CCT FOR FLEXCOLOR IS SHOWN IN BOLD.



OPTIONAL EMERGENCY BATTERY BACKUP (SOLD SEPARATELY)

T8 BALLAST BYPASS TYPE B							
LED-9T8-840DE24-G3	17W	9W	1150	4000K	G13	24.0" x 1.0"	
LED-12T8-840DE36-G3	25W	12W	1450			36.0" x 1.0"	
LED-12T8-840DE48-G3	32W		1800			48.0" x 1.0"	
LED-42T8-FC-96-G5	86W	42W	5000	FLEXCOLOR 3000K/3500K/ 4000K 5000K/6500K	FA8	93.0" x 1.0"	





T5 BALLAST COMPATIBLE + BALLAST BYPASS TYPE A+B							
RP-TOTALTUBE-T5-2FT-835-G4	24W	12W	1350	3500K	G5 MINI BI-PIN	24.0" x 1.0"	
RP-TOTALTUBE-T5-2FT-840-G4			1500	4000K			
RP-TOTALTUBE-T5-2FT-850-G4				5000K			
RP-TOTALTUBE-T5-3FT-835-G4	39W	18W	2025	3500K	G5 MINI BI-PIN	36.0" x 1.0"	
RP-TOTALTUBE-T5-3FT-840-G4			2250	4000K			
RP-TOTALTUBE-T5-3FT-850-G4				5000K			
RP-TOTALTUBE-T5-4FT-835-G4	54W	24W	3200	3500K	G5 MINI BI-PIN	48.0" x 1.0"	
RP-TOTALTUBE-T5-4FT-840-G4			3500	4000K			
RP-TOTALTUBE-T5-4FT-850-G4				5000K			

ENERGY SAVING REPLACEMENTS FOR FLUORESCENT T8, T5 AND U-BEND LAMPS. Every size and installation method you need — in the highest quality, best light output design. Install our retrofits to get worry-free operation for years to come.



LED-10T8-FCA

ENERGY SAVING REPLACEMENTS FOR ANY FACILITY



* T8 (TYPE B) AND T5 (TYPE A+B) MODELS ALSO WORK ON 208V & 240V.





WORK LIGHTS



4 MODELS REPLACING UP TO 400W HID. Super bright and durable, our LED work site lights reduce costs and labor with integrated power cord and daisy-chain feature. Several wattages and connection options to choose from will make lighting any work site easier than ever.

PART #	VOLTAGE	PWR CORD	DAISY-CHAIN	REPLACES	WATTAGE	LUMENS	CCT	DIMENSIONS	LISTINGS
TEMPORARY WORK SITE LIGHTS									
 LED-9006-50K	120V	20 FT POWER CORD	UP TO 10 LIGHTS	250W HID	60W	6600	5000K	6.2" x 10.7"	
 LED-9010-50K	120V	35 FT POWER CORD	UP TO 6 LIGHTS	400W HID	100W	11000		6.2" x 12.2"	
LED-9011-50K-G2	120V	35 FT POWER CORD	UP TO 10 LIGHTS						
HIGH BAY WORK SITE LIGHTS BALLAST BYPASS TYPE B									
LED-9210-50K-G2	120-277V*	6 FT POWER CORD W/ STRIPPED LEADS	NA	400W HID	100W	12000	5000K	6.5" x 12.7"	
* UL LISTED FOR 120-277VAC. ALSO WORKS ON 208V & 240V.									
TEMPORARY WORK SITE STRING LIGHTS									
 LED-9003-50K-10PK-163-G3	120V	100 FT STRING	UP TO 5 STRINGS	900W INC	120W (10 X 12W)	15000/STRING	5000K	4.4" x 3.1"	
 LED-9003-50K-10PK-182-G3			UP TO 4 STRINGS		130W (10 X 13W)	16000/STRING			



← LED-9010

35 FT POWER CORD



↑ LED-9003-182

CONNECT UP TO 4 STRINGS / 400 FT



OPERATING TEMP

-40°F TO 104°F
9003

-40°F TO 122°F
9006 / 9010
9011 / 9210

MODELS

INGRESS PROTECTION

IP65 RATED
9003

IP64 RATED
9006 / 9010
9011 / 9210

MODELS







CORPORATE HQ & TRAINING CENTER • CARY, IL | INNOVATION & MANUFACTURING CENTER • Middleton, MA
847.380.3540 • led-llc.com • sales@led-llc.com