
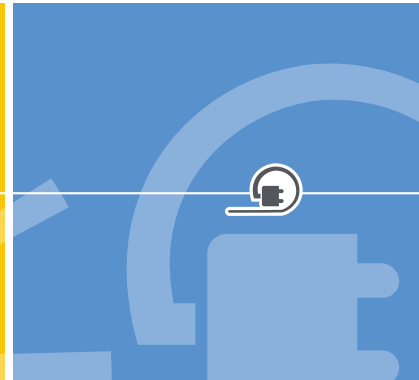
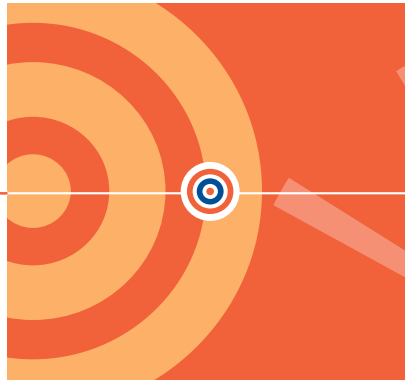


 **Light Efficient Design**



RemPhos

Solera 

breezeV



LIGHT EFFICIENT DESIGN

SCREW-IN RETROFITS

- 6 SHOE BOX + WALL PACK
- 8 BOLLARD + POST TOP
- 10 BOLLARD + POST TOP [FROSTED]
- 12 HIGH BAY + LOW BAY
- 14 SOX + HAZARDOUS LOCATION
- 16 RECESSED CAN

PIN-BASE RETROFITS

- 16 PAR56
- 18 PL
- 22 LINEAR T8 + T5 RETROFITS

WORK LIGHTS

- 26 WORK SITE + STRING LIGHTS



REMPHOS

FIXTURES + RETROFIT KITS

- 30 LINEAR BARKITS [INTERNAL DRIVER]
- 32 LINEAR BARKITS [EXTERNAL DRIVER]
- 34 TROFFER TRANSFORMERS

FIXTURES

- 36 WALL PACKS
- 38 LINEAR STRIP + STAIRWELL + VANITY
- 40 WALL + CEILING + HIGH BAY FIXTURES

RETROFIT KITS

- 42 WALL + CEILING + BLOCK RETROFIT KITS



SOLERA SOLAR

- 46 AREA LIGHTS
- 48 POST TOP + BOLLARD + MULTIFUNCTIONAL LIGHTS
- 50 DISPLAY + FLOOD LIGHTS
- 52 WALL PACK + STEP LIGHTS



breezEV

- 56 ELECTRIC VEHICLE CHARGERS



RESOURCES

- 62 SALES + MARKETING MATERIALS
- 64 WHO'S YOUR REP?



Light Efficient Design



SCREW-IN
RETROFITS



PIN-BASE
RETROFITS



WORK
LIGHTS

LEADING THRU INNOVATION

120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
SHOE BOX + WALL PACK BALLAST BYPASS TYPE B								
LED-8086E30-G4		70W	20W	2800	3000K	E26	2.6" X 5.2"	cUL US LISTED
LED-8086E40-G4	LED-8086E40C-G4			2800	4000K			
LED-8086E50-G4	LED-8086E50C-G4			2880	5000K			
LED-8087E345D-G4	LED-8087E345CD-G4	100W	30W	3500/ 4200 /4300	FLEXCOLOR 3000K/ 4000K /5000K	E26	3.0" X 6.4"	cUL US LISTED
LED-8087M345D-G4	LED-8087M345CD-G4					EX39	3.0" X 6.9"	cUL US LISTED cUL CLASSIFIED US
LED-8088E345D-G4	LED-8088E345CD-G4	175W	50W	6400/ 6900 /7200		E26	3.8" X 7.9"	cUL US LISTED
LED-8088M345D-G4	LED-8088M345CD-G4					EX39	3.8" X 8.5"	cUL US LISTED cUL CLASSIFIED US
LED-8089M345D-G4	LED-8089M345CD-G4	250W	80W	10600/ 10700 /10800			4.3" X 10.0"	
LED-8090M345D-G4		400W	110W	14500/ 15400 /15700			4.3" X 11.4"	
HV LED-8090M345D-G4-HV								
LED-8089M30-G5		250W	80W	10670	3000K	EX39	4.3" X 8.3"	cUL US LISTED cUL CLASSIFIED US
LED-8089M40-G5				10760	4000K			
LED-8089M50-G5				10850	5000K			
LED-8091M40D		1000W	320W	43380	4000K	EX39	9.0" X 12.7" (PANEL) 4.7" X 11.2" (DRIVER)	cUL US LISTED cUL CLASSIFIED US
LED-8091M50D				44610	5000K			
HV LED-8091M40D-HV		1000W	320W	43380	4000K			
HV LED-8091M50D-HV				44610	5000K			

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD.

**smaller –
because size
does matter**

ED17 **OURS** LED-8086 GENERIC 20W

5.3" 7.1"

OURS

ED28 LED-8089-G5 GENERIC 80W

8.3" 8.8"

flexCOLOR
SWITCH between 3 COLOR TEMPS

SHOE BOX + WALL PACK



7 MODELS REPLACING UP TO 1000W HID. Retrofit almost any shoe box or wall pack fixture to energy & maintenance saving LED technology. Eliminates ballast failures. FlexColor on several models allows for less stocked inventory as well as field adjustability. Larger models include support feet to prevent socket sag.

**LED PANEL
ADHERES TO
FITTURE LENS**



← - FLEXCOLOR

← - ROTATABLE
BASES —
TO DIRECT LUMENS
OUT OF FIXTURE



LED-8091 ↗

← LED-8088



120/
277V

*



ACTIVE COOLING



CRI



ENCLOSED FIXTURES



-40°F TO 122°F

OPERATING TEMP



DAMP
LOCATION

ENVIRONMENT



L70

50,000hrs
RATED LIFE

* ALSO WORKS ON 208V & 240V.

120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
BOLLARD + POST TOP BALLAST BYPASS TYPE B								
LED-8029E345-A-FW	LED-8029E345C-A-FW	70W/100W/150W	FLEXWATT 12W/ 18W /24W	1550-3360	FLEXCOLOR 3000K/ 4000K /5000K	E26	3.0" x 6.6"	
LED-8029M345-A-FW	LED-8029M345C-A-FW					EX39	3.0" x 6.9"	
LED-8024E345-G7-FW	LED-8024E345C-G7-FW	175W/250W/320W	FLEXWATT 35W/ 45W /60W	5140-8870		E26	3.4" x 7.4"	
LED-8024M345-G7-FW	LED-8024M345C-G7-FW					EX39	3.4" x 7.8"	
LED-8027M345-G7-FW	LED-8027M345C-G7-FW	320W/400W	FLEXWATT 80W/ 100W /110W	11370-15730		EX39	3.8" x 9.5"	
HV LED-8027M345-G7-FW-HV*								
LED-8037E345-A	LED-8037E345C-A	50W	11W	1550/ 1610 /1650	FLEXCOLOR 3000K/ 4000K /5000K	E26	2.6" x 5.3"	
LED-8038E345-A	LED-8038E345C-A	70W	14W	1850/ 1950 /1990		E26	2.6" x 5.3"	
LED-8039E345D-A	LED-8039E345C-A	100W	18W	2450/ 2560 /2610		E26	2.6" x 6.3"	
LED-8039M345D-A	LED-8039M345C-A	100W	18W	2450/ 2560 /2610		EX39	2.6" x 7.0"	
LED-8033E30D-G7		175W	35W	5140	3000K	E26	3.4" x 7.2"	
LED-8033E40D-G7				5290	4000K			
LED-8033E50D-G7				5360	5000K			
LED-8033M30D-G7				5140	3000K	EX39	3.4" x 7.8"	
LED-8033M40D-G7				5290	4000K			
LED-8033M50D-G7				5360	5000K			

DEFAULT WATTAGE AND CCT FOR SUPERFLEX LAMPS ARE SHOWN IN BOLD.

SUPERflex SWITCH BETWEEN COLOR TEMPS & WATTS

flexCOLOR SWITCH BETWEEN 3 COLOR TEMPS

SURGE ARRESTORS

PART #	DESCRIPTION	ENCLOSURE	NOM DIS CURRENT	STRIKE RATING	DIMENSIONS
SPD-277P-10KA-EC-1	10kA SURGE ARRESTOR, 120-277V, SERIES W/ THERMAL FUSE	ROUND IP65	10,000A	1@10kA, 2@6.5kA 15@3kA, 110@1.5kA	2.5" x 1.4"
SPD-347P-10KA	10kA SURGE ARRESTOR, 120-347V, SERIES W/ THERMAL FUSE	ROUND IP67			

STEP DOWN TRANSFORMERS

PART #	DESCRIPTION	MAX WATTAGE	NOM DISCHARGE CURRENT	THD	POWER FACTOR	DIMENSIONS
MTM04506224C-LW	450VA STEPDOWN TRANSFORMER	400W	480/347V IN / 277V OUT	3.4% / 3.8%	0.99	4.2" x 2.7" x 2.2"
MTM01606224C-LW	160VA STEPDOWN TRANSFORMER	140W		4.3% / 4.1%	0.99	4.2" x 2.0" x 1.6"
MTM00506224C-LW	50VA STEPDOWN TRANSFORMER	45W	480/347V IN / 240V OUT	6.2% / 6.7%	0.98 / 0.97	3.0" x 1.7" x 1.4"



BOLLARD + POST TOP



7 MODELS REPLACING UP TO 400W HID. Keep the look and feel of your HID post top and bollard fixtures, while saving energy and maintenance costs. Several models feature FlexWATT and FlexCOLOR allowing for substantial sku reduction and in-field adjustability. Our retrofits are small in size so they fit in almost any fixture.



FLEXCOLOR →



← **LED-8038**



← **SUPERFLEX** —
FLEXIBILITY OF 9 LAMPS in 1

← **LED-8024**



5
YEAR
WARRANTY



**120/
277V**

*



**ACTIVE
COOLING****



CRI



ENCLOSED FIXTURES



-40°F TO 122°F

OPERATING TEMP



**DAMP
LOCATION**

ENVIRONMENT



L70

**50,000hrs
RATED LIFE**

* ALSO WORKS ON 208V & 240V. ** EXCLUDES 8037-39 MODELS.



120-277V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
BOLLARD + POST TOP BALLAST BYPASS TYPE B							
LED-8015E30-G2	100W INC	14W	1792	3000K	E26	2.6" x 5.3"	
LED-8015E40-G2			1918	4000K			
LED-8015E50-G2			1960	5000K			
LED-8017E30-G2-DIM*	150W INC	20W	2540	3000K	E26	2.6" x 5.3"	
LED-8017E40-G2-DIM*			2720	4000K			
LED-8017E50-G2-DIM*			2760	5000K			
LED-8017E345-G3	150W INC	20W	2400/ 2700 /2600	FLEXCOLOR 3000K/ 4000K /5000K	E26	2.8" x 5.5"	
LED-8018E345-G3	200W INC	25W	3000/ 3375 /3250		E26	2.8" x 5.5"	
LED-8019E345-G3	300W INC	35W	4200/ 4725 /4550		E26	3.4" x 6.8"	
LED-8019M345-G3	175W HID		4200/ 4725 /4550		EX39	3.4" x 7.1"	
LED-8020M345-G3	250W HID	45W	5400/ 6075 /5850		EX39	3.9" x 7.9"	
LED-8021M345-G3	320W HID	65W	7800/ 8775 /8450		EX39	4.7" x 9.2"	
LED-8065E40-F	175W HID	35W	5000		4000K	E26	3.5" x 8.8"
LED-8065M40-F				EX39		3.5" x 9.5"	

DEFAULT LUMENS AND CCT FOR FLEXCOLOR LAMPS ARE SHOWN IN BOLD.

* LED-8017-G2-DIM IS 120V ONLY. DIMMABLE ON MOST 120V LED RATED DIMMERS, PLEASE SEE WEBSITE FOR LIST OF COMPATIBLE DIMMERS.

BOLLARD + POST TOP [FROSTED]



8 MODELS REPLACING UP TO 320W HID / 300W INC. Perfect for post top and bollard fixtures, these retrofits feature frosted lenses and shapes that closely mimic the outgoing lamp technology. Because of their traditional shapes, several feature Energy Star.



flexCOLOR
SWITCH between
3 COLOR TEMPS

SHAPE, SIZE &
LIGHT DELIVERY OF
TRADITIONAL HID LAMPS ->



LED-8018 →



← LED-8065



*



**



BALLAST BYPASS



CRI



ENCLOSED FIXTURES



-40°F TO 113°F
8015 / 8017 / 8018
8019 8020 / 2021






















-4°F TO 113°F
8065



50,000hrs
RATED LIFE

* 8065 MODELS HAVE A 3 YEAR WARRANTY. ** ALSO WORKS ON 208V & 240V. LED-8017-G2-DIM IS 120V ONLY. *** RATED LIFE IS 25,000HRS FOR 8065 MODELS.

120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
HIGH BAY BALLAST BYPASS TYPE B								
LED-8136M40D	LED-8136M40CD	250W	90W	12400	4000K	EX39	8.7" X 9.3"	 
LED-8136M50D	LED-8136M50CD			12900	5000K			
LED-8132M40D	LED-8132M40CD	400W	135W	18600	4000K	EX39	8.7" X 10"	
LED-8132M50D	LED-8132M50CD			19200	5000K			
 LED-8130M40D	LED-8130M40CD	400W	150W	20900	4000K	EX39	8.7" X 10"	
 LED-8130M50D	LED-8130M50CD			21200	5000K			
HIGH BAY BALLAST COMPATIBLE TYPE A								
LED-8236M345D	LED-8236M345CD	250W	95W	13700/14400/14600	FLEXCOLOR 3000K/4000K/5000K	EX39	8.7" X 9.7"	 
LED-8232M345D		400W	140W	19900/20900/21100		EX39	8.7" X 10.5"	
 LED-8232M345D-HV						EX39	10.3" X 12.5"	
LED-8242M40D		1000W	270W	38400	4000K	EX39	10.3" X 12.5"	
LED-8242M50D				38700	5000K			
 LED-8242M40D-HV				38400	4000K	EX39		
 LED-8242M50D-HV				38700	5000K			
HIGH BAY BALLAST COMPATIBLE TYPE A								
 LED-8030M40-MHBC		400W	140W	18619	4000K	EX39	9.1" X 9.2"	 
 LED-8030M57-MHBC				17047				
LOW BAY BALLAST BYPASS TYPE B								
LED-8056E40D-A		175W	45W	5334	4000K	E26	5.7" X 6.9"	
LED-8056E50D-A				5560	5000K			
LED-8056M40D-A				5334	4000K	EX39		
LED-8056M50D-A				5560	5000K			
 LED-8035E40-A		175W	60W	6684	4000K	E26	5.7" X 7.4"	
 LED-8035E57-A				7062	5700K			
LED-8057M40D-A		250W	75W	9607	4000K	EX39	5.7" X 8.8"	 
LED-8057M50D-A				9236	5000K			



HIGH BAY + LOW BAY



10 MODELS REPLACING UP TO 1000W HID. Ultra-bright LED retrofits for high ceiling environments. Models w/o active cooling for open fixtures & silent operation. Models w/ active cooling are safe to install in enclosed fixtures. Low bay retrofits are ideal for ceilings fixtures that require light to be pushed down & out. Angled LED panels help direct light exactly where it is needed.



← **POWERFUL PERFORMANCE
FOR HIGH BAY ENVIRONMENTS**

← LED-8236-345

LED-8056 ↗



* EXCLUDES 8030 AND 8035 MODELS. ** EXCLUDES 8100 MODELS.

LIGHT EFFICIENT DESIGN / SCREW-IN RETROFITS



120-277V PART #	347V PART #	REPLACES	WATTAGE		LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
SOX BALLAST BYPASS TYPE B									
LED-8100-22K		35W	20W		2030	2200K	B22D	12.2" X 2.8"	
LED-8100-40K					3022	4000K		16.7" X 2.87"	
LED-8101-22K		55W	35W		3232	2200K		20.5" X 2.8"	
LED-8101-40K					5156	4000K		43.5" X 2.8"	
LED-8102-22K		90W	60W		5769	2200K		12.2" X 2.8"	
LED-8102-40K					8198	4000K		16.7" X 2.8"	
LED-8104-22K		180W	100W		11576	2200K		20.5" X 2.8"	
LED-8104-40K					11576	4000K		43.5" X 2.8"	
LED-8100-AMB		35W	20W		NA	AMBER		12.2" X 2.8"	
LED-8101-AMB		55W	35W					16.7" X 2.8"	
LED-8102-AMB		90W	60W					20.5" X 2.8"	
LED-8104-AMB		180W	100W					43.5" X 2.8"	

HAZARDOUS LOCATION | BALLAST BYPASS | TYPE B

LED-8929E57-HAZ	LED-8929E57C-HAZ	150W	24W		3425	5700K	E26	3.0" X 6.6"	
LED-8929M57-HAZ	LED-8929M57C-HAZ						EX39	3.0" X 6.9"	
LED-8924E50-HAZ	LED-8924E50C-HAZ	250W	49W (347V)	45W (120/277V)	6620	5000K	E26	3.4" X 7.8"	
LED-8924M50-HAZ	LED-8924M50C-HAZ						EX39	3.4" X 7.8"	

DEFAULT WATTAGE AND CCT FOR SUPERFLEX LAMPS ARE SHOWN IN BOLD.



ENCLOSED FIXTURES



LISTED FOR CLASS 1, DIV 2 HAZ LOCATIONS (SEE OUR WEBSITE FOR A LIST OF APPROVED FIXTURE)



SUPPORT HARNESS INCLUDED TO ELIMINATE SOCKET SAG

SOX + HAZARDOUS LOCATION



THE MOST UNIQUE RETROFITS, BROUGHT TO YOU BY THE LEADER! Hazardous location fixtures are expensive, retrofitting them w/ UL approved lamps is NOT. Two wattages to choose from. SOX retrofits in 4 lengths to adequately fill out the long, narrow fixtures.



UL CERTIFIED
FOR HAZARDOUS
LOCATION —
↓ CLASS 1 Div 2

← 4 LENGTH OPTIONS TO
FILL THE ENTIRE FIXTURE

← LED-8101

← LED-8924



*



BALLAST BYPASS



CRI



ACTIVE COOLING



SOX












HAZARDOUS





50,000hrs
RATED LIFE

* ALSO WORKS ON 208V & 240V.

120-277V PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BEAM ANGLE	BASE	DIMENSIONS	LISTINGS		
RECESSED CAN BALLAST BYPASS TYPE B											
LED-8054E27-G2		150W INC 100W HID	30W	2500	2700K	140°	E26	4.2" X 4.8"	 		
LED-8054E35-G2				3000	3500K						
LED-8054E40-G2				3000	4000K						
LED-8054E50-G2				3000	5000K						
 LED-8054E35-G2-DIM*		150W INC 100W HID	30W	3000	3500K		E26		 		
 LED-8054E40-G2-DIM*				3000	4000K						
 LED-8054E50-G2-DIM*				3000	5000K						
LED-8045M42		LED-8045M42C	175W HID	50W HID	4341		4200K		E39	4.5" X 7.8"	 
LED-8045M50		LED-8045M50C			4886		5000K				

* LED-8054-G2-DIM ARE 120V ONLY. DIMMABLE ON MOST 120V LED RATED DIMMERS, PLEASE SEE WEBSITE FOR LIST OF COMPATIBLE DIMMERS.



120 PART #	347V PART #	REPLACES	WATTAGE	LUMENS	COLOR	BEAM ANGLE	BASE	DIMENSIONS	LISTINGS
PAR 56 RETROFIT LAMPS BALLAST BYPASS TYPE B									
LED-7356-SP30**		300W HALOGEN	40W	3500	3000K	15°	GX16d	7.0" X 5.0"	 
LED-7356-SP40**					4000K				
LED-7356-SP50**					5000K				
LED-7356-NF30**					3000K	25°			
LED-7356-NF40**					4000K				
LED-7356-NF50**					5000K				
LED-7356-FL30**					3000K	40°			
LED-7356-FL40**					4000K				
LED-7356-FL50**					5000K				

** LED-7356 ARE 120V ONLY. DIMMABLE ON MOST 120V LED RATED DIMMERS, PLEASE SEE WEBSITE FOR LIST OF COMPATIBLE DIMMERS.

RECESSED CAN



+ PAR 56



4 MODELS REPLACING 100W HID/150W INC & 300W HALOGEN. Recessed can & PAR 56 fixtures are one of the most common ways to light any commercial space, we have you covered with both screw-in and pin-base options. Our dimmable models will help save even more energy and make interior spaces more appealing.



← FOR ULTRA-HIGH CEILINGS



QUICK & EASY
ENERGY SAVINGS

← LED-8045

↑ LED-8054

← LED-7356



120/
277V

*



RECESSED CAN



PAR RETROFITS



7356



8054



8045



50,000hrs
RATED LIFE

* DIMMABLE OPTIONS ARE 120V ONLY.

2
PIN

TYPE A/B PL LAMPS



5W | LED-7300
REPLACES 9W
GX23

TYPE B PL LAMPS



7W | LED-7310-G3
REPLACES 32W
G24d
[GX24q/4 PIN]

MOUNTING



TYPE A/B PL LAMPS

4
PIN

TYPE A PL LAMPS



10W | LED-7330
REPLACES 26W
G24q/GX24q

TYPE B PL LAMPS



7W | LED-7310-G3
REPLACES 32W

G24q
[G24d/2 PIN]



23W | LED-7340
REPLACES 42W

2G11



7W | LED-7311-G3
REPLACES 13W
G23-2



7W | LED-7312-G3
REPLACES 13W
GX23-2



7W | LED-7322-G3
REPLACES 26W
G24d



10W | LED-7320-G3
REPLACES 42W
G24q/GX24q



11W | LED-7324-G3
REPLACES 42W
G24q/GX24q



11W | LED-7334-G3
REPLACES 26W
G24q/GX24q



12W | LED-7318
REPLACES 26W
G24q/GX24q



12W | LED-7338
REPLACES 26W
G24q/GX24q



25W | LED-7342
REPLACES 42W
G24q/GX24q



SAFE FOR ENCLOSED FIXTURES



OMNI-DIRECTIONAL



VERTICAL



HORIZONTAL



OVER A DOZEN MODELS FOR THE PERFECT SOLUTION. Our latest pin-based LED retrofits are perfect for PL applications, and provide a long-lasting LED alternative for recessed areas in offices, hotels, lobbies, schools, etc. TYPE A/B, A and B to choose from, in several shapes.



**HIGHEST QUALITY PIN-BASED
RETROFITS FOR ANY APPLICATION**

← LED-7320



120/
277V



CRI

-40°F TO 104°F
7300-10-11-12-18-20
7322-24-30-34-38

-4°F TO 105°F
7342















-40°F TO 122°F
7340





















50,000hrs
RATED LIFE

OPERATING TEMP

* ALSO WORKS ON 208V & 240V.


PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	MOUNTING	DIMENSIONS	LISTINGS
PL UNIVERSAL TYPE A/B								
LED-7300-27K-G2	9W 2-PIN	5W	550	2700K	GX23		5.5" X 1.4"	
LED-7300-35K-G2				3500K				
LED-7300-40K-G2				4000K				
LED-7300-50K-G2				5000K				
LED-7311-27K-G3	13W 2-PIN	7W	840	2700K	G23-2		5.9" X 1.3"	
LED-7311-35K-G3			880	3500K				
LED-7311-40K-G3			910	4000K				
LED-7311-50K-G3			920	5000K				
LED-7312-27K-G3	13W 2-PIN	7W	820	2700K	GX23-2		5.9" X 1.3"	
LED-7312-35K-G3			870	3500K				
LED-7312-40K-G3			880	4000K				
LED-7312-50K-G3			910	5000K				
LED-7318-27A	26W 4-PIN CFL	12W	837	2700K	G24q/GX24q*		3.8" X 3.0"	
LED-7318-35A			1157	3500K				
LED-7318-40A			1198	4000K				
LED-7322-27K-G3	26W 2-PIN	7W	820	2700K	G24d/G24q		5.7" X 1.3"	
LED-7322-35K-G3			870	3500K				
LED-7322-40K-G3			900	4000K				
LED-7322-50K-G3			930	5000K				
LED-7320-27K-G3	42W 4-PIN CFL	10W	1350	2700K	G24q/GX24q		6.9" X 1.3"	
LED-7320-35K-G3			1550	3500K				
LED-7320-40K-G3			1600	4000K				
LED-7320-50K-G3			1635	5000K				
LED-7324-27K-G3	42W 4-PIN CFL	11W	1050	2700K	G24q/GX24q		5.6" X 1.3"	
LED-7324-35K-G3			1125	3500K				
LED-7324-40K-G3			1200	4000K				
LED-7324-50K-G3			1200	5000K				

* G24q BASE CAN BE USED ONLY w/LED-7318 IF BYPASSING THE BALLAST.


PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	MOUNTING	DIMENSIONS	LISTINGS	
PL BALLAST COMPATIBLE TYPE A									
LED-7330-27K-G2	26W 4-PIN CFL	10W	760	2700K	 G24q/GX24q		6.8" X 1.3"		
LED-7330-35K-G2			850	3500K					
LED-7330-40K-G2			916	4000K					
LED-7334-27K-G3	32W 4-PIN CFL	12W	1100	2700K	 G24q/GX24q		5.8" X 1.4"		
LED-7334-35K-G3				3500K					
LED-7334-40K-G3				4000K					
LED-7338-27A	26W 4-PIN CFL	12W	1100	2700K	 G24q/GX24q		3.0" X 3.8"		
LED-7338-35A				3500K					
LED-7338-40A				4000K					
PL + PLL BALLAST BYPASS TYPE B									
LED-7310-27K-G3	32W 2-PIN or 4-PIN CFL	7W	890	2700K	 G24d/G24q		5.5" X 1.4"		
LED-7310-35K-G3			949	3500K					
LED-7310-40K-G3			970	4000K					
LED-7310-50K-G3			990	5000K					
LED-7340-30K-G2	40W 4-PIN CFL	17W	2100	3000K	 2G11		22" X 1.5"		
LED-7340-35K-G2				3500K					
LED-7340-40K-G2				2200					4000K
LED-7340-50K-G2				5000K					
LED-7342-27K-G2	42W 4-PIN CFL	25W	2500	2000	 G24q/GX24q		4.2" X 3.7"		
LED-7342-35K-G2				3500K					
LED-7342-40K-G2				4000K					

uniFORM iLLUMiNatiON, FROSTED LENS & MORE...

TOTALTUBE T8 MODELS INCLUDE
G3 SMARTSENSE-TLED
INTELLIGENT SAFETY SYSTEM



U-BEND
MODELS
available



DOUBLE ENDED POWER



EASY INSTALL

8' 2-PIECE T8 ↗

available in STANDARD LENGTHS INCLUDING 8'



LINEAR T8 + T5 RETROFITS



ENERGY SAVING REPLACEMENTS FOR FLUORESCENT T8, T5 AND U-BEND LAMPS. Every size and installation method you need — in the highest quality, best light output design. Install our retrofits for worry-free operation for years to come.



**energy saving
REPLACEMENTS FOR ANY FACILITY**



120/
277V



CRI



DOUBLE-ENDED
POWER



BALLAST BYPASS OR
BALLAST COMPATIBLE



-22°F TO 104°F
OPERATING TEMP



100,000hrs
RATED LIFE

TOTALTUBE



BALLAST
BYPASS












-40°F TO 113°F
OPERATING TEMP










50,000hrs
RATED LIFE

LED-T8

LIGHT EFFICIENT DESIGN / PIN-BASE RETROFITS

PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
T5 + T8 BALLAST COMPATIBLE TYPE A + B							
RP-TOTALTUBE-T5-2FT-835-G4	24W	12W	1350	3500K	G5 MINI BI-PIN	24.0" x 1.0"	
RP-TOTALTUBE-T5-2FT-840-G4			1500	4000K			
RP-TOTALTUBE-T5-2FT-850-G4			5000K				
RP-TOTALTUBE-T5-3FT-835-G4	39W	18W	2025	3500K	G5 MINI BI-PIN	36.0" x 1.0"	
RP-TOTALTUBE-T5-3FT-840-G4			2250	4000K			
RP-TOTALTUBE-T5-3FT-850-G4			5000K				
RP-TOTALTUBE-T5-4FT-835-G4	54W	24W	3200	3500K	G5 MINI BI-PIN	48.0" x 1.0"	
RP-TOTALTUBE-T5-4FT-840-G4			3500	4000K			
RP-TOTALTUBE-T5-4FT-850-G4			5000K				
RPT-B-TOTALTUBE-T8-G3-2FT-835-A	17W	10W	1350	3500K	G13 BI-PIN	24.0" x 1.0"	
RPT-B-TOTALTUBE-T8-G3-2FT-840-A				4000K			
RPT-B-TOTALTUBE-T8-G3-2FT-850-A				5000K			
RPT-B-TOTALTUBE-T8-G3-3FT-835-A	25W	10W	1350	3500K	G13 BI-PIN	36.0" x 1.0"	
RPT-B-TOTALTUBE-T8-G3-3FT-840-A				4000K			
RPT-B-TOTALTUBE-T8-G3-3FT-850-A				5000K			
RPT-B-TOTALTUBE-T8-G3-4FT-835-A	32W	12W	1620	3500K	G13 BI-PIN	48.0" x 1.0"	
RPT-B-TOTALTUBE-T8-G3-4FT-840-A				4000K			
RPT-B-TOTALTUBE-T8-G3-4FT-850-A				5000K			
RPT-B-TOTALTUBE-T8-G3-4FTHO-835-A	32W	15W	2025	3500K	G13 BI-PIN	48.0" x 1.0"	
RPT-B-TOTALTUBE-T8-G3-4FTHO-840-A				4000K			
RPT-B-TOTALTUBE-T8-G3-4FTHO-850-A				5000K			
RPT-B-TOTALTUBE-T8-G3-2FTU1-835-A	32W	15W	1950	3500K	G13 BI-PIN	24.0" x 2.0"	
RPT-B-TOTALTUBE-T8-G3-2FTU1-840-A				4000K			
RPT-B-TOTALTUBE-T8-G3-2FTU6-835-A	32W	15W	1950	3500K	G13 BI-PIN	24.0" x 6.0"	
RPT-B-TOTALTUBE-T8-G3-2FTU6-840-A				4000K			



PART #	REPLACES	WATTAGE	LUMENS	COLOR	BASE	DIMENSIONS	LISTINGS
T8 BALLAST BYPASS TYPE B							
LED-9T8-835DE24-G3	17W	9W	1100	3500K	G13	24.0" x 1.0"	
LED-9T8-840DE24-G3			1150	4000K			
LED-9T8-850DE24-G3				5000K			
LED-12T8-835DE36-G3	25W	12W	1400	3500K	G13	36.0" x 1.0"	
LED-12T8-840DE36-G3			1450	4000K			
LED-12T8-850DE36-G3				5000K			
LED-12T8-835DE48-G3	32W	12W	1700	3500K	G13	48.0" x 1.0"	
LED-12T8-840DE48-G3			18001800	4000K			
LED-12T8-850DE48-G3				5000K			
LED-15T8-835DE48-G3	32W	15W	2100	3500K	G13	48.0" x 1.0"	
LED-15T8-840DE48-G3			2200	4000K			
LED-15T8-850DE48-G3				5000K			
LED-18T8-840SE48-G3	32W	18W	2200	4000K	G13	48.0" x 1.0"	
LED-18T8-850SE48-G3				5000K			
LED-42T82P-840DE96-G4	54-86W	42W	5040	4000K	FA8	96.0" x 1.0"	
LED-42T82P-850DE96-G4				5000K			
LED-42T82P-840HO96-G4	54-86W	42W		4000K	R17D	96.0" x 1.0"	
LED-42T82P-850HO96-G4				5000K			





PART #	VOLTAGE	PWR CORD	DAISY-CHAIN	REPLACES	WATTAGE	LUMENS	COLOR	DIMENSIONS	LISTINGS
TEMPORARY WORK SITE LIGHTS									
LED-9006-50K	120V	20 FT POWER CORD	UP TO 10 LIGHTS	250W HID	60W	6600	5000K	6.2" X 10.7"	
LED-9010-50K	120V	35 FT POWER CORD	UP TO 6 LIGHTS	400W HID	100W	11000		6.2" X 12.2"	
LED-9015-50K	120V	35 FT POWER CORD	UP TO 4 LIGHTS	600W HID	150W	16500		6.2" X 13.4"	
HIGH BAY WORK SITE LIGHTS BALLAST BYPASS TYPE B									
LED-9210-50K	120-277V*	6 FT POWER CORD W/ STRIPPED LEADS	NA	400W HID	100W	12000	5000K	6.5" X 12.7"	
ECONOMY WORK SITE LIGHTS									
LED-9009-100-5C	120V	10 FT POWER CORD	UP TO 6 LIGHTS	400W HID	100W	12000	5000K	6.5" X 11.3"	
TEMPORARY WORK SITE STRING LIGHTS									
LED-9003-50K-5PK	120V	50 FT STRING	UP TO 10 STRINGS	300W INC	40W (5 X 8W)	5000/STRING	5000K	4.4" X 3.1"	
LED-9003-50K-10PK-163-G2	120V	100 FT STRING	UP TO 5 STRINGS	900W INC	120W (10 X 12W)	15000/STRING			
LED-9003-50K-10PK-182-G2			UP TO 3 STRINGS		120W (10 X 12W)				

* UL LISTED FOR 120-277VAC. ALSO WORKS ON 208V & 240V.

WORK LIGHTS



8 MODELS REPLACING UP TO 600W HID & 900W INC. Super bright and durable, our LED work site lights reduce costs and labor with integrated power cord and daisy-chain feature. Several wattages and connection options to choose from will make lighting any work site easier than ever.



**CONNECT UP TO
5 STRINGS / 500 FT ↓**

↑ LED-9003-163



**→
35 FT
POWER
CORD**

LED-9010 ↑



* 9003 MODELS HAVE A 3 YEAR WARRANTY. ** 9210 IS UL LISTED FOR 120-277VAC, ALL OTHER MODELS ARE 120V. 9210 ALSO WORKS ON 208V & 240V. *** EXCLUDES MODEL 9210. **LIGHT EFFICIENT DESIGN / WORK LIGHTS**

RemPhos



RETROFITS
KITS



FIXTURES

LIGHTING ON TARGET



PART #	WATTAGE	LUMENS	COLOR	DIMENSIONS	LISTINGS
LBI – LINEAR BARKIT INTERNAL DRIVER					
RP-LBI-G1-2F-6W-27K-WC2	FLEXWATT 6W/9W/12W	696-1524	FLEXCOLOR 2700K/3000K/3500K	19.3" x 1.2" x 1.2"	
RP-LBI-G1-2F-6W-40K-WC		780-1560	FLEXCOLOR 3000K/4000K/5000K		
RP-LBI-G1-3F-10W-27K-WC2	FLEXWATT 10W/12W/15W	1270-1980	FLEXCOLOR 2700K/3000K/3500K	31.3" x 1.2" x 1.2"	
RP-LBI-G1-3F-10W-40K-WC		1400-2100	FLEXCOLOR 3000K/4000K/5000K		
RP-LBI-G1-4F-15W-27K-WC2	FLEXWATT 10W/15W/25W	1260-3400	FLEXCOLOR 2700K/3000K/3500K	43.3" x 1.2" x 1.2"	
RP-LBI-G1-4F-15W-40K-WC		1462-3653	FLEXCOLOR 3000K/4000K/5000K		

LBI – ACCESSORIES					
PART #	DESCRIPTION	PART #	DESCRIPTION		
CONNECTORS & CONTROLS			INCOMING POWER KIT		
RP-LBI-LC-XIN-DIM*	LINKING CABLES 	RP-LBI-G1-IP-3F-DIM ONE KIT IS REQUIRED PER CONTINUOUS RUN OF LBI	 INCOMING PWR CABLE / PIGTAIL	 SERVICE DISCONNECT	 GROMMET
RP-LBI-LC-XIN-NO-DIM*					
RP-LBI-SSC-DIM-10P (DIM)	SEAMLESS CONNECTOR 	USED TO HARD WIRE THE INCOMING POWER CABLE INTO FIXTURE OR J-BOX	MOUNTING ACCESSORIES		
RP-LBI-SSC-NODIM-10P (NO-DIM)					
RP-LBI-OC2 (SINGLE PACK)	OC2 SENSOR KIT 	RP-LBI-SMM-10P**	SURFACE MOUNT MAGNETIC CLIP 		
RP-LBI-EMG2-8W-DIM	EMERGENCY DRIVER (EMG-H SERIES) 	RP-LBI-SIL-KIT-10P***	SUSPENDED IN-LINE BRACKET KIT 		
RP-LBI-EMG2-25W-DIM					
RP-LBI-SRC-4.7IN (SINGLE PACK)	4.7 IN SPACER CONNECTOR 	RP-LBI-UDC-10P***	UP DOWN CLIP 		
RP-LBI-JBOX-1.5X4	LBI JUNCTION BOX 	RP-LBI-45DEG	45-DEGREE BRACKET/CLIP 		
RP-LBI-G1-IP-2F-120V-SW	CORD WITH PLUG & ON/OFF SWITCH 	RP-LBI-T1516-10P***	T-BAR CLIP 		
RP-LBI-G1-IP-7F-120V-SW					
RP-LBI-G1-IP-90DEG-12F-DIM	12 FT 90-DEG INCOMING PWR CABLE 	** 2X SURFACE MOUNT MAGNETIC CLIPS INCLUDED WITH EVERY LBI. *** 10 PACK ONLY.			


* X= 6, 12 OR 18 (INCHES). CUSTOM LENGTHS AVAILABLE UPON REQUEST.



LINEAR BARKITS [INTERNAL DRIVER]



ONE LIGHT. UNLIMITED POSSIBILITIES. The LBI (linear barkit internal driver) is easily our most versatile fixture & retrofit. Connect up to 40 together from just one power feed. Dozens of accessories and control options make this the easy choice for almost any lighting need.

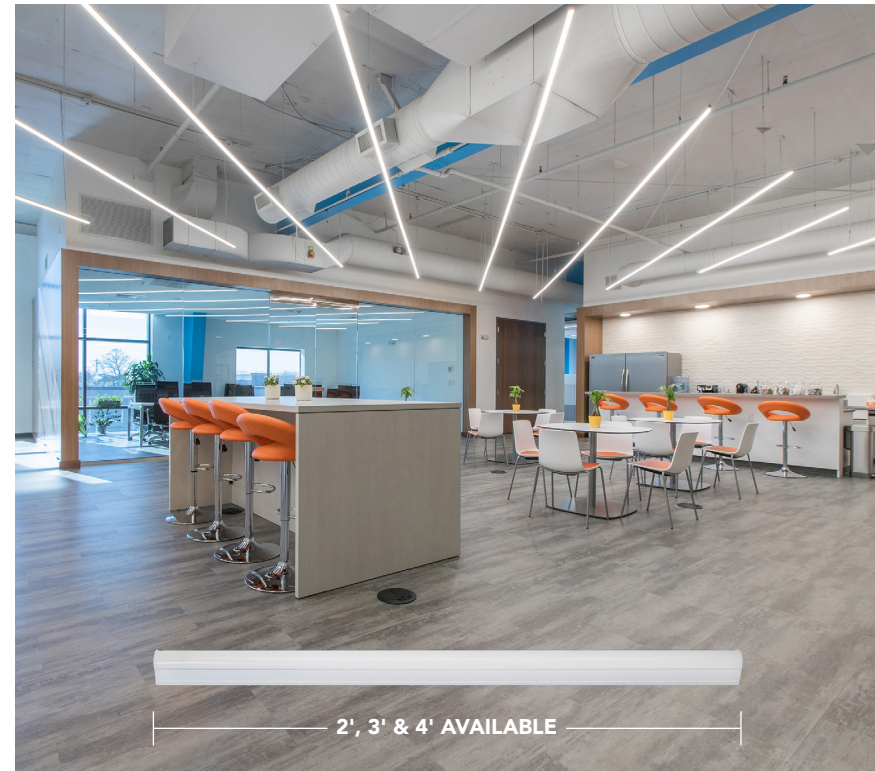

RP-LBI-LINEAR BARKIT INTERNAL DRIVER ↗



*



SENSOR READY



AUX PORT*



OPTIONAL OCC



OPTIONAL EMG BATTERY BACKUP



EFFICACY (LIGHT ENGINE)



CRI



BEAM ANGLE



-13°F TO 140°F

OPERATING TEMP



PWR FACTOR/THD



100,000hrs RATED LIFE

* HIGH VOLTAGE 240-347V AVAILABLE FOR CANADA ONLY.

START BUILDING YOUR LBE...

RP-LBE-G2-[WATTAGE]-[LENGTH]-[#LAMPS]-[8+COLOR]-[DIMMING]-[OPTIONS]

WATTAGE

12W (6-8-10-12) **25W** (15-18-20-25) **45W** (30-35-40-45) **80W** (50-60-70-80)




LENGTH

1FT **2FT** **3FT** **4FT**



OF LAMPS

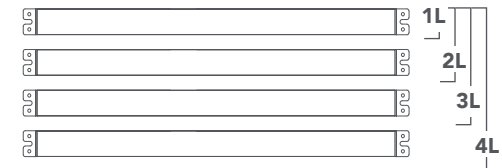

COLOR

30 (3000K) **35** (3500K) **40** (4000K) **50** (5000K)



DIMMING

STANDARD DRIVER



10V
0-10V DIM

OPTIONAL DRIVERS/CONTROLS



LVD
120-277V TRIAC



1 STEP
SINGLE SWITCH



2 STEP
2 SWITCH

OPTIONS



EMG
BATTERY
BACKUP



HV
HIGH
VOLTAGE

MOTION SENSING

OCC
STANDARD

OCCLR
LIMITED
RANGE

OCCRF
SIMPLE
GROUPING



LINEAR BARKITS [EXTERNAL DRIVER]



MAXIMUM VERSATILITY, IN AN EASY TO INSTALL RETROFIT. The LBE (linear barkit external driver) is the “go to” product for large retrofit projects. Each LBE can be customized to different lengths, wattages, colors and control options. Available in 1 FT, 2 FT, 3 FT and 4 FT to fit almost any fixture.



SWITCH BETWEEN
WATTAGES w/ flexWATT

◀ RP-LBE-LINEAR BARKIT EXTERNAL DRIVER



KEEP THE
FIXTURES
YOU LOVE



10
YEAR
WARRANTY



120V | 120V |
277V | 347V



0-10V
DIM TO OFF

SENSOR READY



12V
AUX PORT*

AUX PORT*



OPTIONAL OCC

OPTIONAL OCC



OPTIONAL EMG
BATTERY BACKUP

OPTIONAL EMG
BATTERY BACKUP



1167
LPW

EFFICACY
(LIGHT ENGINE)



120°
BEAM ANGLE

BEAM ANGLE



<15%
THD
>0.9
PWR FACTOR/THD


PWR FACTOR/THD



100,000hrs
RATED LIFE
L70

100,000hrs
RATED LIFE



PART #	WATTAGE	LUMENS	COLOR	DIMENSIONS	LISTINGS
TROFFER TRANSFORMER					
RP-TTV-G1-2X2-20L-840-FWFC	FLEXWATT 16W/20W/24W/28W	2000-3640	FLEXCOLOR 3500K/4000K/5000K	23.7" x 23.7" x 1.6"	
RP-TTV-G1-1X4-25L-840-FWFC	FLEXWATT 16W/20W/24W/28W	1968-3556		11.9" x 47.8" x 1.5"	
RP-TTV-G1-2X4-33L-840-FWFC	FLEXWATT 20W/26W/34W/40W	2540-5300		23.7" x 47.8" x 1.6"	
RP-TTF-G1-2X2-20L-840-FWFC	FLEXWATT 16W/20W/24W/28W	2000-3640		23.7" x 23.7" x 1.7"	
RP-TTF-G1-1X4-25L-840-FWFC	FLEXWATT 16W/20W/24W/28W	1968-3556		11.9" x 47.8" x 1.7"	
RP-TTF-G1-2X4-33L-840-FWFC	FLEXWATT 20W/26W/34W/40W	2540-5300		23.7" x 47.8" x 1.7"	

1 One Piece Design

 **FASTEST INSTALL**

 **FIXTURE & RETROFIT KIT**




SUPERflex SWITCH BETWEEN WATTS & COLOR TEMPS

flexCONTROL ORDER w/ advanced, basic OR NO CONTROLS



TROFFER TRANSFORMERS



FASTEST INSTALLATION MEANS SAVING MONEY. The Troffer Transformer is only one piece, making it 2x faster to install than the competition. Packed with flex features and available in flat panel or volumetric design, the Troffer Transformer is available in all the standard sizes.

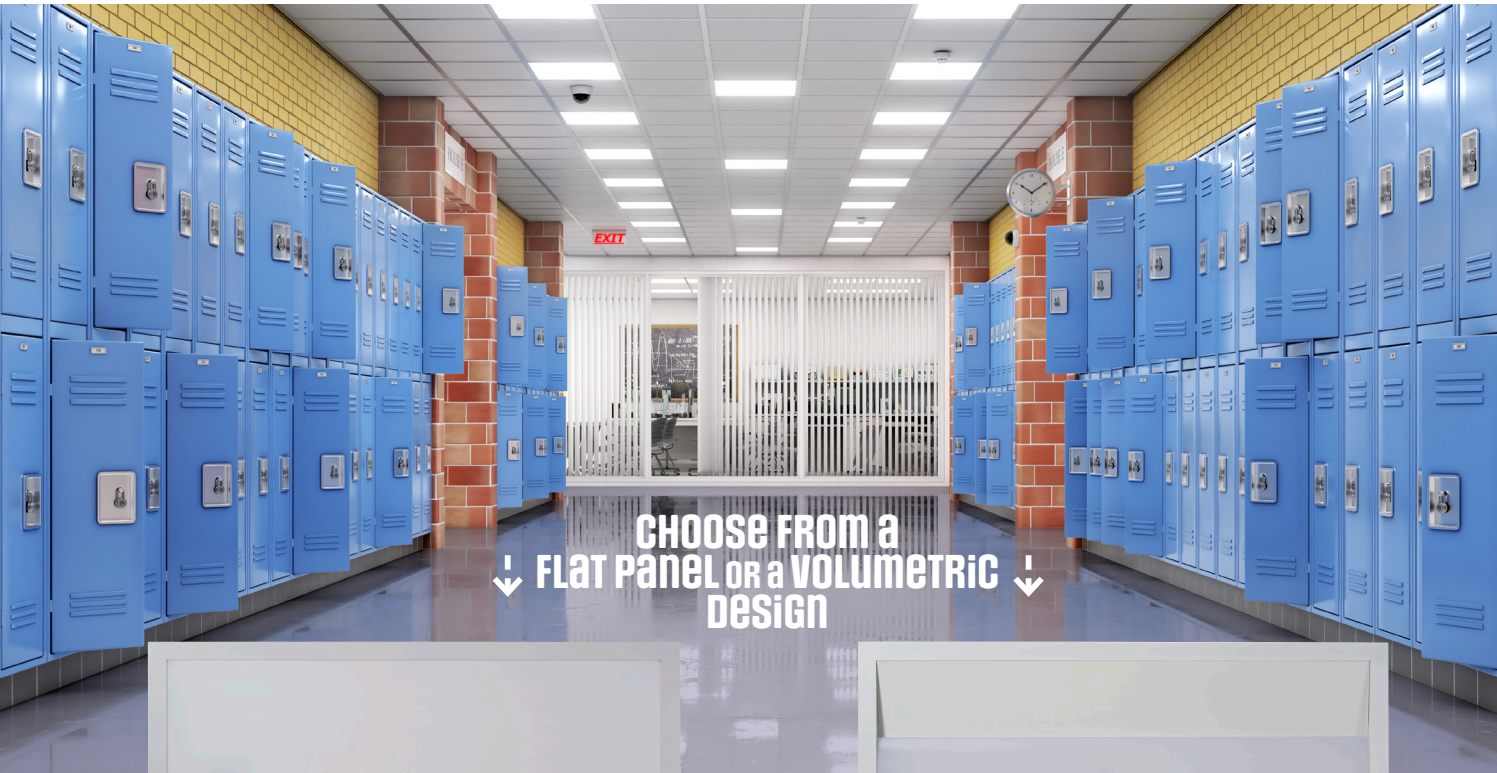

CHOOSE FROM a
 ↓ FLAT PANEL OR a VOLUMETRIC ↓
 DESIGN

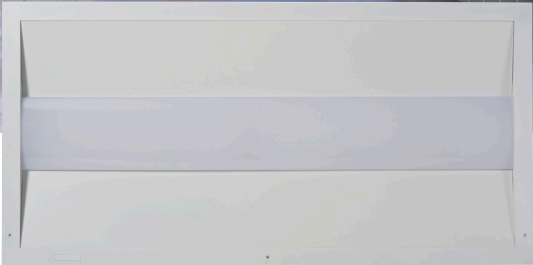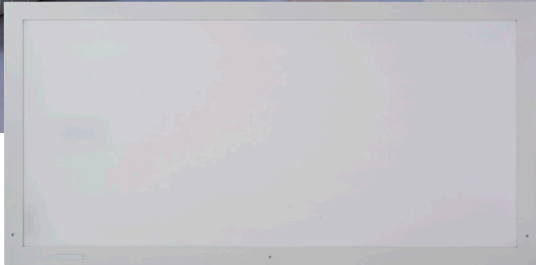

← RP-TTF
 (FLAT PANEL)

RP-TTV →
 (VOLUMETRIC)



*



DIMMING



OPTIONAL OCC



OPTIONAL EMG
 BATTERY BACKUP



CRI



BEAM ANGLE



-40°F TO 122°F

OPERATING TEMP



100,000hrs
 RATED LIFE

* ALSO WORKS ON 208V & 240V.



PART #	REPLACES	WATTAGE	LUMENS	COLOR	DIMENSIONS	LISTINGS
MINI WALL PACK FLEXWATT FLEXCOLOR						
↔ RP-B-WPM-30L-FWFC	100W	FLEXWATT 15W/20W/25W	1800-3000	FLEXCOLOR 3000K/4000K/5000K	5.8" x 8.1" x 3.1"	
ADJUSTABLE WALL PACK FLEXWATT FLEXCOLOR						
RP-B-WPA-30L-FWFC	175W	FLEXWATT 15W/20W/25W	2000-3330	FLEXCOLOR 3000K/4000K/5000K	6.5" x 8.1" x 4.0"	
CUT-OFF WALL PACK FLEXCOLOR						
RP-B-WPC-48L-FC	175W	40W	4800	FLEXCOLOR 3000K/4000K/5000K	12.6" x 6.9" x 5.1"	
RP-B-WPC-72L-FC	250W	60W	7200			
RP-B-WPC-96L-FC	320W	80W	9600			
TRADITIONAL WALL PACK FLEXCOLOR						
RP-B-WPT-78L-FC	175W	60W	7800	FLEXCOLOR 3000K/4000K/5000K	15.1" x 7.5" x 9.3"	
RP-B-WPT-100L-FC	250W	80W	10400		18.3" x 9.1" x 9.4"	
RP-B-WPT-150L-FC	400W	120W	15600			

SUPER flex SWITCH between WATTS & COLOR TEMPS

flexCOLOR SWITCH between 3 COLOR TEMPS

WALL PACKS



4 WALL PACK FIXTURES COMPARABLE UP TO 400W HID. Featuring a dark bronze finish, these classic designs will add safety and security to any building for years to come. No maintenance and delivering huge energy savings over old technology. Flex technologies make stocking simple.



●●● SUPERFLEX ●●● FLEXCOLOR
 RP-B-WPC ●●●



120/
277V
*

0-10V
DIMMING

70+
CRI

IP65
RATED
INGRESS
PROTECTION

-40°F TO 104°F
TRADITIONAL
/ CUT-OFF

-40°F TO 113°F
MINI

-40°F TO 122°F
ADJUSTABLE

L70
50,000hrs
RATED LIFE

* ALSO WORKS ON 208V & 240V.



PART #	WATTAGE	LUMENS	COLOR	DIMENSIONS	LISTINGS
LINEAR STRIP					
RP-B-LS-2FT-25L-840-FC	20W	2767-2830	FLEXCOLOR 3000K/ 4000K /5000K	24.0" x 3.3" x 3.0"	
RP-B-LS-2FT-25L-840-FC-OCC					
RP-B-LS-4FT-40L-840-FC	32W	4253-4374		48.0" x 3.3" x 3.0"	
RP-B-LS-4FT-40L-840-FC-OCC					
LIVC – STAIRWELL / VANITY					
RPT-P-LIVC-G2-2FT-20L-840-FWFC-R-S1	FLEXWATT 10W/ 15W /20W/30W	1267-4099	FLEXCOLOR 3000K/ 4000K /5000K	23" x 6.0" x 4.2"	
RPT-P-LIVC-G2-2FT-20L-840-FWFC-OCC-R-S1					
RPT-P-LIVC-G2-3FT-20L-840-FWFC-R-S1		1267-4099		34" x 6.0" x 4.2"	
RPT-P-LIVC-G2-3FT-20L-840-FWFC-OCC-R-S1					
RPT-P-LIVC-G2-4FT-20L-840-FWFC-R-S1	FLEXWATT 10W/ 15W /30W/40W	1267-5329		46" x 6.0" x 4.2"	
RPT-P-LIVC-G2-4FT-20L-840-FWFC-OCC-R-S1					
LBI MAX – STAIRWELL / VANITY					
RP-LBI-MAX	FLEXWATT 25W/30W/ 40W /48W	3250-6000	FLEXCOLOR 3000K/3500K/ 4000K /5000K	48" x 3.0" x 2.5"	(PENDING)

LINEAR STRIP + STAIRWELL + VANITY



3 FEATURE-PACKED MODELS IN 2 FT, 3 FT & 4 FT LENGTHS. From wide footprints to cover previous fixture void to ultra-slim, high performance strips. The stairwell fixture (LIVC) is loaded w/ controllability and flex technology. The linear strip fixture can be surface mounted or suspended and fits almost anywhere.



← **EXTRA WIDE
TO COVER OLD
FOOTPRINT**

↑ LIVC W/MODERN2 END CAP



**EXCEPTIONAL LIGHT
OUTPUT & SLIM PROFILE ↓**

↑ LS-LINEAR STRIP



*



DIMMING



OPTIONAL BI-LEVEL
ENERGY SAVING OCC



OPTIONAL EMG
BATTERY BACKUP



CRI



-4°F TO 113°F

RP-B-LS



-40°F TO 113°F

LBI MAX



-4°F TO 140°F

RPT-P-LIVC



50,000hrs
RP-B-LS / LBI MAX






100,000hrs
RPT-P-LIVC

* BASE MODELS INCLUDE 5 YEAR WARRANTY.




REMPHOS / FIXTURES

PART #	REPLACES	WATTAGE	LUMENS	COLOR	DIMENSIONS	LISTINGS
--------	----------	---------	--------	-------	------------	----------

UTILITY DRUMS

	RP-DRU-11N-14L-40K-WC-G2-A		FLEXWATT 6W/10W/16W/22W	780-3124	FLEXCOLOR 3000K/3500K/4000K	11.0" x 3.5"	 
	RP-DRU-11N-14L-40K-WC-G2-OC1-A					14.0" x 3.5"	
	RP-DRU-14N-14L-40K-WC-G2-A						
	RP-DRU-14N-14L-40K-WC-G2-OC1-A						

DESIGNER DRUMS

	RP-DRD-14N-14L-40K-WC-G2-A		FLEXWATT 6W/10W/16W/22W	780-3124	FLEXCOLOR 3000K/3500K/4000K	14.5" x 3.5"	 
	RP-DRD-14N-14L-40K-WC-G2-OC1-A					18.0" x 3.5"	
	RP-DRD-18N-14L-40K-WC-G2-A						
	RP-DRD-18N-14L-40K-WC-G2-OC1-A						

OUTDOOR DRUMS

	RP-DRO-12N-14L-40K-WC-G2		FLEXWATT 6W/10W/16W/22W	780-3124	FLEXCOLOR 3000K/3500K/4000K	12.0" x 4.0"	 
	RP-DRO-12N-14L-40K-WC-G2-OC1						

TOUGH DRUMS

	RP-DRT-13N-14L-40K-WC-G2		FLEXWATT 6W/10W/16W/22W	780-3124	FLEXCOLOR 3000K/3500K/4000K	13.0" x 3.8"	 
	RP-DRT-13N-14L-40K-WC-G2-OC1						


SCONCE

	RP-SCD-11N-8L-40K-WC-G2		FLEXWATT 6W/10W/12W/15W	780-3125	FLEXCOLOR 3000K/3500K/4000K	13.0" x 3.8"	 
	RP-SCD-11N-8L-40K-WC-G2-OCC						

REMPHOS BASE DRUMS

	RP-B-UD-14N-10L-40K-WC		FLEXWATT 6W/10W/15W	600-1500	FLEXCOLOR 3000K/3500K/4000K	14.0" x 2.75"	 
	RP-B-DD-14N-10L-40K-WC						

HIGH BAY

RP-LHB-24-140L-850-G2	250W HID	110W	14,000	5000K	24.0" x 9.6" x 2.0"	
RP-LHB-24-200L-850-G2	400W HID	165W	20,000		24.0" x 12.5" x 2.0"	
RP-LHB-48-390L-850-G2	1000W HID	300W	40,000		46.0" x 12.5" x 2.0"	

HIGH BAY ACCESSORIES

PART #	DESCRIPTION	PART #	DESCRIPTION	PART #	DESCRIPTION
RP-LHB-SURFMT	SURFACE MNT BRACKET	RP-LHB-PENDANT	PENDANT MOUNT KIT	RP-LHB-PIRSENSOR	PIR SENSOR (EXT)
RP-LHB-MWSENSOR	MICROWAVE SENSOR (EXT)	RP-LHB-BBU24W	BATTERY BACKUP 24W	RP-LHB-WIREGUARD-200L	WIRE GUARD FOR 200L
				RP-LHB-WIREGUARD-390L	WIRE GUARD FOR 390L



WALL + CEILING + HIGH BAY FIXTURES



6 DRUM AND SCONCE FIXTURES IN SEVERAL SIZES & DESIGNS. All feature flexwatt and flexcolor for easy stocking and field adjustability. The linear high bay fixtures are comparable to 400W and 1000W HID, and can be installed in high ceiling environments.



**FUTURE-PROOF
& FLEXIBLE**

⬆️ RP-B-UD-BASE UTILITY DRUM



RP-SCD-SCONCE ⬆️



**SURFACE MOUNT
OR PENDANT MOUNT**

RP-LHB-LINEAR HIGH BAY ⬆️



* YEAR WARRANTY



120/
277V

**



BASE DRUM



DRUM / SCONCE / LHB



CRI



-4°F TO 122°F

BASE DRUM / LHB



-4°F TO 140°F

DRUM / SCONCE



50,000hrs
BASE DRUM / LHB



100,000hrs
DRUM / SCONCE

* BASE MODELS INCLUDE 5 YEAR WARRANTY. ** ALSO WORKS ON 208V & 240V, EXCLUDES BASE MODELS WHICH ARE 120V ONLY.



PART #	WATTAGE	LUMENS	COLOR	DIMENSIONS	LISTINGS
--------	---------	--------	-------	------------	----------

LED CR - CIRCULAR RETROFIT KITS

RPT-P-LED CR-G2-9IN-14L-840-FWFC	FLEXWATT 6W/ 10W /16W/22W	780-3124	FLEXCOLOR 3000K/ 3500K /4000K	8.7" x 8.7" x 2.0"	
RPT-P-LED CR-G2-9IN-14L-840-FWFC-OCC					

LED SR - SCENCE RETROFIT KITS

RPT-P-LED SR-G2-4IN-8L-840-FWFC	FLEXWATT 6W/10W/12W/15W	780-2130	FLEXCOLOR 3000K/ 3500K /4000K	6.5" x 7.0" x 2.1"	
RPT-P-LED SR-G2-4IN-8L-840-FWFC-OCC				8.7" X 4.5" x 2.0"	
RPT-P-LED SR-G2-9IN-8L-840-FWFC					
RPT-P-LED SR-G2-9IN-8L-840-FWFC-OCC				14.0" x 2.7" x 2.1"	
RPT-P-LED SR-G2-14INE-8L-840-FWFC					
RPT-P-LED SR-G2-14INE-8L-840-FWFC-OCC					
RPT-P-LED SR-G2-14INM-8L-840-FWFC					
RPT-P-LED SR-G2-14INM-8L-840-FWFC-OCC					

BASE LED CR - CIRCULAR RETROFIT KITS

RP-B-CR-9N-12L-40K-WC	FLEXWATT 6.5W/ 10W /15W	800-1800	FLEXCOLOR 3000K/ 3500K /4000K	9.0" x 9.0" x 1.2"	
-----------------------	------------------------------------------	----------	------------------------------------------------	--------------------	--

BLOCK RETROFIT KITS*

LED-8280-50K	280W	38765-39200	5000K	10.0 "x 5.6" x 10.6"	
LED-8280-50K-HV					
RPT-LEDBLOCK-65L-750-10VDIM-G3	30W	5100	5000K	4.7" x 2.3" x 6.1"	
RPT-LEDBLOCK-100L-750-10VDIM-G3	52W	8850			
RPT-LEDBLOCK-150L-750-10VDIM-G3	97W	15700		5.1" x 2.3" x 6.1"	
RPT-LEDBLOCK-200L-750-10VDIM-G3	124W	20000			
RPT-LEDBLOCK-300L-750-10VDIM-G3	150W	24000		6.0" x 2.3" x 7.9"	
RPT-LEDBLOCK-400L-750-10VDIM-G3	270W	43000		10.0" x 2.3" x 10.6"	

* DIMENSIONS ARE FOR LED ARRAY ONLY.



WALL + CEILING + BLOCK RETROFIT KITS



KEEP YOUR EXISTING FIXTURE AND FUTURE-PROOF IT. Our retrofit kits can upgrade any existing fixture, from a tiny wall sconce to a 1000W shoe box. Control options are available throughout the line. Size variety and mounting differences are also covered through our unique engineered designs.



←
EXTREMELY
FLEXIBLE
HARD-WIRED
RETROFIT KIT
FOR HID FIXTURES

↑ LEDBLOCK KIT



5 STYLES
4 LUMEN PACKAGES
3 COLOR TEMPS
2 CONTROL OPTIONS
1 PERFECT SOLUTION

LED CR (ABOVE) ↑

↓ LEDSR-14INE, 14INM, 4IN, 9IN (LEFT TO RIGHT)



* 5 YEAR WARRANTY



120/
277V

**



0-10V
LED CR / LEDSR /
RPT-LEDBLOCK



BASE LED CR



CRI



-40°F TO 113°F
RPT-LEDBLOCK



-4°F TO 113°F
LED-8280 (BLOCK KIT)



-4°F TO 140°F
LED CR / LEDSR

* BASE LED CR AND LED-8280 BLOCK KIT MODELS INCLUDE A 5 YEAR WARRANTY. ** BASE LED CR IS 120V ONLY. HIGH VOLTAGE 240-347V AVAILABLE FOR LED-8280 BLOCK KIT.



SOLAR
LIGHTS



HYBRID
365



OFF-GRID



PART #	COMPARES TO	WATTAGE	LUMENS	COLOR	EPA	DIMENSIONS	LISTINGS
HYBRID SOLAR AREA LIGHT							
SL-SAL-HYB-30W-40K-SF-BK-G2	250W	30W	5900	4000K	4.45	11.2" x 3.5" x 16.3" (FIXTURE) 15.9" x 31.5" (SOLAR PANEL)	
SL-SAL-HYB-50W-40K-SF-BK-G2	400W	50W	9800	4000K	6.1	11.2" x 7.0" x 16.3" (FIXTURE) 31.8" x 31.5" (SOLAR PANEL)	

OFF-GRID SOLAR AREA LIGHT							
RP-SAL-8W-50K-SF-GY-G2	70W	8W	1600	5000K	1.824	20.0" x 12.0" x 3.0"	
RP-SAL-8W-50K-SF-DB-G2							
RP-SAL-30W-50K-SF-GY-G2	250W	30W	6000	5000K	4.788	36.0" x 16.8" x 3.8"	
RP-SAL-30W-50K-SF-DB-G2							
RP-SAL-8W-AMB-SF-GY-G2	70W	8W	284	580nm AMBER	1.824	20.0" x 12.0" x 3.0"	
RP-SAL-30W-AMB-SF-GY-G2	250W	30W	806	580nm AMBER	4.788	36.0" x 16.8" x 3.8"	
SL-SAL-OG-30W-50K-SF-BK-G2	250W	30W	5900	5000K	4.45	11.2" x 3.5" x 16.3" (FIXTURE) 15.9" x 31.5" (SOLAR PANEL)	
SL-SAL-OG-50W-50K-SF-BK-G2	400W	50W	9800	5000K	6.1	11.2" x 7.0" x 16.3" (FIXTURE) 31.8" x 31.5" (SOLAR PANEL)	

SOLAR AREA LIGHT ACCESSORIES

FOR USE W/ SL-SAL OFF-GRID + HYBRID MODELS		FOR USE W/ RP-SAL OFF-GRID MODELS	
PART #	DESCRIPTION	PART #	DESCRIPTION
SL-SAL-BKT-RP-BK-G1	ROUND POLE BRACKET	RP-SAL-BKT-8W-RP-G1	ROUND POLE BRACKET
SL-SAL-BKT-SP-BK-G1	SQUARE POLE BRACKET	RP-SAL-BKT-8W-SP-G1	SQUARE POLE BRACKET
SL-SAL-BKT-ST-3-BK-G1	TENON ADAPTER FOR 3" SQUARE POLE	RP-SAL-BKT-8W-TN-G1	TRUNNION BRACKET FOR 8W
SL-SAL-BKT-RT-3-BK-G1	TENON ADAPTER FOR 3" ROUND POLE	RP-SAL-BKT-30W-RP-G1	ROUND POLE BRACKET FOR 30W
SL-SAL-BKT-WM-BK-G1	WALL MOUNT BRACKET	RP-SAL-BKT-30W-SP-G1	SQUARE POLE BRACKET FOR 30W
ALL MODELS INCLUDE A STANDARD SLIP FITTER MOUNTING BRACKET. * INCLUDED STANDARD W/ EACH FIXTURE ORDERED.		RP-SAL-BKT-30W-TN-G1	TRUNNION BRACKET FOR 30W
		RP-SAL-REMOTE-G1*	REMOTE CONTROL
		RP-SAL-BIRDGUARD	DETERS BIRDS FROM PERCHING ON FIXTURE

FOR USE W/ SL-SAL OFF-GRID + HYBRID MODELS



FOR USE W/ RP-SAL OFF-GRID MODELS



AREA LIGHTS



6 MODELS TO CHOOSE FROM WITH HID EQUIVALENCE FROM 70W TO 400W. The off-grid fixtures are powered entirely by the sun, requiring no trenching or wiring – free to shine. Hybrid models are powered by the sun and backed up by line-voltage for guaranteed light every night.

HYBRID 365
POWERED BY THE SUN &
BACKED-UP BY LINE-VOLTAGE

OFF-GRID
100% POWERED BY THE SUN



SL-SAL-30W →

↕ SL-SAL-50W

RP-SAL-50/30W ↕

OPERATING MODES | TIMER | MOTION SENSING



CERTIFIED BATTERY



RP-SAL



SL-SAL



RP-SAL



SL-SAL



BATTERY LIFE



REPLACEABLE BATTERY



REMOTE CONTROL



RP-SAL



SL-SAL



MOTION SENSING



100,000hrs RATED LIFE

improve pedestrian safety

48



← RP-SBL-2W



SL-SPT-20W ↑

OFF-GRID SOLAR BOLLARD LIGHT

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	LISTINGS
RP-SBL-2W-30K-BK-G1	30W HALOGEN	266	3000K	8" x 30"	CE FC
RP-SBL-2W-40K-BK-G1			4000K		

OPERATING MODE | DUSK TO DAWN

OFF-GRID SOLAR

PART #	COMPARES TO	LUMENS
SL-SPT-20W-30K-SF-G2	150W HID	2000
SL-SPT-20W-40K-SF-G2		

OPERATING MODES



BATTERY CHARGE TIME



BATTERY CHARGING TEMP



BATTERY LIFE



BEAM ANGLE



-13°F TO 140°F

OPERATING TEMP



100,000hrs RATED LIFE



BATTERY CHARGE TIME



BATTERY CHARGING TEMP



BATTERY LIFE

BOLLARD + POST TOPS



3 UNIQUE, OFF-GRID MODELS TO HELP LIGHT ANY AREA THAT NEEDS IT. The bollard is rugged and reliable, ready to light pathways, piers and more. Post tops have a classic decorative design and is brighter than you would expect.



PERFECT FOR PATHWAYS

← SL-CPT

POST TOP LIGHT

COLOR	DIMENSIONS	EPA	LISTINGS
3000K	16" x 32"	2.2	CE FC
4000K			

☀️ DUSK TO DAWN | ⌚ TIMER | 🚶 MOTION SENSING

OFF-GRID SOLAR PATHWAY LIGHT

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	EPA	LISTINGS
SL-CPT-25L-30K-BK-G1	150W	2500	3000K	21.3" x 13.4"	1.0 SF	CE FC
SL-CPT-25L-40K-BK-G1			4000K			

ACCESSORIES

SL-CPT-BATTERY

REPLACEMENT BATTERY

OPERATING MODES

☀️ CONSTANT BRIGHTNESS | ⌚ TIMER | 🚶 MOTION SENSING



BEAM ANGLE



-4°F TO 149°F

OPERATING TEMP



100,000hrs
RATED LIFE



3
YEAR
WARRANTY



7-8
HRS
BATTERY
CHARGE TIME



32°F
TO
122°F
BATTERY
CHARGING TEMP



UP TO
30
HRS
BATTERY LIFE

*



REPLACEABLE
BATTERY



160°
BEAM ANGLE



-4°F TO 122°F

OPERATING TEMP



50,000hrs
RATED LIFE


* ON 2HR + SENSOR MODE.

SOLERA SOLAR / OFF-GRID

ADJUSTABLE

— GET LIGHT EXACTLY WHERE YOU NEED IT

50

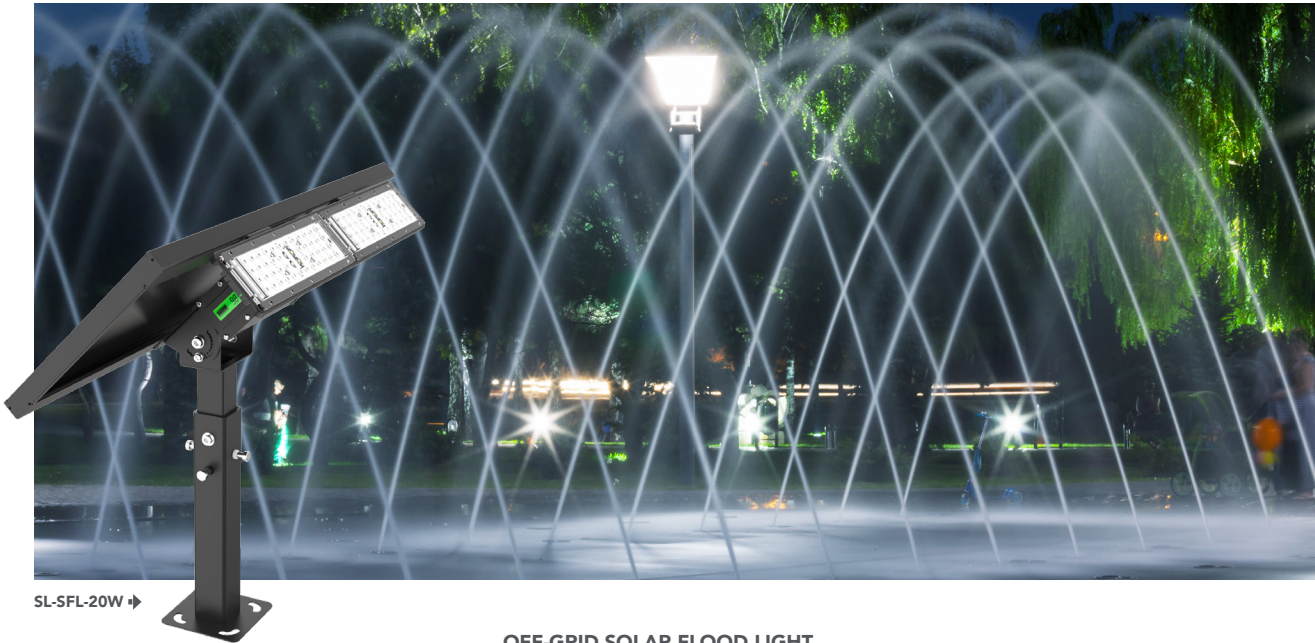SL-SFL-20W →

OFF-GRID SOLAR FLOOD LIGHT

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	ADJ HEIGHT	LISTINGS
SL-SFL-20W-40K-BK-G2	150W HID	2000	4000K	26" x 11" (PANEL w/LIGHT)	16" TO 21"	CE FC

OPERATING MODE | ☀️ CONSTANT BRIGHTNESS | ⌚ TIMER



available
2FT & 4FT

SL-SDL-20W ↑

OFF-GRID SOLAR

PART #	COMPARES TO	LUMENS
SL-SDL-2FT-40K-BK-G2	70W HID	750
SL-SDL-20W-40K-BK-G2	150W HID	2000

ACCESSORIES

N/A	SURFACE MOUNT BRKT (INCLUDED)
RP-SDL-BK-LB	7" CLAMP MOUNT BRKT (2 PK)



BATTERY CHARGE TIME



BATTERY CHARGING TEMP



BATTERY LIFE



BEAM ANGLE



-4°F TO 140°F

OPERATING TEMP



50,000hrs RATED LIFE



BATTERY CHARGE TIME



BATTERY CHARGING TEMP



BATTERY LIFE

DISPLAY + FLOOD LIGHTS + MULTIFUNCTIONAL LIGHTS



3 FLEXIBLE & POWERFUL, OFF-GRID MODELS UP TO 150W HID. Perfect for entrance signs, landscape features and more. The display light collects sun and cast light downwards. The flood light has an adjustable light array to aim at the desired object to illuminate.



PERFECT FOR SIGNAGE, BILLBOARDS & MORE



← SL-SMFL-10W

DISPLAY LIGHT

COLOR	DIMENSIONS	LISTINGS
4000K	23.6" x 4.3" x 4.3"	CE FC
4000K	47.2" x 4.3" x 4.3"	

OPERATING MODES

☀️ CONSTANT BRIGHTNESS | ⌚ TIMER

OFF-GRID SOLAR MULTIFUNCTIONAL FLOOD LIGHT

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	LISTINGS
SL-SMFL-10W-40K-BK-G1	70W HID	1100	4000K	9.1" x 6.5" (LIGHT) 13.6" x 9.3" (PANEL)	CE FC

OPERATING MODES | ☀️ CONSTANT BRIGHTNESS | ⌚ TIMER | 🚶 MOTION SENSING

120°
BEAM ANGLE

-4°F TO 140°F
OPERATING TEMP

L70
50,000hrs
RATED LIFE

3
YEAR
WARRANTY

8-9
HRS
BATTERY
CHARGE TIME

32°F
TO
140°F
BATTERY
CHARGING TEMP

UP TO
24
HRS
BATTERY LIFE

90°
BEAM ANGLE

-4°F TO 140°F
OPERATING TEMP

L70
50,000hrs
RATED LIFE

ALL-in-one DESIGN



SL-SWL ↗

OFF-GRID SOLAR WALL PACKS

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	LISTINGS
SL-SWL-7W-40K-SF-G2	50W HID	700	4000K	8" x 9" x 4"	CE FC
SL-SWL-15W-40K-SF-G2	100W HID	1500		10" x 12" x 5"	

OPERATING MODES | ☀️ DUSK TO DAWN | 🕒 TIMER | 🚶 MOTION SENSING



SL-SWL-20W ↗

OFF-GRID SOLAR

PART #	COMPARES TO	LUMENS
SL-SWL-20W-40K-G2	150W HID	2000

OPERATING MODES



WALL PACK + STEP LIGHTS



4 OFF-GRID MODELS TO HELP CAST LIGHT WHEREVER IT IS NEEDED. Large wall pack fixtures with adjustable solar panels provide powerful performance to the sides of buildings. Smaller wall pack and rugged step lights can provide safety and security around decks, staircases and more.



SL-SSL ↑

MINI WALL PACK

COLOR	DIMENSIONS	LISTINGS
4000K	8" x 5" x 3"	CE FC

☀️ DUSK TO DAWN | ⌚️ TIMER | 🚶️ MOTION SENSING

OFF-GRID SOLAR STEP LIGHT

PART #	COMPARES TO	LUMENS	COLOR	DIMENSIONS	LISTINGS
SL-SSL-1W-40K-GY-G2	20W HALOGEN	50	4000K	8" x 5" x 3"	CE FC

OPERATING MODE | ☀️ DUSK TO DAWN



BEAM ANGLE



-13°F TO 140°F^F
OPERATING TEMP



35,000hrs
RATED LIFE



3
YEAR
WARRANTY



7
HRS
BATTERY
CHARGE TIME



32°F
TO
149°F^F
BATTERY
CHARGING TEMP



UP TO
50
HRS
BATTERY LIFE



BEAM ANGLE



-13°F TO 149°F^F
OPERATING TEMP



35,000hrs
RATED LIFE

breeZEV



VEHICLE
CHARGERS

S48

R40

R48

P48

P80

SMART · SIMPLE · CHARGING

| NO INTERNET CONNECTION OR SOFTWARE REQUIRED |

S48

24A / 32A / 40A / 48A
(SWITCH SELECTABLE)

SIMPLY PLUG + CHARGE

18 OR 25 FT CABLE
W/ SAE J1772 CONNECTOR

1 FT CORD W/ NEMA
14-50 PLUG OR HARDWIRE

RESIDENTIAL / FLEET



R40

24A / 32A / 40A
(SWITCH SELECTABLE)

REQUIRES RFID TO CHARGE*

18 OR 25 FT CABLE
W/ SAE J1772 CONNECTOR

HARDWIRE
(WIRING KIT INCLUDED)

COMMERCIAL / FLEET



R48

24A / 32A / 40A / 48A
(SWITCH SELECTABLE)

REQUIRES RFID TO CHARGE*

18 OR 25 FT CABLE
W/ SAE J1772 CONNECTOR

HARDWIRE
(WIRING KIT INCLUDED)

COMMERCIAL / FLEET



* 5 RFID CARDS INCLUDED.

LEVEL 2 ELECTRIC VEHICLE CHARGERS



| LCD SCREEN + SMART CHARGING + AMPUP PRO |

P48

16A / 32A / 40A / 48A (SWITCH SELECTABLE)

SMART CHARGING

12, 18 OR 25 FT CABLE
W/ SAE J1772 CONNECTOR

HARDWIRE (WIRING KIT INCLUDED)

COMMERCIAL / FLEET



P80

8A / 16A / 24A / 32A / 40A / 48A / 56A /
64A / 72A / 80A (SWITCH SELECTABLE)

SMART CHARGING

18 FT CABLE W/ SAE J1772 CONNECTOR

HARDWIRE (WIRING KIT INCLUDED)

COMMERCIAL / FLEET



← **OUR MOST POPULAR CONFIGURATION**
SEE BELOW ORDERING INSTRUCTIONS



ASK ABOUT
CUSTOM BRANDING →




PART #	DESCRIPTION	QTY
EVC-L2-48A-L1-1-4G-D-AU-P-1	48A MAX CHARGER, SCREEN, RFID, 4G CELLULAR, WALL-MNT, AMPUP PRO 1YR PLAN	2
EVC-L2-CBL-48A-L1-1-18X8	48A CABLE SET, 18 FT LENGTH, 8AWG	2
EVC-L2-ACC-LPK2	LOWER PEDESTAL KIT	1
EVC-L2-ACC-CM	CABLE MANAGEMENT FOR PEDESTAL W/ 2 RETRACTORS	1
EVC-L2-ACC-SSB	BRACKET FOR SIDE-BY-SIDE INSTALL OF CHARGERS	1



ELECTRIC VEHICLE CHARGER MOUNTING OPTIONS



PEDESTALS AND MOUNTING OPTIONS — MADE IN THE USA

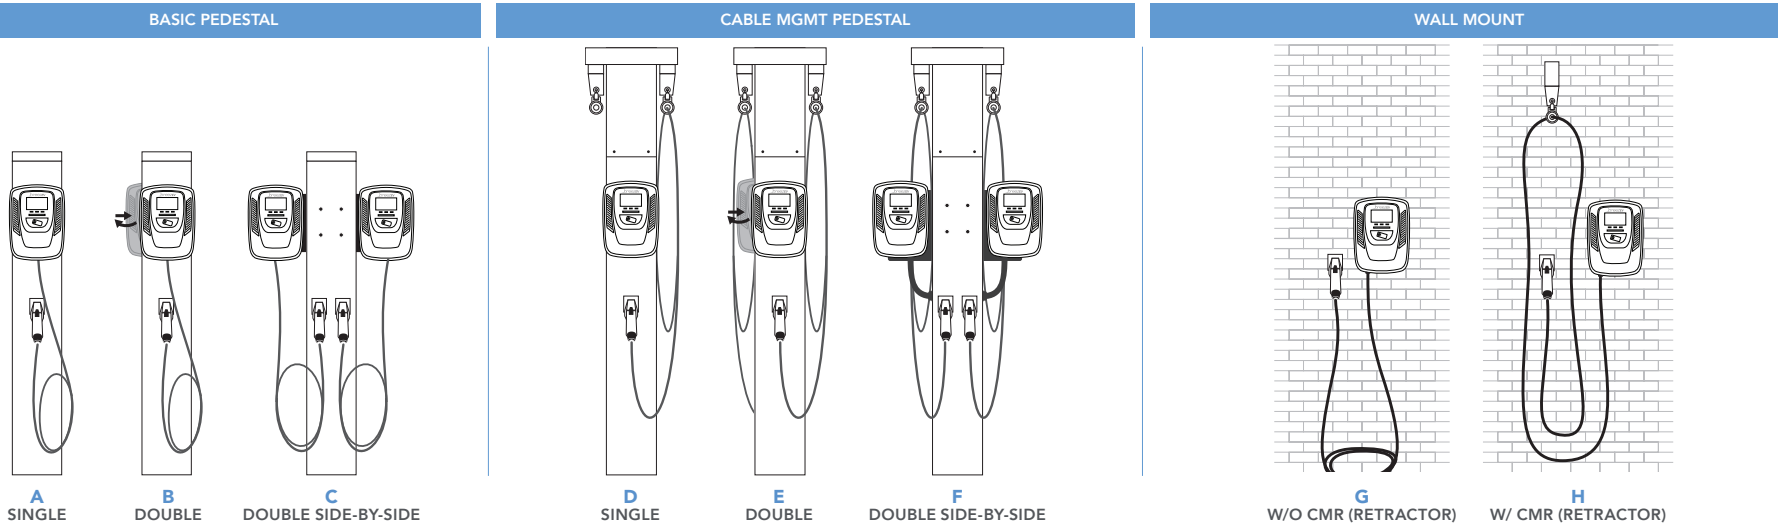


	A	B	C	D	E	F	G	H
CHARGE UNIT	x1	x2	x2	x1	x2	x2	x1	x1
CABLE*	x1	x2	x2	x1	x2	x2	x1	x1
PEDESTAL / EVC-L2-ACC-LPK2	x1	x1	x1	x1	x1	x1		
CAP W/CABLE MGMT / EVC-L2-ACC-CM				x1	x1	x1		
BRACKET / EVC-L2-ACC-SSB			x1			x1		
CABLE RETRACTOR / EVC-L2-ACC-CMR								x1

* DOES NOT APPLY WHEN PURCHASING ALL-IN-ONE KIT.





LEVEL 2 EV CHARGER TESTER

PART #	DESCRIPTION
EVC-L2-ACC-TESTER-J1772	VERIFY THE CORRECT OPERATION AND SETTING OF AN EV CHARGER AFTER INSTALLATION, W/O AN ELECTRIC VEHICLE PRESENT


PART #	AMPS	CONNECTOR	NETWORK	USER INTERFACE	OCPP SOFTWARE	UNIT DIMENSIONS	LISTINGS
S48 ALL-IN-ONE KIT (INCLUDES CHARGER W/ 18 FT OR 25 FT, 8AWG, 48A CABLE)							
EVC-L2-S48-18	UP TO 48A	SAE J1772	N/A	N/A	N/A	8" x 9.2" x 4"	
EVC-L2-S48-25							

S48 | IN THE BOX

 <p>1 FT INPUT CORD W/ NEMA 14-50 PLUG (ATTACHED TO UNIT)</p>	 <p>18 FT (S48-18) OR 25 FT (S48-25) OUTPUT CORD W/ SAE J1772 CONNECTOR</p>	 <p>CABLE HOOK W/ HOLSTER + BACKPLATE</p>	<p>MOUNTING HARDWARE + INSTRUCTIONS</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------

PART #	AMPS	CONNECTOR	NETWORK	USER INTERFACE	OCPP SOFTWARE	UNIT DIMENSIONS	LISTINGS
R40 ALL-IN-ONE KIT (INCLUDES CHARGER W/ 18 FT OR 25 FT, 10AWG, 40A CABLE)							
EVC-L2-R40-18	UP TO 40A	SAE J1772	RFID	N/A	N/A	9.8" x 14.2" x 3.9"	
EVC-L2-R40-25							

R48 | ALL-IN-ONE KIT (INCLUDES CHARGER W/ 18 FT OR 25 FT, 8AWG, 48A CABLE)

EVC-L2-R48-18	UP TO 48A	SAE J1772	RFID	N/A	N/A	9.8" x 14.2" x 3.9"	
EVC-L2-R48-25							

R40 / R48 | IN THE BOX

 <p>18 FT (R40-18/R48-18) OR 25 FT (R40-25/R48-25) OUTPUT CORD W/ SAE J1772 CONNECTOR</p>	 <p>5 RFID CARDS</p>	<p>MOUNTING HARDWARE + INSTRUCTIONS</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------	---------------------------------------------

ELECTRICAL PROTECTIONS INCLUDED

OVER CURRENT	UNDER VOLTAGE / OVER VOLTAGE	SHORT CIRCUIT	GROUND FAULT
RESIDUAL CURRENT	SURGE PROTECTION	OVER TEMPERATURE	CURRENT LEAKAGE PROTECTION

PART #	DESCRIPTION	PART #	DESCRIPTION
PEDESTALS / ACCESSORIES			
EVC-L2-ACC-S48-PK*	S48 PEDESTAL MOUNTING KIT	EVC-L2-ACC-CM	CABLE MGMT FOR PEDESTAL W/ 2 RETRACTORS
EVC-L2-ACC-LPK2	LOWER PEDESTAL KIT FOR L2 CHARGER	EVC-L2-ACC-CM1	CABLE MGMT FOR PEDESTAL W/ 1 RETRACTOR
EVC-L2-ACC-ANCHOR KIT WET	WET CONCRETE ANCHOR KIT	EVC-L2-ACC-CMR	CABLE RETRACTOR W/ SPRING LOADED TETHER
EVC-L2-ACC-MAKE READY BASE	CHARGING STATION FOUNDATION	EVC-L2-ACC-SSB	BRACKET FOR SIDE-BY-SIDE CHARGERS

* REQUIRED FOR MOUNTING S48 ON PEDESTAL (FOR USE WITH S48 ONLY).



S48 / R40 / R48



LEVEL 2, ELECTRIC VEHICLE CHARGERS. Simply plug and charge. No internet connection or software required. Offering up to 48A charging power and are the perfect EV charging solution for residential and commercial applications.



200-240V AC

SINGLE PHASE

11.5 kW
S48 MAX OUTPUT

9.6 kW
R40 MAX OUTPUT

11.5 kW
R48 MAX OUTPUT

NATURAL COOLING

-40°F TO 122°F
OPERATING TEMP

IP65
INGRESS PROTECTION

IK08
IMPACT RESISTANCE

ANTI UV PAINT

PART #	CHRG AMPS	CONNECTOR	NETWORK	USER INTERFACE	OCPP SOFTWARE	UNIT DIMENSIONS	LISTINGS
P48 ALL-IN-ONE KIT (INCLUDES CHARGER W/ 18FT, 48A CABLE SET)							
EVC-L2-48A-L1-1-4G-D	UP TO 48A	SAE J1772	ETHERNET/RFID/4G	LCD DISPLAY	1YR AMPUP PRO	9.8" x 13.8" x 5.1"	

P48 | CHARGER ONLY

EVC-L2-48A-L1-1-4G-D-AU-P-1	UP TO 48A	SAE J1772	ETHERNET/RFID/4G	LCD DISPLAY	1YR AMPUP PRO	9.8" x 13.8" x 5.1"	
EVC-L2-48A-L1-1-4G-D-AU-P-5					5YR AMPUP PRO		

P80 | ALL-IN-ONE KIT (INCLUDES CHARGER W/ 18FT, 80A CABLE SET)

EVC-L2-P80-18-AP1	UP TO 80A	SAE J1772	ETHERNET/RFID/4G	LCD DISPLAY	1YR AMPUP PRO	9.8" x 13.8" x 5.1"	
EVC-L2-P80-18-AP5					5YR AMPUP PRO		

ELECTRICAL PROTECTIONS INCLUDED

OVER CURRENT	UNDER VOLTAGE / OVER VOLTAGE	SHORT CIRCUIT	GROUND FAULT
RESIDUAL CURRENT	SURGE PROTECTION	OVER TEMPERATURE	CURRENT LEAKAGE PROTECTION

PART #	DESCRIPTION	PART #	DESCRIPTION
CABLE SETS			
EVC-L2-CBL-40A-L1-1-12x10	40A CABLE SET, 12 FT LENGTH, 10AWG	EVC-L2-CBL-48A-L1-1-12x8	48A CABLE SET, 12 FT LENGTH, 8AWG
EVC-L2-CBL-40A-L1-1-18x10	40A CABLE SET, 18 FT LENGTH, 10AWG	EVC-L2-CBL-48A-L1-1-18x8	48A CABLE SET, 18 FT LENGTH, 8AWG
EVC-L2-CBL-40A-L1-1-25x10	40A CABLE SET, 25 FT LENGTH, 10AWG	EVC-L2-CBL-48A-L1-1-25x8	48A CABLE SET, 25 FT LENGTH, 8AWG

PEDESTALS / ACCESSORIES

EVC-L2-ACC-LPK2	LOWER PEDESTAL KIT FOR L2 CHARGER	EVC-L2-ACC-CM	CABLE MGMT FOR PEDESTAL W/ 2 RETRACTORS
EVC-L2-ACC-SSB	BRACKET FOR SIDE-BY-SIDE CHARGERS	EVC-L2-ACC-CM1	CABLE MGMT FOR PEDESTAL W/ 1 RETRACTOR
EVC-L2-ACC-ANCHOR KIT WET	WET CONCRETE ANCHOR KIT	EVC-L2-ACC-CMR	CABLE RETRACTOR W/ SPRING LOADED TETHER
EVC-L2-ACC-MAKE READY BASE	CHARGING STATION FOUNDATION	EVC-L2-ACC-HAD	HOOK/HOLSTER FOR WALL MOUNTING

ampUp PRO INCLUDED

ANALYTICS & REPORTING	LOCATION ACCESS CONTROL	SESSION LIMITS & IDLE FEES	TIME-OF-USE RATES	ADVANCED LOAD MANAGEMENT
DRIVER RESERVATIONS	DRIVER ACCESS GROUPS	REVENUE COLLECTION & DIRECT DEPOSIT	MULTI-SITE MANAGEMENT	DRIVER & HOST SUPPORT
DRIVER RFID CARD	TIME-BASED ACCESS CONTROL	TIERED PRICING	MULTI-USER ACCOUNT	REMOTE TROUBLESHOOTING





SMART LEVEL 2, ELECTRIC VEHICLE CHARGERS EQUIPPED W/ LCD SCREEN, RFID, OCPP NETWORKED. Up to 80A charging power along with built-in ampUp software. Pedestals and mounting options are all made in the USA, and can be custom branded to match your needs.



← P48 / P80



*

200-240VAC



SINGLE PHASE



NETWORK CONNECTIVITY

11.2 kW

P48 MAX OUTPUT

19.2 kW

P80 MAX OUTPUT



NATURAL COOLING



-22°F to 122°F
OPERATING TEMP



IP65
INGRESS PROTECTION



IK08
IMPACT RESISTANCE



ANTI UV PAINT

* 5 YEAR EXTENDED WARRANTY AVAILABLE.



2' & 3' PRODUCT GONDOLA

2'
(24" x 14" x 78")
LED-9902


3'
(36" x 14" x 78")
LED-9903




PRODUCT(S) ORDERED SEPARATELY

SELECTOR GUIDE & COUNTER MAT

→
SELECTOR GUIDE
17" x 11"



←
ALSO AVAILABLE W/ GROMMET AND RING CLIP FOR ATTACHING TO GONDOLA.

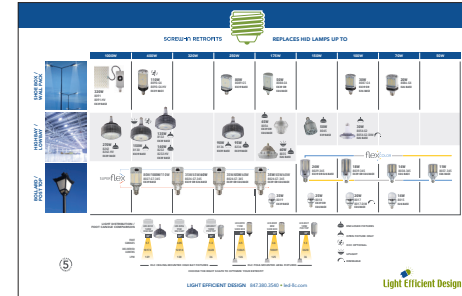

←
COUNTER MAT
24" x 17"

PRODUCT DEMO DISPLAYS



8" x 10" x 4"

PRODUCT(S) ORDERED SEPARATELY

SCREW-IN RETROFIT
w/FLEXCOLOR
LED-9800



6" x 10" x 16"

SCREW-IN RETROFIT
w/HORIZ & BASE-DOWN
SOCKET POSITIONS
LED-9900



16" x 5" x 10"

PIN-BASE RETROFITS
LED-9750



10" x 9" x 22"

PRODUCT(S) INCLUDED w/DISPLAY

LBI - LINEAR BARKIT
RP-LBI-G1-1F-2X-DISPLAY



9" X 9" X 16"

SOLAR WALL PACK
SL-9100

SALES + MARKETING MATERIALS



2' X 4' WALL BANNERS

33.5" X 84" BANNER STANDS



▲ SCREW-IN RETROFITS



▲ SOLERA SOLAR




▲ BREEZEV



BREEZEV ▲



LED / REMPHOS / SOLERA / BREEZEV ▲

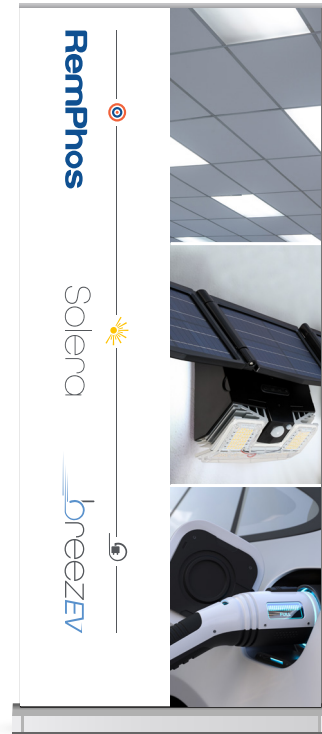


NOTE additional designs are available and graphics are updated frequently

...and **MORE** CONTACT YOUR REGIONAL MANAGER FOR A FULL LIST OF OFFERINGS



BREEZE OVER...
INNOVATION & MANUFACTURING CENTER
 Home to our Product Showroom & Training Space. Located 30 minutes from Boston, in Middleton MA.

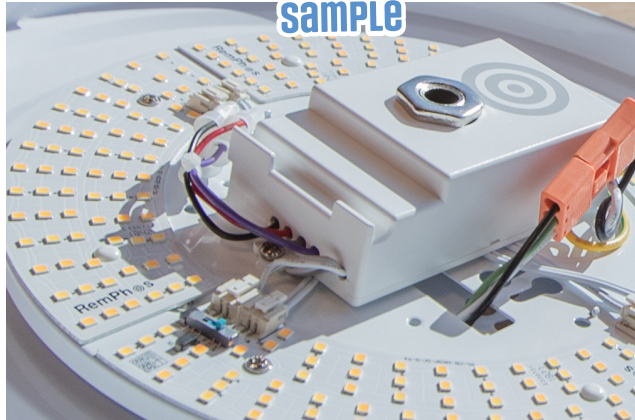

SAMPLES ARE AVAILABLE*...
 Try our LED retrofits in your project with no risk. When done, simply, return in original carton within 60 days. No restocking fee, no questions asked.



JOIN US...
 Stay up to date with our latest product offerings, company & industry news!
FYI...we love giving away cool swag & gift cards during our PRO WORKSHOPS!

EMAIL edison@led-llc.com FOR DETAILS

* UP TO 4 PIECES





Light Efficient Design

CORPORATE HEADQUARTERS • Cary, IL | INNOVATION & MANUFACTURING CENTER • Middleton, MA
847.380.3540 • led-llc.com • sales@led-llc.com