









### — LBI Versatility (common applications)

<p>APPLICATION</p>	<p><b>DECORATIVE PENDENT MOUNT FIXTURES</b></p> <p>— Office Space</p>		<p>RECOMMENDED ACCESSORIES</p>	<ul style="list-style-type: none"> <li>Suspended In-Line Bracket Kit</li> <li>Linking Cables</li> <li>Seamless Connectors</li> <li>90 Degree Incoming Power Cable</li> </ul>	
<p>APPLICATION</p>	<p><b>CONTINUOUS RUN</b></p> <p>— Warehouse Space</p>			<p>RECOMMENDED ACCESSORIES</p>	<ul style="list-style-type: none"> <li>Seamless Connectors</li> <li>OC2 Sensor</li> </ul>
<p>APPLICATION</p>	<p><b>COVE LIGHTING</b></p> <p>— Hospitality</p>			<p>RECOMMENDED ACCESSORIES</p>	<ul style="list-style-type: none"> <li>45 Degree Bracket</li> <li>Seamless Connectors</li> <li>Linking Cables</li> </ul>
<p>APPLICATION</p>	<p><b>COOLERS</b></p> <p>— Grocery or Convenient Stores</p>			<p>RECOMMENDED ACCESSORIES</p>	<ul style="list-style-type: none"> <li>Seamless Connectors</li> <li>Linking Cables</li> </ul>

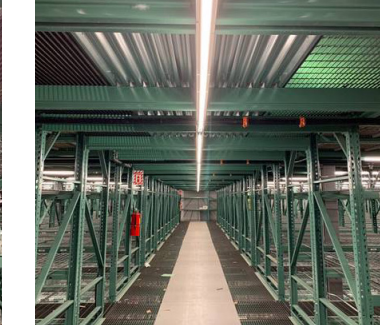**INCOMING POWER KIT**  
 One kit is required per continuous run of LBI  
**RP-LBI-G1-IP-3F-DIM**

**INCLUDED WITH KIT**

- Incoming Power Cable / Pigtail
- Service Disconnect & Abrasion Protection Grommet



Used to hard wire the incoming power cable into fixture or junction box.

## CONNECTORS & CONTROLS




### LINKING CABLES

RP-LBI-LC-6IN-DIM  
 RP-LBI-LC-6IN-NODIM  
 RP-LBI-LC-12IN-DIM  
 RP-LBI-LC-12IN-NODIM  
 RP-LBI-LC-18IN-DIM  
 RP-LBI-LC-18IN-NODIM



Quickly link LBI together in fixtures, around corners and more.  
**CUSTOM LENGTHS AVAILABLE**



### SEAMLESS CONNECTORS

RP-LBI-SSC-DIM-10P  
 RP-LBI-SSC-NODIM-10P



Connect LBI together resulting in a seamless run of lighting.



### OC2 SENSOR KIT

RP-LBI-OC2 (SINGLE PACK)



Tri-Level, remote programmable high frequency motion and daylight sensor designed to easily integrate with the LBI bars.



### EMERGENCY DRIVER (EMG-H SERIES)

RP-LBI-EMG2-8W-DIM  
 RP-LBI-EMG2-25W-DIM



Emergency solution for LBI. It allows the LBI to be used for normal and emergency operation.



### 4.7IN SPACER CONNECTOR

RP-LBI-SRC-4.7IN (SINGLE PACK)



Use the 4.7in spacer connector to bring the length of the bar system to a standard dimension.



### LBI JUNCTION BOX

RP-LBI-JBOX-1.5X4



The LBI junction box is used to connect LBI wiring to branch circuits.

**NOTE** for undercabinet or task lighting, the junction box includes an optional 120V on/off switch that can be installed into a knock-out on the cover



### CORD WITH PLUG & ON/OFF SWITCH

RP-LBI-G1-IP-2F-120V-SW  
 RP-LBI-G1-IP-7F-120V-SW



Used when powering the LBI bars from a standard '3 prong' electrical outlet (NEMA 5-15 receptacle).

**AVAILABLE IN 2' OR 7'**

**NOTE** electrical rating allows up to 10 LBI units connected with linking cables and/or seamless connectors when using the cord w/ plug.



### 12FT 90-DEGREE INCOMING POWER CABLE

RP-LBI-G1-IP-90DEG-12F-DIM



Use the 90 degree Incoming Power Cable for an easy and clean connection to suspended LBI fixtures.

## MOUNTING ACCESSORIES



### SURFACE MOUNT MAGNETIC CLIP

RP-LBI-SMM-10P



The most universal method for attaching the LBI to a wall, ceiling, or fixture.

**NOTE** 2x surface mount magnetic clips included with every LBI




### SUSPENDED IN-LINE BRACKET KIT

RP-LBI-SIL-KIT-10P (10 PACK ONLY)



Fastens over the junction of 2 LBI to keep them straight in-line and provides mounting points for common suspension methods.



### UP/DOWN CLIP

RP-LBI-UDC-10P (10 PACK ONLY)



Use the Up/Down clip with our suspended in-line kit to clip a shorter LBI to provide up-light.




### 45 DEGREE BRACKET/CLIP

RP-LBI-45DEG



Holds the LBI at 45 degrees to better distribute the light in the desired direction.



### T-BAR CLIP

RP-LBI-T1516-10P (10 PACK ONLY)



The fastest way to mount a light bar to a T-Bar grid ceiling. Works with standard 15/16" grid only.