



TYPE C T5/T8 0-10V RETROFIT FOR LINEAR FLUORESCENT LUMINAIRES



LED retrofit kit

RemPhos' Type C T5/T8 0-10V universal retrofit kit for linear fluorescent luminaires is a simple, efficient retrofit solution. Delivers long-term reliability, long life, controllability (standard 0-10V dimmable; Dim-to-Off; 12V Aux Standard) and significant energy savings when compared to fluorescent tubes. Designed to easily retrofit existing T5/T8/T12 linear fluorescent fixtures. Fast, one-person installation.



SIMPLE INSTALLATION

Replace ballast with driver and replace lamps.

MAXIMUM VERSATILITY

Standard lengths along with multiple lamp/driver combinations (1L,2L,3L,4L) provides a fit for any application.

MANY LIGHT OUTPUT CHOICES

Systems available in 6W (800LM) all the way to 80W (11,000LM). See ordering guide for available systems.

STANDARD 10V DIMMABLE DRIVER W/ 12V AUX; DIM TO OFF

VARIOUS CONTINUOUS AND STEP-DIM DRIVER OPTIONS.

We want to help you choose the lowest cost, easiest to implement method to dim our retrofit kits. While low voltage 10V dimming is a great approach, often it requires running new wiring. Therefore, we have line voltage phase dimming driver options, 2-switch step-dim driver options (to work with existing inbound/outbound wall switches), and 1-switch step-dim driver options (using 1 existing wall switch change brightness between pre-selected levels of 50%/100% for example).

METAL, LINEAR BALLAST-SHAPED LED DRIVERS

Rigid metal cases are rugged and easy to mount. Thin height allows a perfect fit into even the most compact existing ballast compartments.

SUITABLE FOR DRY & DAMP LOCATIONS

UL 1598C CLASSIFIED RETROFIT KIT LISTED & PERFORMANCE QPL LISTED

5 YEAR WARRANTY, L70 >50,000HRS

LOWER COST EMERGENCY BATTERY BACKUP

CONTROLS/MOTION SENSORS (OPTIONAL)

Contact our engineering team to help choose the best sensor/control for your application.

T8HO OUTPUT TO MATCH T5HO

Need more light? Try our T8HO 4-foot configurations and skip the switchover to T5HO sockets

FLEXWATT STANDARD

Each driver has 4 adjustable wattage choices. With FlexWatt, there are now significantly more wattage choices to allow you to select exactly what lumen/wattage package is needed to maximize energy savings.

DIM-TO-OFF DRIVERS STANDARD

12V auxiliary power and 10V dimming wires are standard in every kit. Allows for easy interface with dimming switches and control systems.



RemPhos by Light Efficient Design
lighting on target

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949

847.380.3540 • led-llc.com

08.23.22 Information is subject to change without notice.

TYPE C T5/T8 0-10V RETROFIT FOR LINEAR FLUORESCENT LUMINAIRES



DIMMING OPTIONS

10V – Standard driver is controlled with 0-10V wall dimmer or 0-10V advanced control system. (Standard driver has Aux power [12V – 50mA]; Dim-to-Off)


LVD – 120-277V TRIAC / AC Phase cut dimming (Driver) – Traditional AC modulated dimming. Compatible with forward or reverse phase cut dimming. CFL/LED compatible dimmer required.

1STEP – Single Switch Step-Dimming (Module to be used with LBE 10V kits) Quick flip [ON-OFF-ON] to toggle between step dimming. [30% - 60% - 100%]



2STEP – Double Switch Step-Dimming (Driver) Use 2 switches to control dimming steps in logical way. Designed to retrofit fluorescent in-board / out-board set-up. [30% - 60% - 100%]

DIMMING OPTIONS

10V (STANDARD DRIVER) → **0-10V DIM (Dim-to-off)**
(Aux 12V; mA)
(0-10V use with wall dimmer or 0-10V Advanced Control)






LVD (OPTIONAL DRIVER) → **120-277V TRIAC (PHASE CUT)**
(CFL/LED Compatible dimmer required)



1STEP (OPTIONAL CONTROL MODULE) → **SINGLE SWITCH STEP DIM MODULE**
(Use w/ standard LBE control ready driver)
Quick flip [ON-OFF-ON] to toggle between step dimming. [30% - 60% - 100%]



2STEP (OPTIONAL DRIVER) → **2 SWITCH**
(Fluorescent in-board / out-board retrofit)




RemPhos by **Light Efficient Design**
lighting on target

TYPE C T5/T8 0-10V RETROFIT FOR LINEAR FLUORESCENT LUMINAIRES



HOW TO EASILY ADD OCCUPANCY SENSING AND DAYLIGHT CONTROL TO YOUR FIXTURE

Choose one of the control options below which best fits your needs. Any of these options can be easily installed under the existing glass or plastic fixture lens. These controls will allow the LED Barkit to adjust it's light level depending on occupancy or daylight levels, acheiving greater energy savings.

PART #	DETAILS
 HNS 111	Remote mounted antenna can be screwed to outside of ballast cover. Can be mounted behind glass or plastic lens. Adjusts for occupancy and daylight. Optional remote control to adjust settings.

ADVANCED WIRELESS CONTROL



We partner with Magnum, avi-on, Philips, Lutron and other intelligent wireless lighting control systems. Allows for occupancy sensing, daylight harvesting, grouping, scheduling, high-end trim and more. Adjust settings via iPhone/Android apps. Contact us for

CONTACT US FOR ORDERING CODES

*If satisfied with default settings, remote control is not needed. If settings need to be changed, optional remote control (IR12), is required.

KEY PRODUCT INFORMATION

- SIMPLE INSTALLATION
- MAXIMUM VERSATILITY
- MANY LIGHT OUTPUT CHOICES
- CONTROL READY 10V DIMMABLE DRIVER
- SUITABLE FOR DRY & DAMP LOCATIONS
- UL 1598C CLASSIFIED RETROFIT KIT LISTED & PERFORMANCE QPL LISTED
- 5 YEAR WARRANTY, L70 > 50,000HRS
- OPTIONAL "BAA" (ARRA SECTION 1605) BUY AMERICA ACT
- CUSTOM RETROFIT SOLUTIONS AVAILABLE
- OPTIONAL MOTION SENSOR/CONTROL READY



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949

TYPE C T5/T8 0-10V RETROFIT FOR LINEAR FLUORESCENT LUMINAIRES



SPECIFICATION GUIDE

OUTPUT

MODEL	RP-LBE-G2-DRV-12W	RP-LBE-G2-DRV-12W-HV	RP-LBE-G2-DRV-25W	RP-LBE-G2-DRV-25W-HV	RP-LBE-G2-DRV-45W	RP-LBE-G2-DRV-45W-HV	RP-LBE-G2-DRV-80W	RP-LBE-G2-DRV-80W-HV
LED OUTPUT CHANNEL(S)	Single Channel	Single Channel	Single Channel	Single Channel	Single Channel	Single Channel	Single Channel	Single Channel
LED OUTPUT CURRENT - SELECTABLE (MA)	100/150/190/230	100/150/190/230	290/350/390/490	290/350/390/490	580/680/780/880	580/680/780/880	1000/1160/1370/1570	1000/1160/1370/1570
LED DC VOLTAGE RANGE	30-48V	30-48V	30-48V	30-48V	30-48V	30-48V	30-48V	30-48V
RATED POWER (MAX)	12W	12W	25W	25W	45W	45W	80W	80W
AUX VOLTAGE SOURCE	12V/50mA	12V/50mA	12V/50mA	12V/50mA	12V/50mA	12V/50mA	12V/50mA	12V/50mA

INPUT




VOLTAGE RANGE	120-277VAC	120-347VAC	120-277VAC	120-347VAC	120-277VAC	120-347VAC	120-277VAC	120-347VAC
FREQUENCY RANGE	50~60HZ							
POWER FACTOR (TYP)	>0.9							
AC CURRENT (MAX)	0.15A @ 120V	0.15A @ 120V	0.22 @ 120V	0.22 @ 120V	0.38 @ 120V	0.38 @ 120V	0.70 @ 120V	0.70 @ 120V
LEAKAGE CURRENT	<0.75mA							
INRUSH CURRENT	50A @ 277V							
THD	<0.20							

PROTECTION

OVER CURRENT	105~125% Protection type: Shut down output voltage
LED SHORT CIRCUIT	A short condition on any of output shall cause no damage to the power supply. The unit shall recover and function automatically as soon as the short condition is removed.
LED OPEN CIRCUIT	An open condition on any of output shall cause no damage to the power supply. The unit shall recover and function automatically as soon as the open condition is removed.
OVER VOLTAGE	105~125% Protection type: Shut down output voltage
SAFTEY	UL8750 CLASS 2 CLASS P

ENVIRONMENT


WORKING TEMP	-20C to 50C
WORKING HUMIDITY	< 90% RH
STORAGE TEMP	-20C to 80C
STORAGE HUMIDITY	< 90% RH
TEMP COEFFICIENT	0.03%/°C (0~40°C)
VIBRATION	10~500Hz, 2G 12Min / 1 cycle, period for 72min each along X, Y, Z axes

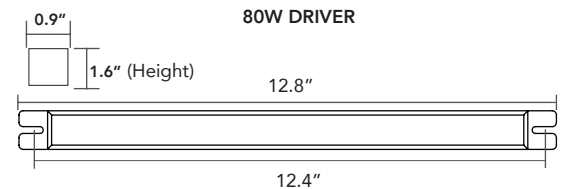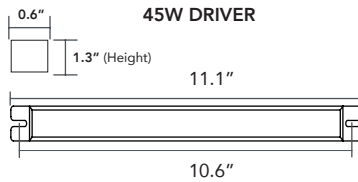

TYPE C T5/T8 0-10V RETROFIT FOR LINEAR FLUORESCENT LUMINAIRES



EASILY RETROFIT THESE FIXTURE STYLES, AND MORE!

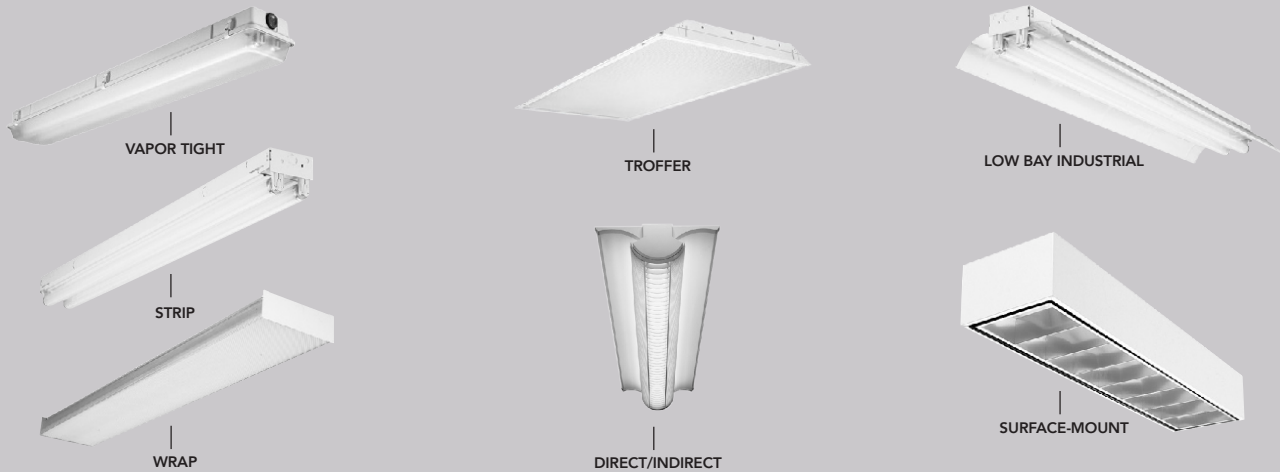

ORDERING DIRECTIONS (SEE ORDERING GUIDE ON NEXT PAGE)

- A) Choose your desired total system wattage and lumen output.
- B) Choose your desired lamp length type (T5 or T8), (2, 3 or 4FT) and QTY per driver.
- C) Order system part # (a system will include 1pc LED driver + lamp(s). Substitute "XX" in the 8XX for your desired CCT. 30 (3000K), 35 (3500K), 40 (4000K) and 50 (5000K) are available color temps.

STANDARD COLOR TEMPS AVAILABLE

3000K, 3500K, 4000K, 5000K

If the system you want is not currently a listed part #, please contact us for a letter to send to your Utility for custom incentive approval.

CAUTION! MAX WATTAGE SETTING PER LAMP

	T5	T8
2FT:	15	10
3FT:	15	12
4FT:	25	25

If you require BAA (ARRA Section 1605) add -AA at end of part number

-For BAA projects contact our projects quotation team.

ORDERING EXAMPLE

A 20W/2900LM system is desired utilizing 2pcs of 2FT T8 lamp in 4000K running off 1pc of driver. For this system you would order:

SYSTEM: **RP-T8C-G2-20W-2FT-2L-840-10V** (All kits include driver)

TOTAL SYSTEM WATTAGE: **20W**

TOTAL SYSTEM LUMEN OUTPUT: **2900LM**

LENGTH OF T8 LAMP: **2FT**

OF LAMPS: **2pcs**

WATTAGE PER LAMP: **10W**

LUMENS PER LAMP: **1450LM**

PERFORMANCE LISTED KIT PART #: **RP-T8C-G2-20W-2FT-2L-840-10V**

PERFORMANCE QPL PRODUCT CODE: XXXXXX

PART NUMBER BUILDER

MFR	PRODUCT	GENERATION	WATTAGE	LENGTH	# OF LAMPS	COLOR	DIMMING	OPTIONS
RP		G2	W			8XX		
	T5C T8C		6 8 10 12 15 18 20 25 30 35 40 45 50 60 70 80	2FT 3FT 4FT	1L 2L 3L 4L	8 = 80+ CRI XX = CCT 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K	10V LVD 1 Step 2 Step	EMG HV (120-347V) AA (ARRA SECTION 1605)

RemPhos by **Light Efficient Design**
lighting on target

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com
08.23.22 Information is subject to change without notice.

TYPE C T5/T8 0-10V RETROFIT FOR LINEAR FLUORESCENT LUMINAIRES



ORDERING GUIDE

	PART #	LAMPS PER DRIVER	LAMP LENGTH (FT)	TOTAL LUMENS*	PERFORMANCE CATEGORY	PRODUCT ID	
6W	T5	RP-T5C-G2-6W-2FT-1L-8XX-10V	1	2	792		
		RP-T5C-G2-6W-3FT-1L-8XX-10V	1	3	792		
		RP-T5C-G2-6W-4FT-1L-8XX-10V	1	4	846	Linear Replacement Lamp	PSU1XAAX
	T8	RP-T8C-G2-6W-2FT-1L-8XX-10V	1	2	864		
		RP-T8C-G2-6W-3FT-1L-8XX-10V	1	3	828		
		RP-T8C-G2-6W-4FT-1L-8XX-10V	1	4	858		
8W	T5	RP-T5C-G2-8W-2FT-1L-8XX-10V	1	2	1056		
		RP-T5C-G2-8W-3FT-1L-8XX-10V	1	3	1056		
		RP-T5C-G2-8W-4FT-1L-8XX-10V	1	4	1128	Linear Replacement Lamp	P0G1ZF00
	T8	RP-T8C-G2-8W-2FT-1L-8XX-10V	1	2	1152		
		RP-T8C-G2-8W-3FT-1L-8XX-10V	1	3	1104		
		RP-T8C-G2-8W-4FT-1L-8XX-10V	1	4	1144		
10W	T5	RP-T5C-G2-10W-2FT-1L-8XX-10V	1	2	1320		
		RP-T5C-G2-10W-2FT-2L-8XX-10V	2	2	1320		
		RP-T5C-G2-10W-3FT-1L-8XX-10V	1	3	1320		
		RP-T5C-G2-10W-4FT-1L-8XX-10V	1	4	1410	Linear Replacement Lamp	PYLSLE54
	T8	RP-T8C-G2-10W-2FT-1L-8XX-10V	1	2	1440	Linear Replacement Lamp	PTOD0FV7
		RP-T8C-G2-10W-2FT-2L-8XX-10V	2	2	1440		
		RP-T8C-G2-10W-3FT-1L-8XX-10V	1	3	1380	Linear Replacement Lamp	P18RG4JG
		RP-T8C-G2-10W-4FT-1L-8XX-10V	1	4	1430	Linear Replacement Lamp	PSRGGRLJ
12W	T5	RP-T5C-G2-12W-2FT-1L-8XX-10V	1	2	1584		
		RP-T5C-G2-12W-2FT-2L-8XX-10V	2	2	1584		
		RP-T5C-G2-12W-2FT-3L-8XX-10V	3	2	1584		
		RP-T5C-G2-12W-3FT-1L-8XX-10V	1	3	1584		
		RP-T5C-G2-12W-3FT-2L-8XX-10V	2	3	1584		
		RP-T5C-G2-12W-4FT-1L-8XX-10V	1	4	1692	Linear Replacement Lamp	PC1TFVRX
	T8	RP-T5C-G2-12W-4FT-2L-8XX-10V	2	4	1692		
		RP-T8C-G2-12W-2FT-2L-8XX-10V	2	2	1728		
		RP-T8C-G2-12W-2FT-3L-8XX-10V	3	2	1728		
		RP-T8C-G2-12W-3FT-1L-8XX-10V	1	3	1656	Linear Replacement Lamp	PJREDVOQ
		RP-T8C-G2-12W-3FT-2L-8XX-10V	2	3	1656		
		RP-T8C-G2-12W-4FT-1L-8XX-10V	1	4	1716	Linear Replacement Lamp	PN4HJSK6
15W	T5	RP-T8C-G2-12W-4FT-2L-8XX-10V	2	4	1716		
		RP-T5C-G2-15W-2FT-2L-8XX-10V	2	2	1980		
		RP-T5C-G2-15W-2FT-3L-8XX-10V	3	2	1980		
		RP-T5C-G2-15W-3FT-1L-8XX-10V	1	3	1980		
		RP-T5C-G2-15W-3FT-2L-8XX-10V	2	3	1980		
		RP-T5C-G2-15W-3FT-3L-8XX-10V	3	3	1980		
		RP-T5C-G2-15W-4FT-1L-8XX-10V	1	4	2115	Linear Replacement Lamp	P7HH186E
	T8	RP-T5C-G2-15W-4FT-2L-8XX-10V	2	4	2115	Linear Replacement Lamp	PGKJ1W0E
		RP-T8C-G2-15W-2FT-2L-8XX-10V	2	2	2160	Linear Replacement Lamp	P0Y6WGAY
		RP-T8C-G2-15W-2FT-3L-8XX-10V	3	2	2160	Linear Replacement Lamp	PNKI6F1A
		RP-T8C-G2-15W-3FT-2L-8XX-10V	2	3	2070	Linear Replacement Lamp	P34ES8HW
		RP-T8C-G2-15W-3FT-3L-8XX-10V	3	3	2070		
		RP-T8C-G2-15W-4FT-1L-8XX-10V	1	4	2145	Linear Replacement Lamp	PAME40W7
		RP-T8C-G2-15W-4FT-2L-8XX-10V	2	4	2145	Linear Replacement Lamp	P0ULYY6K

*TOTAL LUMENS is calculated based on Remphos 0-10V driver and 4000K lamp design parameters. Actual lumen output will vary depending on lamp color and driver used. Reference DLC performance data where available for measured performance.



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
 847.380.3540 • led-llc.com

TYPE C T5/T8 0-10V RETROFIT FOR LINEAR FLUORESCENT LUMINAIRES



ORDERING GUIDE

	PART #	LAMPS PER DRIVER	LAMP LENGTH (FT)	TOTAL LUMENS*	PERFORMANCE CATEGORY	PRODUCT ID		
18W	T5	RP-T5C-G2-18W-2FT-2L-8XX-10V	2	2	2376			
		RP-T5C-G2-18W-2FT-3L-8XX-10V	3	2	2376			
		RP-T5C-G2-18W-2FT-4L-8XX-10V	4	2	2376			
		RP-T5C-G2-18W-3FT-2L-8XX-10V	2	3	2376			
		RP-T5C-G2-18W-3FT-3L-8XX-10V	3	3	2376			
		RP-T5C-G2-18W-3FT-4L-8XX-10V	4	3	2376			
		RP-T5C-G2-18W-4FT-1L-8XX-10V	1	4	2538	Linear Replacement Lamp	PE6WJZH9	
		RP-T5C-G2-18W-4FT-2L-8XX-10V	2	4	2538	Linear Replacement Lamp	PS9GH1M0	
		RP-T5C-G2-18W-4FT-3L-8XX-10V	3	4	2538			
	T8	RP-T8C-G2-18W-2FT-2L-8XX-10V	2	2	2592	Linear Replacement Lamp	PSKG5FTR	
		RP-T8C-G2-18W-2FT-3L-8XX-10V	3	2	2592	Linear Replacement Lamp	PQOHLMSV	
		RP-T8C-G2-18W-2FT-4L-8XX-10V	4	2	2592			
		RP-T8C-G2-18W-3FT-2L-8XX-10V	2	3	2484	Linear Replacement Lamp	PD4EVJKY	
		RP-T8C-G2-18W-3FT-3L-8XX-10V	3	3	2484			
		RP-T8C-G2-18W-3FT-4L-8XX-10V	4	3	2484			
		RP-T8C-G2-18W-4FT-1L-8XX-10V	1	4	2574	Linear Replacement Lamp	P9V8EGB5	
		RP-T8C-G2-18W-4FT-2L-8XX-10V	2	4	2574	Linear Replacement Lamp	PQ8MWLRF	
		RP-T8C-G2-18W-4FT-3L-8XX-10V	3	4	2574			
20W	T5	RP-T5C-G2-20W-2FT-2L-8XX-10V	2	2	2640			
		RP-T5C-G2-20W-2FT-3L-8XX-10V	3	2	2640			
		RP-T5C-G2-20W-2FT-4L-8XX-10V	4	2	2640			
		RP-T5C-G2-20W-3FT-2L-8XX-10V	2	3	2640			
		RP-T5C-G2-20W-3FT-3L-8XX-10V	3	3	2640			
		RP-T5C-G2-20W-3FT-4L-8XX-10V	4	3	2640			
		RP-T5C-G2-20W-4FT-1L-8XX-10V	1	4	2820	Linear Replacement Lamp	PHNGEBBI	
		RP-T5C-G2-20W-4FT-2L-8XX-10V	2	4	2820	Linear Replacement Lamp	PZXWF3IN	
		RP-T5C-G2-20W-4FT-3L-8XX-10V	3	4	2820			
	T8	RP-T8C-G2-20W-2FT-2L-8XX-10V	2	2	2880	Linear Replacement Lamp	P1UJKB7U	
		RP-T8C-G2-20W-2FT-3L-8XX-10V	3	2	2880	Linear Replacement Lamp	POBZR5UY	
		RP-T8C-G2-20W-2FT-4L-8XX-10V	4	2	2880			
		RP-T8C-G2-20W-3FT-2L-8XX-10V	2	3	2760	Linear Replacement Lamp	PJS3YW2O	
		RP-T8C-G2-20W-3FT-3L-8XX-10V	3	3	2760			
		RP-T8C-G2-20W-3FT-4L-8XX-10V	4	3	2760			
		RP-T8C-G2-20W-4FT-1L-8XX-10V	1	4	2860	Linear Replacement Lamp	PKF5N4M1	
		RP-T8C-G2-20W-4FT-2L-8XX-10V	2	4	2860	Linear Replacement Lamp	PBOQYZQT	
		RP-T8C-G2-20W-4FT-3L-8XX-10V	3	4	2860			
25W	T5	RP-T5C-G2-25W-2FT-2L-8XX-10V	2	2	3300			
		RP-T5C-G2-25W-2FT-3L-8XX-10V	3	2	3300			
		RP-T5C-G2-25W-2FT-4L-8XX-10V	4	2	3300			
		RP-T5C-G2-25W-3FT-2L-8XX-10V	2	3	3300			
		RP-T5C-G2-25W-3FT-3L-8XX-10V	3	3	3300			
		RP-T5C-G2-25W-3FT-4L-8XX-10V	4	3	3300			
		RP-T5C-G2-25W-4FT-2L-8XX-10V	2	4	3525	Linear Replacement Lamp	PJ46QOQT	
		RP-T5C-G2-25W-4FT-3L-8XX-10V	3	4	3525			
		RP-T5C-G2-25W-4FT-4L-8XX-10V	4	4	3525			
	T8HO	RP-T5CHO-G2-25W-4FT-1L-8XX-10V	1	4	3525	Linear Replacement Lamp	PWW3R9HQ	
		T8	RP-T8C-G2-25W-2FT-3L-8XX-10V	3	2	3600	Linear Replacement Lamp	P914ZOB9
			RP-T8C-G2-25W-2FT-4L-8XX-10V	4	2	3600		
			RP-T8C-G2-25W-3FT-2L-8XX-10V	2	3	3450	Linear Replacement Lamp	PW8MHLAP
			RP-T8C-G2-25W-3FT-3L-8XX-10V	3	3	3450		
			RP-T8C-G2-25W-3FT-4L-8XX-10V	4	3	3450		
			RP-T8C-G2-25W-4FT-1L-8XX-10V	1	4	3575	Linear Replacement Lamp	P4M6Z360
			RP-T8C-G2-25W-4FT-2L-8XX-10V	2	4	3575	Linear Replacement Lamp	P6YYODFR
			RP-T8C-G2-25W-4FT-3L-8XX-10V	3	4	3575		
RP-T8C-G2-25W-4FT-4L-8XX-10V	4		4	3575				

*TOTAL LUMENS is calculated based on Remphos 0-10V driver and 4000K lamp design parameters. Actual lumen output will vary depending on lamp color and driver used. Reference DLC performance data where available for measured performance.



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949

TYPE C T5/T8 0-10V RETROFIT FOR LINEAR FLUORESCENT LUMINAIRES



ORDERING GUIDE

	PART #	LAMPS PER DRIVER	LAMP LENGTH (FT)	TOTAL LUMENS*	PERFORMANCE CATEGORY	PREODUCT ID	
30W	T5	RP-T5C-G2-30W-2FT-3L-8XX-10V	3	2	3960		
		RP-T5C-G2-30W-2FT-4L-8XX-10V	4	2	3960		
		RP-T5C-G2-30W-3FT-3L-8XX-10V	3	3	3960		
		RP-T5C-G2-30W-3FT-4L-8XX-10V	4	3	3960		
		RP-T5C-G2-30W-4FT-2L-8XX-10V	2	4	4230	Linear Replacement Lamp	P3V365NG
		RP-T5C-G2-30W-4FT-3L-8XX-10V	3	4	4230	Linear Replacement Lamp	PJO4LIRF
	T8	RP-T5C-G2-30W-4FT-4L-8XX-10V	4	4	4230	Linear Replacement Lamp	PNOYCPX4
		RP-T8C-G2-30W-2FT-3L-8XX-10V	3	2	4320	Linear Replacement Lamp	PS9ZRYRE
		RP-T8C-G2-30W-2FT-4L-8XX-10V	4	2	4320		
		RP-T8C-G2-30W-3FT-3L-8XX-10V	3	3	4140		
		RP-T8C-G2-30W-3FT-4L-8XX-10V	4	3	4140		
		RP-T8C-G2-30W-4FT-2L-8XX-10V	2	4	4290	Linear Replacement Lamp	P7ARL0GB
		RP-T8C-G2-30W-4FT-3L-8XX-10V	3	4	4290	Linear Replacement Lamp	PLK35YRB
		RP-T8C-G2-30W-4FT-4L-8XX-10V	4	4	4290	Linear Replacement Lamp	PC7RKHDT
35W	T5	RP-T5C-G2-35W-2FT-3L-8XX-10V	3	2	4620		
		RP-T5C-G2-35W-2FT-4L-8XX-10V	4	2	4620		
		RP-T5C-G2-35W-3FT-3L-8XX-10V	3	3	4620		
		RP-T5C-G2-35W-3FT-4L-8XX-10V	4	3	4620		
		RP-T5C-G2-35W-4FT-2L-8XX-10V	2	4	4935	Linear Replacement Lamp	PPROU3H2
		RP-T5C-G2-35W-4FT-3L-8XX-10V	3	4	4935	Linear Replacement Lamp	P1A0FIJD
	T8	RP-T5C-G2-35W-4FT-4L-8XX-10V	4	4	4935	Linear Replacement Lamp	P9LAPB11
		RP-T8C-G2-35W-2FT-4L-8XX-10V	4	2	5040		
		RP-T8C-G2-35W-3FT-3L-8XX-10V	3	3	4830		
		RP-T8C-G2-35W-3FT-4L-8XX-10V	4	3	4830		
		RP-T8C-G2-35W-4FT-2L-8XX-10V	2	4	5005	Linear Replacement Lamp	P8VCQI3I
		RP-T8C-G2-35W-4FT-3L-8XX-10V	3	4	5005	Linear Replacement Lamp	PP24KC58
RP-T8C-G2-35W-4FT-4L-8XX-10V	4	4	5005	Linear Replacement Lamp	PZM1FLCD		
40W	T5	RP-T5C-G2-40W-2FT-4L-8XX-10V	4	2	5280		
		RP-T5C-G2-40W-3FT-4L-8XX-10V	4	3	5280		
		RP-T5C-G2-40W-4FT-2L-8XX-10V	2	4	5640	Linear Replacement Lamp	P6661877
		RP-T5C-G2-40W-4FT-3L-8XX-10V	3	4	5640	Linear Replacement Lamp	PDH3WJCR
		RP-T5C-G2-40W-4FT-4L-8XX-10V	4	4	5640	Linear Replacement Lamp	P96RR5G1
	T8	RP-T8C-G2-40W-2FT-4L-8XX-10V	4	2	5760		
		RP-T8C-G2-40W-3FT-4L-8XX-10V	4	3	5520		
		RP-T8C-G2-40W-4FT-2L-8XX-10V	2	4	5720	Linear Replacement Lamp	PADCVMA3
		RP-T8C-G2-40W-4FT-3L-8XX-10V	3	4	5720	Linear Replacement Lamp	P5TWEJC2
		RP-T8C-G2-40W-4FT-4L-8XX-10V	4	4	5720	Linear Replacement Lamp	PRIJ6XKL
45W	T5	RP-T5C-G2-45W-2FT-4L-8XX-10V	4	2	5940		
		RP-T5C-G2-45W-3FT-4L-8XX-10V	4	3	5940		
		RP-T5C-G2-45W-4FT-3L-8XX-10V	3	4	6345	Linear Replacement Lamp	PL1BVBQV
		RP-T5C-G2-45W-4FT-4L-8XX-10V	4	4	6345	Linear Replacement Lamp	POQGNNAG
	T5HO	RP-T5CHO-G2-45W-4FT-2L-8XX-10V	2	4	6345		
	T8	RP-T8C-G2-45W-3FT-4L-8XX-10V	4	3	6210		
		RP-T8C-G2-45W-4FT-2L-8XX-10V	2	4	6435	Linear Replacement Lamp	PG52F5XF
		RP-T8C-G2-45W-4FT-3L-8XX-10V	3	4	6435	Linear Replacement Lamp	P9DOU67M
		RP-T8C-G2-45W-4FT-4L-8XX-10V	4	4	6435	Linear Replacement Lamp	POMOA0GS

*TOTAL LUMENS is calculated based on Remphos 0-10V driver and 4000K lamp design parameters. Actual lumen output will vary depending on lamp color and driver used. Reference DLC performance data where available for measured performance.



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949

847.380.3540 • led-llc.com

08.23.22 Information is subject to change without notice.

TYPE C T5/T8 0-10V RETROFIT FOR LINEAR FLUORESCENT LUMINAIRES



ORDERING GUIDE

	PART #	LAMPS PER DRIVER	LAMP LENGTH (FT)	TOTAL LUMENS*	PERFORMANCE CATEGORY	PRODUCT ID	
50W	T5	RP-T5C-G2-50W-4FT-3L-8XX-10V	3	4	7050	Linear Replacement Lamp	PHLYSFJI
		RP-T5C-G2-50W-4FT-4L-8XX-10V	4	4	7050	Linear Replacement Lamp	PJRRAWPI
	T8	RP-T5CHO-G2-50W-4FT-2L-8XX-10V	2	4	7050		
		RP-T8C-G2-50W-4FT-2L-8XX-10V	2	4	7150		
		RP-T8C-G2-50W-4FT-3L-8XX-10V	3	4	7150	Linear Replacement Lamp	PWTE7PXD
		RP-T8C-G2-50W-4FT-4L-8XX-10V	4	4	7150	Linear Replacement Lamp	P9OSGNG4
60W	T5	RP-T5C-G2-60W-4FT-3L-8XX-10V	3	4	8460	Linear Replacement Lamp	PL94VKEJ
		RP-T5C-G2-60W-4FT-4L-8XX-10V	4	4	8460	Linear Replacement Lamp	P6KYMSGR
	T8	RP-T8C-G2-60W-4FT-3L-8XX-10V	3	4	8580	Linear Replacement Lamp	P5EHIOVU
		RP-T8C-G2-60W-4FT-4L-8XX-10V	4	4	8580	Linear Replacement Lamp	PY0E9CIC
70W	T5	RP-T5C-G2-70W-4FT-3L-8XX-10V	3	4	9870	Linear Replacement Lamp	PEUKYUD7
		RP-T5C-G2-70W-4FT-4L-8XX-10V	4	4	9870	Linear Replacement Lamp	PM48QPJ0
	T8	RP-T8C-G2-70W-4FT-3L-8XX-10V	3	4	10010	Linear Replacement Lamp	PKBJXTGD
		RP-T8C-G2-70W-4FT-4L-8XX-10V	4	4	10010	Linear Replacement Lamp	PQYI5Q1M
80W	T5	RP-T5C-G2-80W-4FT-4L-8XX-10V	3	4	11280	Linear Replacement Lamp	PWIMCKF7
		RP-T5CHO-G2-80W-4FT-3L-8XX-10V	4	4	11280	Linear Replacement Lamp	P5PECOA2
	T8	RP-T8C-G2-80W-4FT-3L-8XX-10V	3	4	11440	Linear Replacement Lamp	PTCSAT7R
		RP-T8C-G2-80W-4FT-4L-8XX-10V	4	4	11440	Linear Replacement Lamp	P5RF25CW

*TOTAL LUMENS is calculated based on Remphos 0-10V driver and 4000K lamp design parameters. Actual lumen output will vary depending on lamp color and driver used. Reference DLC performance data where available for measured performance.