

COLOR PALETTE x RemPhos®

**LBI PALETTE — OUR LINKABLE BAR W/ AN INTERNAL DRIVER
DELIVERING PRECISION WAVELENGTH SELECTION**




CORPORATE HQ & TRAINING CENTER • CARY, IL | INNOVATION & MANUFACTURING CENTER • Middleton, MA
847.380.3540 • led-llc.com • sales@led-llc.com

* CONNECT UP TO 30 4 FT UNITS TOGETHER @ 120VAC OR 40 4 FT UNITS @ 277VAC.

VIOLET LIGHT IS USED IN APPLICATIONS TO GENERATE ENHANCED CONTRAST OR DYNAMIC DISPLAYS AND ENVIRONMENTS

AMBER LIGHT IS USED IN APPLICATIONS WHERE PHOTOCHEMICAL SENSITIVITY, GLARE REDUCTION OR WAVELENGTH-SPECIFIC SIGNALING IS IMPORTANT


RED LIGHT IS USED IN APPLICATIONS FOR REDUCING EYE STRAIN, INCREASING BIOLOGICAL STIMULATION OR WAVELENGTH-SPECIFIC VISIBILITY

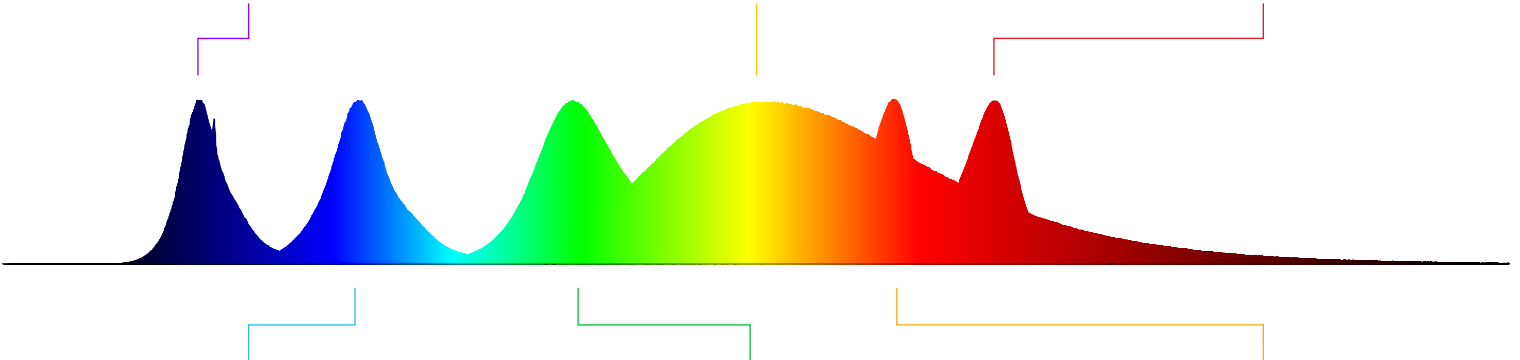

BLUE LIGHT IS COMMON IN APPLICATIONS TO CREATE SOOTHING ATMOSPHERES, HIGH-CONTRAST VISIBILITY OR SUBTLE DISPLAYS

GREEN LIGHT IS USED IN APPLICATIONS WHERE ENHANCED CONTRAST SENSITIVITY, VISUAL CLARITY OR PRECISE COLOR RENDERING IS REQUIRED

ORANGE LIGHT IS USED IN APPLICATIONS FOR CLEAR SIGNALING, HIGH VISIBILITY OR WAVELENGTH-SPECIFIC ILLUMINATION



PART #	LUMENS	WATTAGE	CCT	DIMENSIONS
RP-LBI-G2-2F-6W-RED-WC-ORG	375-600	FLEXWATT 6W/9W/12W	RED	19.3" x 1.2" x 1.2"
RP-LBI-G2-2F-6W-RED-WC-ORG			ORANGE	
RP-LBI-G2-2F-6W-AMB-WC-GRN	1175-2125		AMBER	
RP-LBI-G2-2F-6W-AMB-WC-GRN			GREEN	
RP-LBI-G2-2F-6W-BLU-WC-VLT	15-300		BLUE	
RP-LBI-G2-2F-6W-BLU-WC-VLT			VIOLET	
RP-LBI-G2-4F-25W-RED-WC-ORG	750-1200	FLEXWATT 10W/15W/25W	RED	43.3" x 1.2" x 1.2"
RP-LBI-G2-4F-25W-RED-WC-ORG			ORANGE	
RP-LBI-G2-4F-25W-AMB-WC-GRN	2350-4250		AMBER	
RP-LBI-G2-4F-25W-AMB-WC-GRN			GREEN	
RP-LBI-G2-4F-25W-BLU-WC-VLT	30-600		BLUE	
RP-LBI-G2-4F-25W-BLU-WC-VLT			VIOLET	



LBI 65 PALETTE IS ALSO OFFERED FOR IP65-RATED AND NSF-CERTIFIED APPLICATIONS
CONTACT YOUR REP FOR PART NUMBERS AND ORDERING INFORMATION