


The kitchen sink of T8s



GLASS
CONSTRUCTION

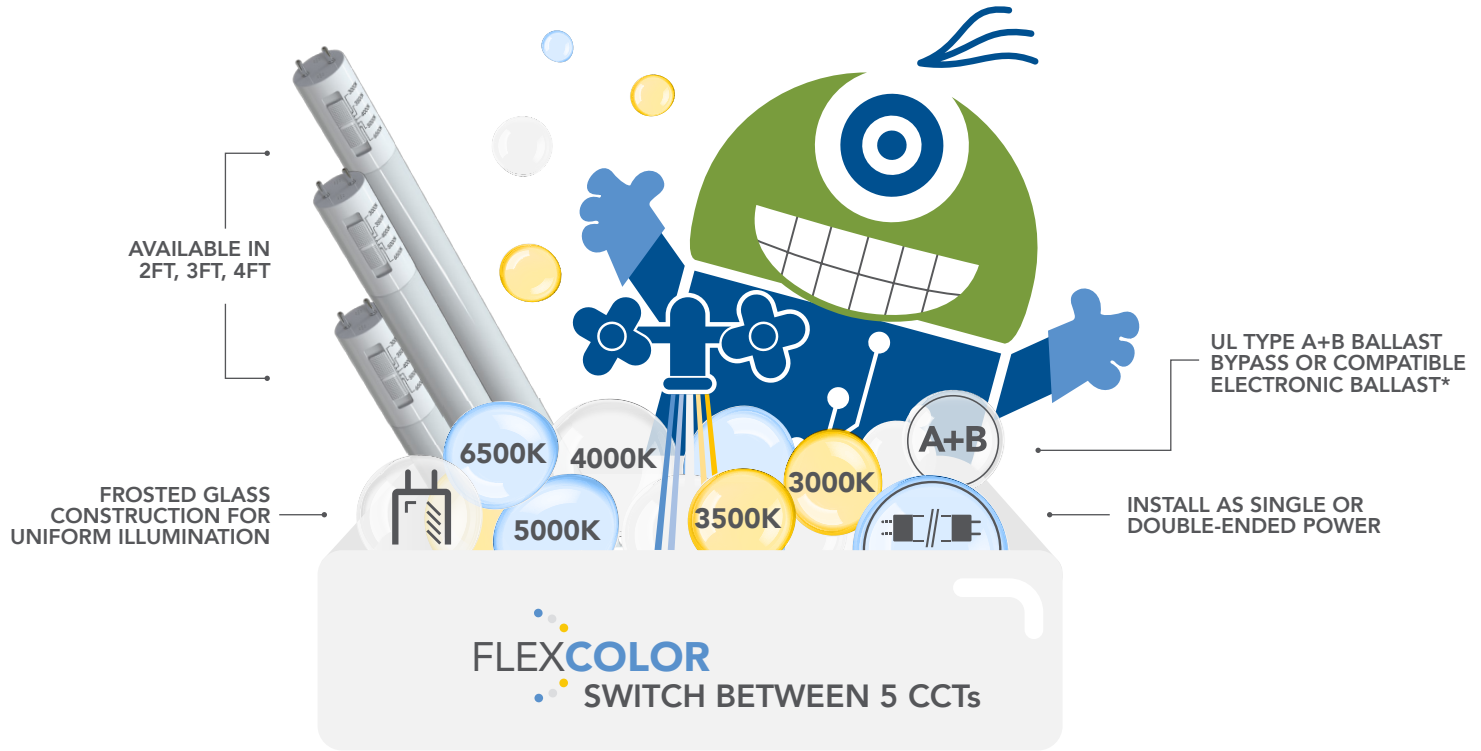

CRI



LIGHT
DISTRIBUTION



BALLAST BYPASS
OR COMPATIBLE
ELECTRONIC BALLAST*



SINGLE OR
DOUBLE-ENDED



OPERATING TEMP




BEAM ANGLE



50,000hrs
RATED LIFE

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT	BASE	DIMENSIONS	DLC CODE
LED-10T8-FCAB24-G4	197810005988	17W	10W	1450	FLEXCOLOR 3000K/3500K/ 4000K/5000K/ 6500K	G13	24.0" x 1.0"	S-7MG7GF
LED-11T8-FCAB36-G4	197810005995	25W	11W	1650			36.0" x 1.0"	S-RDX5L5
LED-12T8-FCAB48-G4	197810006008	32W	12W	1800			48.0" x 1.0"	S-6GRHYK
LED-15T8-FCAB48-G4	197810006015		15W	2200				S-J0PGVS

* LAMP IS COMPATIBLE WITH CERTAIN INSTANT START BALLASTS. PLEASE VERIFY COMPATIBILITY PRIOR TO INSTALLATION. DEFAULT CCT FOR FLEXCOLOR IS SHOWN IN BOLD..



PART #	DESCRIPTION
LED-EMG-05WCP	5W / OPTIONAL EMERGENCY BATTERY BACKUP (SOLD SEPARATELY)
LED-EMG-10WCP	10W / OPTIONAL EMERGENCY BATTERY BACKUP (SOLD SEPARATELY)

