




THE LBI 65 PALETTE IS AN IP65-RATED LINKABLE LED BAR W/ AN INTERNAL DRIVER DELIVERING PRECISION WAVELENGTH SELECTION. Liquid-tight end caps and waterproof linking — connect up to 40 bars from one feed.* With the same seamless, vapor-tight linking technology as our traditional LBI 65.



AMBER LIGHT IS USED WHEN PHOTOCHEMICAL SENSITIVITY, GLARE REDUCTION OR WAVELENGTH-SPECIFIC SIGNALING IS VITAL — ILLUMINATE YOUR LABORATORIES AND MANUFACTURING FACILITIES W/ THE **AMBER** LBI 65.

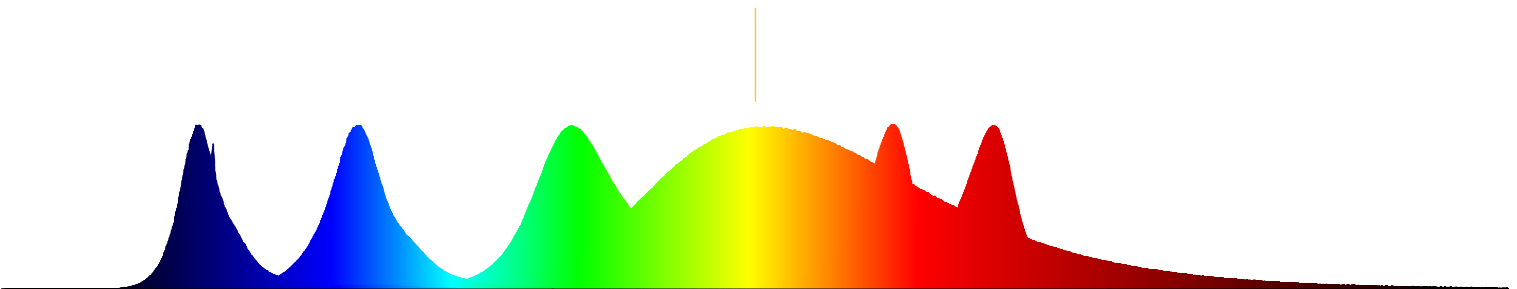

240-347V FOR CANADA ONLY



PWR FACTOR/THD



SENSOR READY



OPTIONAL NETWORK LIGHTING CONTROL



OPTIONAL SIMPLE OCC



BEAM ANGLE



OPTIONAL EMG BATTERY BACKUP



OPERATING TEMP
-13°F TO 140°F

PART #	LUMENS	WATTAGE	CCT	DIMENSIONS
RP-LBI65-2F-6W-AMB-WC-GRN	1175-2125	FLEXWATT 4W/ 6W /9W/12W	AMBER / GREEN	20.7" x 1.6" x 1.7"
RP-LBI65-4F-25W-AMB-WC-GRN	2350-4250	FLEXWATT 10W/15W/20W/ 25W		43.3" x 1.6" x 1.7"

FACTORY SET WATTAGE AND CCT ARE SHOWN IN BOLD (EACH BAR CONTAINS 2 COLOR OPTIONS)

* CONNECT UP TO 30 4 FT UNITS TOGETHER @ 120VAC OR 40 4 FT UNITS @ 277VAC.

THE LISTED APPLICATIONS ARE PROVIDED IN GOOD FAITH BASED ON COMMON PRACTICES AS DERIVED FROM OUR RESEARCH AND PROFESSIONAL INPUT FROM CUSTOMERS. FOR HEALTH AND SAFETY APPLICATIONS FOR YOUR BUILDING AND/OR PERSONAL USE, ALWAYS CONSULT EXPERTS AND DO RESEARCH TO DETERMINE IF THIS IS THE CORRECT SOLUTION FOR YOU PRIOR TO PURCHASING. WE ARE NOT RESPONSIBLE FOR MISAPPLICATION.

HEADQUARTERS & TRAINING CENTER • Cary, IL | INNOVATION & MANUFACTURING CENTER • Middleton, MA

847.380.3540 • led-llc.com • sales@led-llc.com

08.31.26 Information is subject to change without notice.

Light Efficient Design.



8 SKUs in 1 WITH FLEXWATT™ & COLOR PALETTE TECHNOLOGY (CONTROLLABLE FROM REMOTE)




2 FT

Color 1	AMBER	Color 2	GREEN
PW1	4W	PW2	6W
PW3	9W	PW4	12W

4 FT

Color 1	AMBER	Color 2	GREEN
PW1	10W	PW2	15W
PW3	20W	PW4	25W

SPECTRUM CHART

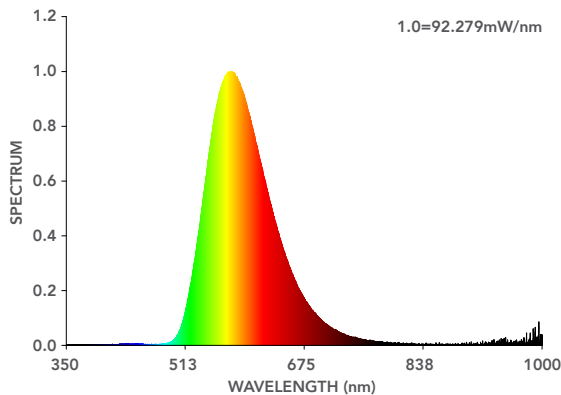

COLOR PARAMETERS

CHROMATICITY COORDINATE

$x=0.4901$ $y=0.5006$ $u'=0.2442$ $v'=0.5613$

DOMINANT WL

$\lambda_d=577.3nm$ Purity=97.5%

RATIO

R=17.0% G=82.9% B=0.1%

PEAK WL

$\lambda_p=576.9nm$ FWHM=95.3nm

RENDER INDEX

$R_a=42.5$ CRI=33.1 AvgR=32.8

R1=38 R2=57 R3=62 R4=26 R5=34

R6=39 R7=65 R8=19 R9=0 R10=3


R11=0 R12=0 R13=40 R14=80 R15=30

ELECTRICAL PARAMETERS

V=223.00V I=0.1919A P=25.70W PF=0.9900

PHOTO PARAMETERS

FLUX=4247lm EFFICACY=165.24lm/W FE=9.755W

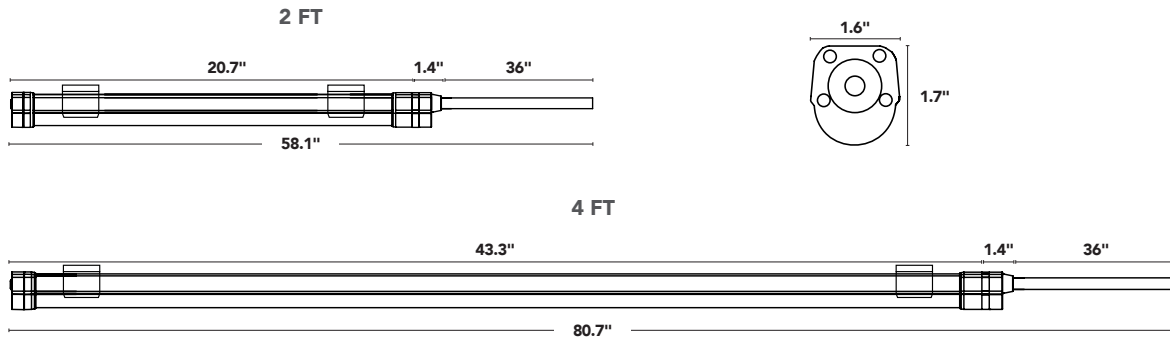

INCLUDED HARDWARE

REMOTE CONTROLLER




2 STAINLESS STEEL, SELF-TAPPING SCREWS



2 MOUNTING BRACKETS (45° AND 90° MOUNTING)



SHIPS W/ A WATERPROOF END CAP INSTALLED 1-WAY MOISTURE VALVE



CONTROL OPTIONS

SIMPLE LIGHTING CONTROL



RP-LBI65-PIR-A

IP65 IN-LINE PASSIVE INFRARED OCCUPANCY
AND DAYLIGHT HARVESTING SENSOR
IR23 REMOTE*




NETWORK LIGHTING CONTROLS



RP-LBI65-BLE-PIR-A

IP65 IN-LINE SILVAIR™ BLUETOOTH PASSIVE INFRARED
MOTION AND DAYLIGHT HARVESTING SENSOR



RP-LBI65-BLE-A

IP65 IN-LINE SILVAIR™
BLUETOOTH CONTROL NODE



CONTROL INCLUDED HARDWARE

2 SEAMLESS CONNECTORS




2 STAINLESS STEEL, SELF-TAPPING SCREWS



1 MOUNTING BRACKET (45° AND 90° MOUNTING)



SHIPS W/ A WATERPROOF END CAP INSTALLED 1-WAY MOISTURE VALVE





CABLES + CONNECTORS

PART #				DESCRIPTION	
6-INCH	12-INCH	24-INCH	48-INCH	LINKING CABLES	
RP-LBI65-LC-6IN-DIM	RP-LBI65-LC-12IN-DIM	RP-LBI65-LC-24IN-DIM	RP-LBI65-LC-48IN-DIM		

PART #	DESCRIPTION	
RP-LBI65-IP-3FT	3 FT INCOMING POWER CABLE WIRE WHIP 	
RP-LBI-SSC-CCTDIM-10P	SEAMLESS CONNECTOR W/ CCT CCT IN-LINE SEAMLESS CONNECTOR 	
RP-LBI-SSC-NOCCTDIM-10P	NON-DIMMING SEAMLESS CONNECTOR AVAILABLE FOR NON-DIMMING AND NON-CCT CONTROL APPLICATIONS 	
RP-LBI65-IPC-12NPT-3FT	INCOMING POWER CONDUIT ADAPTER USED W/ CONDUIT TO HARDWIRE THE INCOMING POWER CABLE INTO FIXTURE OR JUNCTION BOX (3 FT OF WIRE INPUT INCLUDED) 	
RP-LBI65-SPND-SS-10FT (1 PACK) RP-LBI65-SPND-SS-10FT-2P (2 PACK)	STAINLESS STEEL, WATERPROOF AIRCRAFT SUSPENSION CABLE 	
RP-LBI65-EMG-40W	RP-LBI65-EMG-40W THE STREAMER STB27FC(A)-40WL LED EMERGENCY DRIVER IS UL LISTED FOR WET LOCATIONS. IT ALLOWS THE SAME LED LUMINAIRE TO BE USED FOR NORMAL AND EMERGENCY OPERATION, AND WORKS IN CONJUNCTION WITH AN AC LED DRIVER THAT CONVERTS NEW OR EXISTING LED FIXTURES INTO EMERGENCY LIGHTING. IT INCLUDES A WATERPROOF AND INDEPENDENT BATTERY PACK THAT CAN BE EASILY REPLACED BY HAND, AND FEATURES A STATUS SCREEN TO SHOW CHARGING, DISCHARGING, AND FAILURE. 	

LINKING QUANTITY

	120V	208V	240V	277V
4 FT	30 BARS	40 BARS	40 BARS	40 BARS
3 FT	40 BARS	40 BARS	40 BARS	40 BARS
2 FT	40 BARS	40 BARS	40 BARS	40 BARS

LINKING POSSIBILITIES

- Linking cables will lower connectable quantities.
- The linking numbers are based on using the LBI 65 conduit adapter and connected end to end.
- If linking cables are used when powered on 120VAC, linking number is reduced to 24pcs.
- Linking does not include 0-10V linked control. This will depend on the controlling device.