




- Easy-to-install Emergency Backup solution for T8 fixtures
- 1900-2000 lumen output under normal conditions
- 500 lumen output for 90 minutes when in Emergency Backup mode
- Direct wire installation on 120-277 VAC line voltage
- Meets UL 924 when permanently installed
- Frosted glass allows for uniform illumination and softer light output
- Non-dimmable
- Suitable for use in dry or damp locations. Not for use in vapor tight fixtures

 **FLEXCOLOR®**
SWITCH BETWEEN 5 CCTs



----- INTEGRATED EMG

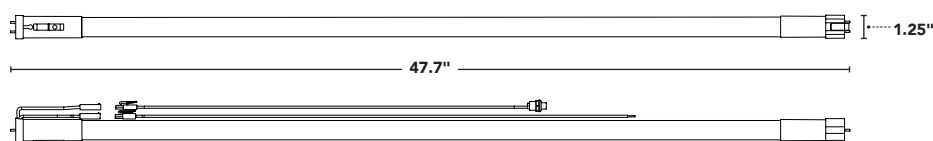

PART #	UPC	WATTAGE	LUMENS	EMG LUMENS	EMG TIME	CCT	BASE
LED-15T8-FC48-EMG	197810035497	15W	1900-2000	500	> 90MIN	FLEXCOLOR 3000K/3500K/4000K/ 5000K/6500K	G13

DEFAULT CCT IS SHOWN IN BOLD

