

# FROSTED POST TOP RETROFITS 360° OMNI DIRECTIONAL DESIGN



 <b>120-277V</b> VOLTAGE	 E26/EX39 MEDIUM + MOGUL BASES	 UL TYPE B BALLAST BYPASS INSTALL METHOD	 -40°F TO 122°F OPERATING TEMP	 ACTIVE COOLING	 6kA SURGE PROTECTION	 80+ CRI	 L70 50,000 RATED LIFE	 5 YEAR WARRANTY
--	--	---	---	--	--	---	--	--

## softer ambience



LED-8046M

runs cooler so it lasts longer


- Available in 45W & 65W models replacing up to 320W HID.
- Advanced active cooling. Energetic cooling fan & dynamic temp control supports a longer, brighter life.
- Multi-directional mounting capability & 360° design. Use base down, base up or base sideways without affecting performance.
- Pretested & potted drivers are burnt in 3x prior to shipping and protected against vibration & moisture.
- Expertly engineered to work efficiently in enclosed fixtures & damp environments, while also protected against insects & dust.
- Dual stage MOV protection with integrated 6kA surge.
- USA designed & specified LED driver.

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)	BASE
LED-8024E40-FR	844006023836	250W	45W	5950	4000K	E26
LED-8046M40-FR	844006023843	320W	65W	8550	4000K	EX39



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013  
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949  
 847.380.3540 • led-llc.com

# FROSTED POST TOP RETROFITS 360° OMNI DIRECTIONAL DESIGN

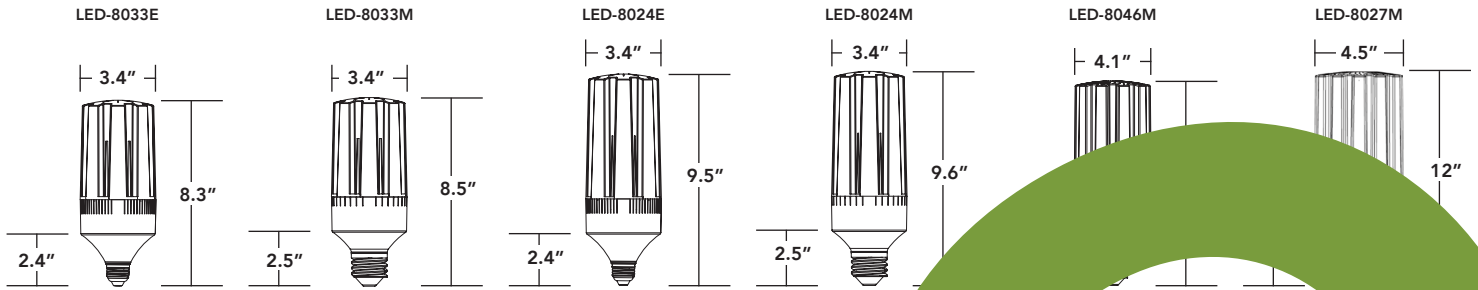

## ORDERING GUIDE

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)	BASE
LED-8033E30-A	844006081102	175W HID	35W	4239	3000K	E26
LED-8033E40-A	844006080570	175W HID	45W	5468	4000K	E26
LED-8033E57-A	844006081119	175W HID	65W	5617	5700K	E26
LED-8033M30-A	844006083328	175W HID	35W	4550	3000K	EX39
LED-8033M40-A	844006083342	175W HID	45W	5237	4000K	EX39
LED-8033M57-A	844006083366	175W HID	65W	5237	5700K	EX39
LED-8024E30-A	844006080724	175W HID	45W	4662	3000K	E26
LED-8024E40-A	844006080748	175W HID	45W	5879	4000K	E26
LED-8024E57-A	844006080249	175W HID	45W	6646	5700K	E26
LED-8024M30-A	844006080549	175W HID	45W	4933	3000K	EX39
LED-8024M40-A	844006080167	175W HID	45W	5930	4000K	EX39
LED-8024M57-A	844006080532	175W HID	65W	6632	5700K	EX39
LED-8046M30-A	844006081751	320W HID	65W	8450	3000K	EX39
LED-8046M40-A	844006081768	320W HID	65W	9587	4000K	EX39
LED-8046M57-A	844006081775	320W HID	65W	9499	5700K	EX39
LED-8027M30-A	844006080372	400W HID	100W	12486	3000K	EX39
LED-8027M40-A	844006080174	400W HID	100W	14666	4000K	EX39
LED-8027M57-A	844006080273	400W HID	100W	14613	5700K	EX39

### 120V/277V OPTIONS FOR CANADA



PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)	BASE
LED-8033E30-A	80844006081024	175W HID	35W	4740	3000K	E26
LED-8033E40-A	80844006081024	175W HID	45W	5671	4000K	E26
LED-8033E57-A	80844006081031	175W HID	65W	5537	5700K	E26
LED-8033M30-A	80844006083332	175W HID	35W	4550	3000K	EX39
LED-8033M40-A	80844006083356	175W HID	45W	5237	4000K	EX39
LED-8033M57-A	80844006083370	175W HID	65W	5237	5700K	EX39
LED-8024E30-A	80844006080775	250W HID	45W	5879	3000K	E26
LED-8024E40-A	80844006080782	250W HID	45W	6600	4000K	E26
LED-8024E57-A	80844006080799	250W HID	45W	6646	5700K	E26
LED-8024M30-A	80844006080805	250W HID	45W	5856	3000K	EX39
LED-8024M40-A	80844006080812	250W HID	45W	6740	4000K	EX39
LED-8024M57-A	80844006080829	250W HID	45W	6818	5700K	EX39
LED-8046M30-A	80844006081727	320W HID	65W	8471	3000K	EX39
LED-8046M40-A	80844006081802	320W HID	65W	9619	4000K	EX39
LED-8046M57-A	80844006081819	320W HID	65W	9440	5700K	EX39
LED-8027M30C-A	80844006080898	400W HID	100W	13304	3000K	EX39
LED-8027M40C-A	80844006080904	400W HID	100W	14736	4000K	EX39
LED-8027M57C-A	80844006080911	400W HID	100W	14349	5700K	EX39



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013  
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949  
 847.380.3540 • led-llc.com

07.01.20 Information is subject to change without notice.