

LEDAL G2 LED AREA LIGHT | SHOE BOX STYLE FIXTURE



VOLTAGE




DIMMING



EFFICACY



OPERATING TEMP



PWR FACTOR/THD



OPTIONAL MOTION SENSOR



WIND CERT.



RATED LIFE



WARRANTY

highest-in-class LPW



400L

extremely durable powder coat resists fading & peeling

- Patented “v-groove” bracket mounting allows for a fast and easy installation. V-groove self-locks onto the fixture.
- Superior standard 15kV surge protection.
- Optional fixture integrated high/low motion sensor with remote control to adjust settings.
- 7-pin NEMA receptacle included standard. Compatible with all photocells (standard and dimmable) and wireless control systems.
- Easy-to-secure clips to access the driver box does not require any screws or tools.



200L, 270L, 330L



75L, 120L, 140L

STOCK ITEMS

PART #	UPC	REPLACES	WATTAGE	LUMENS	LPW	CCT (K)
RPT-P-LEDAL-G2-140L-840-STD-T3-DB	844006010263	400W MH system	100	13,584	135	4000K
RPT-P-LEDAL-G2-330L-840-STD-T3-DB	844006010379	1000W MH system	240	31,306	130	4000K
RPT-P-LEDAL-G2-400L-840-STD-T3-DB	844006010416	1200W MH system	300	39,268	130	4000K

*See page 2 configurable specification sheet for additional styles, lumen packages, color temperatures and options.



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

07.01.20 Information is subject to change without notice.

LEDAL G2 LED AREA LIGHT | SHOEBOX STYLE FIXTURE

PART NUMBER BUILDER

MFR	CLASS	PRODUCT	GEN	LUMENS	COLOR	OPTIONS	OPTICS	COLOR
RPT	P	LEDAL	G2		840	STD	T3	

ORDERING EXAMPLE
FIXTURE RPT-P-LEDAL-G2-75L-840-STD-T3-DB
BRACKET RP-AL-BKT-A-DB-G2

75L=7,500 Lumens
120L=12,000 Lumens
140L=14,000 Lumens
200L=20,000 Lumens
270L=27,000 Lumens
330L=33,000 Lumens
400L=40,000 Lumens

830=80CRI/3000K
840=80CRI/4000K
850=80CRI/5000K

STD= 7-pin NEMA socket receptacle
PC= Photocell
OCC= Motion Sensor ***See Note**
PC-OCC= Photocell & Motion
HV= High Voltage (347-480)
HVPC= High Voltage & Photocell
HVOCC= High Voltage & Motion

T3=T3 optic
T4=T4 optic
T5=T5 optic

DB=Dark Bronze
LG=Light Gray


NOTE: FOR PROPER DAYLIGHT SENSING, PLEASE USE THE OPTIONAL PHOTOCELL (PC). DO NOT ATTEMPT TO USE THE DAYLIGHT FEATURE ON THE OCC SENSOR FOR THIS FUNCTION
PLEASE NOTE, BRACKETS SOLD SEPARATE, WHEN ORDERING LIST BRACKET ON SEPARATE LINE. ONE BRACKET PER FIXTURE REQUIRED.

ORDERING GUIDE

CASE QTY	QUICK SHIP	DLC	REMPHOS PART #	UPC CODE	LED MODULES	LUMEN @4000K	LPW @4000K	LUMEN @5000K	LPW @5000K	WATTAGE	WARRANTY	REPLACES	EPA RATting
1		●	RPT-P-LEDAL-G2-75L-840-STD-T3-DB	844006010454	1	7,324	143	7,868	153	51	10	200W MH system	1.72 ft²
1		●	RPT-P-LEDAL-G2-120L-840-STD-T3-DB	844006010232	1	10,259	131	11,046	140	78	10	300W MH system	1.72 ft²
1	●	●	RPT-P-LEDAL-G2-140L-840-STD-T3-DB	844006010263	1	13,584	135	13,584	135	100	10	400W MH system	1.72 ft²
1		●	RPT-P-LEDAL-G2-200L-840-STD-T3-DB	844006024406	2	20,700	138	20,700	138	150	10	600W MH system	2.73 ft²
1		●	RPT-P-LEDAL-G2-270L-840-STD-T3-DB	844006024420	2	24,807	130	26,523	138	191	10	800W MH system	2.73 ft²
1	●	●	RPT-P-LEDAL-G2-330L-840-STD-T3-DB	844006010379	2	31,306	130	31,306	130	240	10	1000W MH system	2.73 ft²
1	●	●	RPT-P-LEDAL-G2-400L-840-STD-T3-DB	844006010416	3	39,268	130	39,268	130	300	10	1200W MH System	3.23 ft²

MOUNTING BRACKETS

REMPHOS PART #	DESCRIPTION
RP-AL-BKT-A-DB-G2	Adjustable Slip-Fitter Bracket, Dark Bronze
RP-AL-BKT-B-DB-G2	Square and Round Pole Bracket, Dark Bronze
RP-AL-BKT-C-DB-G2	Trunnion Bracket, Dark Bronze
RP-AL-BKT-F-DB-G2	Wall Mount Bracket, Dark Bronze




A
Adjustable Slip-Fitter Bracket



B
Square and Round Pole Bracket



C
Trunnion Bracket



F
Wall Mount Bracket

OPTIONAL FACTORY INSTALLED PHOTOCELL



FULL ANSI C136.41 7 PIN DIMMING RECEPTACLE SUPPORT




LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

LEDAL G2


LED AREA LIGHT | SHOEBOX STYLE FIXTURE




75L, 120L, 140L

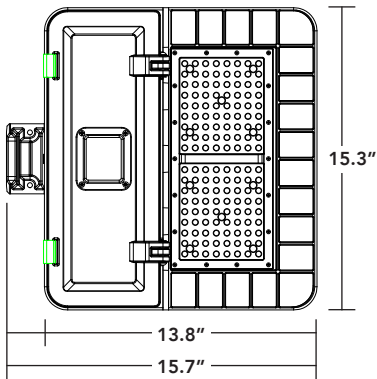


200L, 270L, 330L

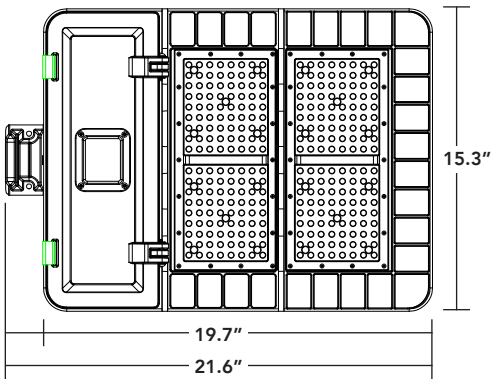


400L

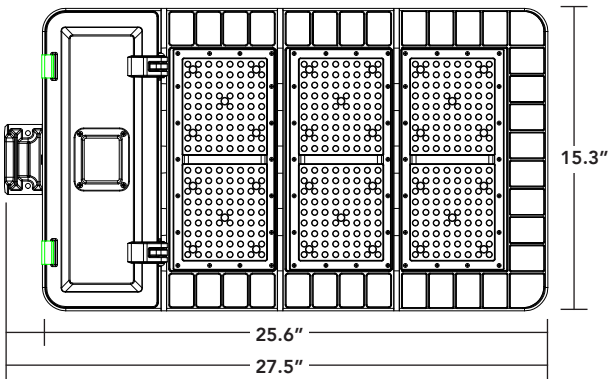


ALL MODELS

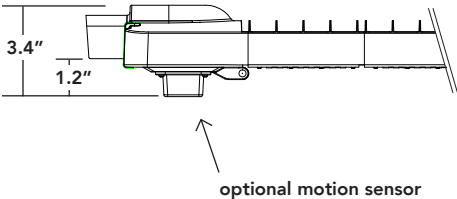

PHOTOMETRICS

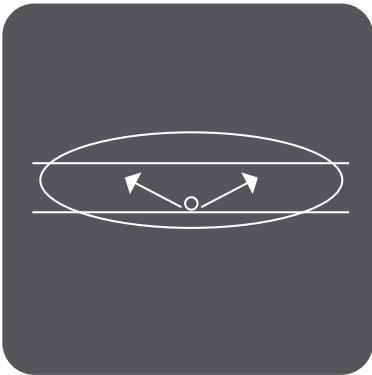

T3

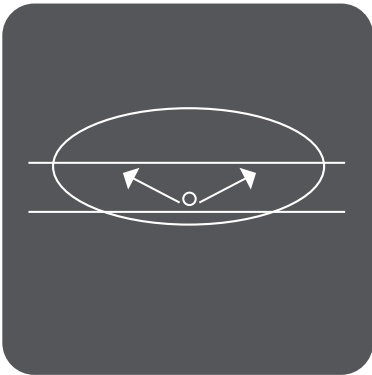

T4




T5



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

LEDAL G2

LED AREA LIGHT | SHOEBOX STYLE FIXTURE

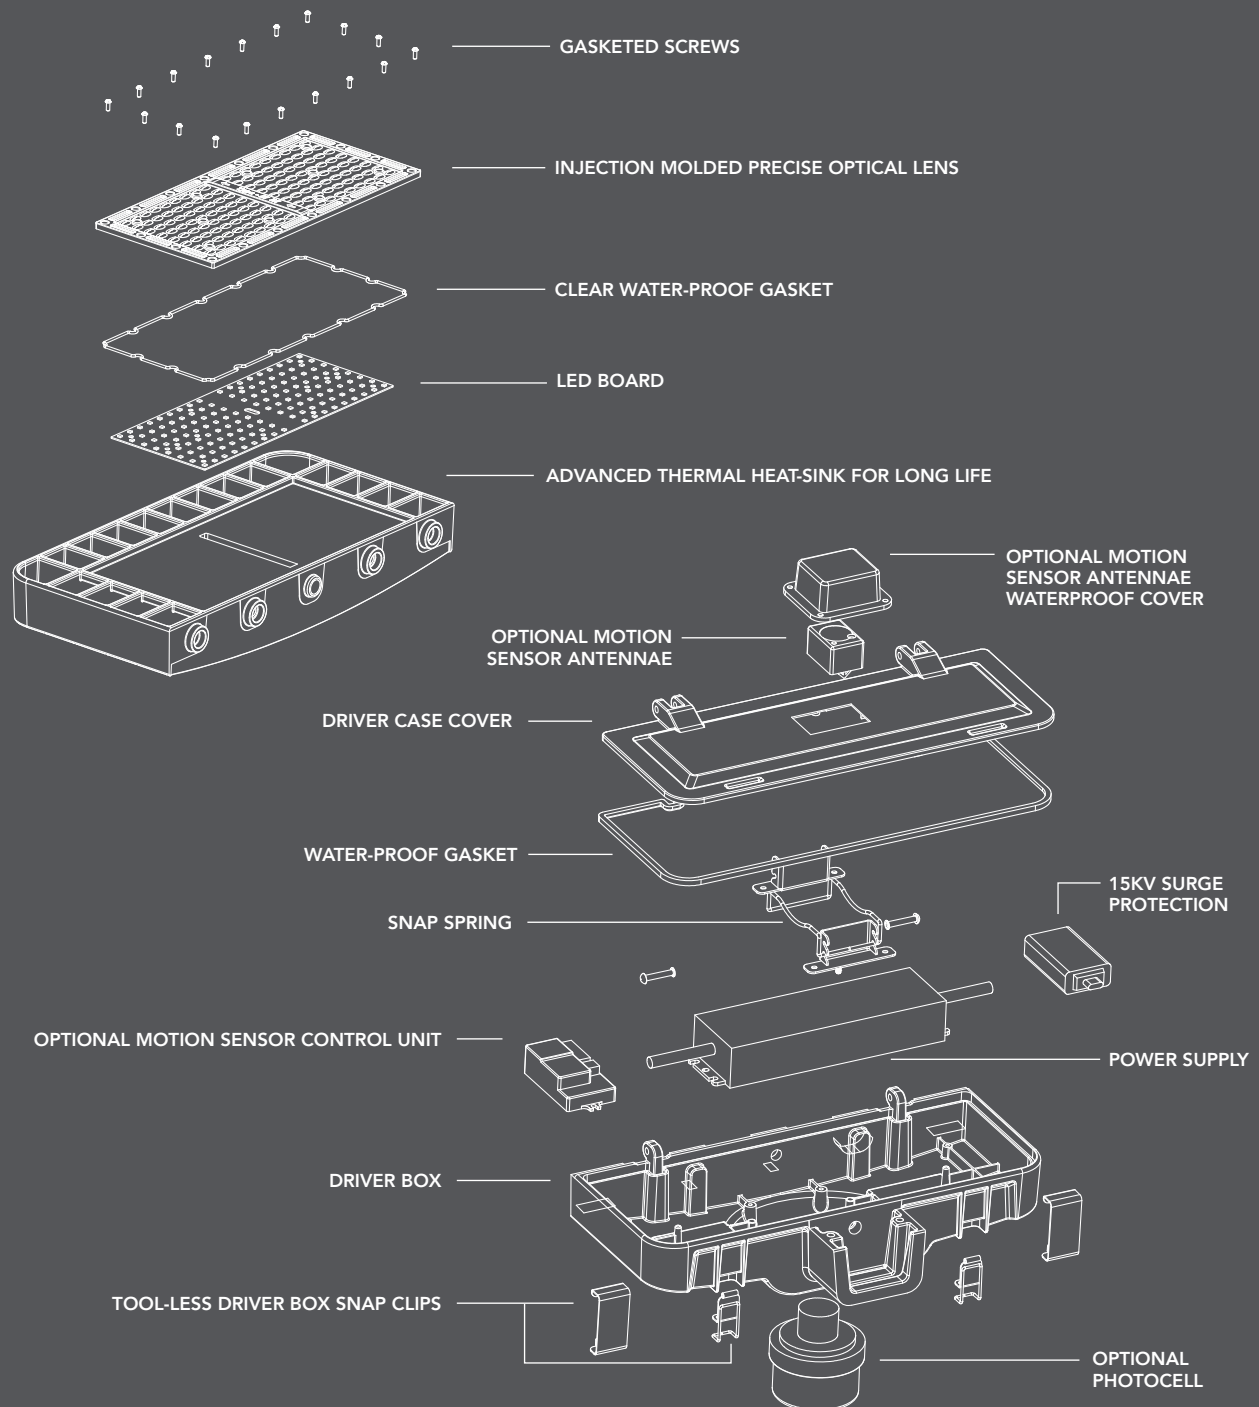

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
 847.380.3540 • led-llc.com

07.01.20 Information is subject to change without notice.