



## RETROFIT FLUORESCENT T5s W/ LONG-LASTING, ENERGY-SAVING LED T5s.


Every size and installation method you need — in the highest-quality, best light-output design.

- Ballast Bypass Only - Operates on 120-277VAC single or double-ended power
- Available in 2 FT, 3 FT and 4 FT lengths
- Shatter-resistant glass construction and frosted lens
- Suitable for dry and damp locations
- UL classified retrofit listed

**FLEXCOLOR**  
SWITCH BETWEEN 4 CCTs



**SHATTER-RESISTANT GLASS LENS**

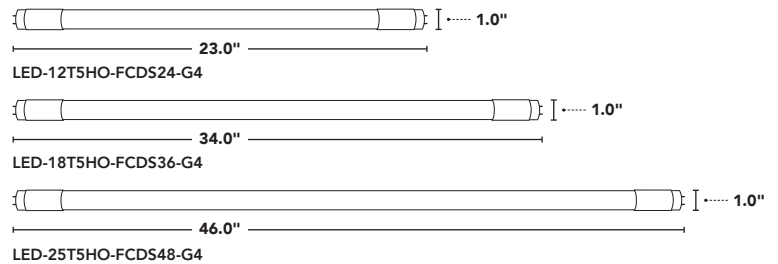

BASE TYPE



BALLAST BYPASS



CRI



BEAM ANGLE



-4°F TO 113°F

OPERATING TEMP



50,000hrs RATED LIFE

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT	BASE	DLC CODE
LED-12T5HO-FCDS24-G4	197810036050	24W	12W	1600	FLEXCOLOR 3000K/3500K/ 4000K/5000K	G5 MINI BI-PIN	N/A
LED-18T5HO-FCDS36-G4	197810036043	39W	18W	2370			PENDING
LED-25T5HO-FCDS48-G4	197810036036	54W	25W	3330			

