


T8 RETROFITS

BALLAST COMPATIBLE - TYPE A - DOUBLE-ENDED POWER



VOLTAGE



INSTALL METHOD



BEAM ANGLE



LIGHT DISTRIBUTION



OPERATING TEMP



NATIONAL SANITATION FOUNDATION



CRI




RATED LIFE



WARRANTY

easiest installation

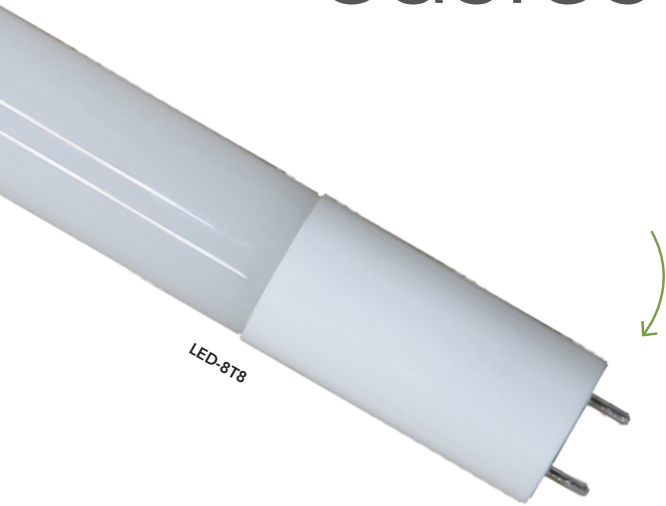

LED-8T8

- 8W, 10W, 12W & 15W models.
- Available in 2ft, 3ft & 4ft lengths.
- 3000K, 3500K, 4000K & 5000K color options.
- Beautiful uniform illumination from our glass construction.
- Frosted lens softens the light output.
- Approved for installation in completely enclosed fixtures.



LED-15U6-840BC-G3



PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)	BASE	LENGTH	QUICK SHIP
LED-8T8-840BC24-G3	844006022716	17W	8W	1250	4000K	G13	2 FT	●
LED-10T8-840BC36-G3	844006022754	25W	10W	1450	4000K	G13	3 FT	●
LED-12T8-840BC48-G3	844006022792	32W	12W	1800	4000K	G13	4 FT	●
LED-15T8-840BC48-G3	844006022839	32W	15W	2200	4000K	G13	4 FT	●
LED-15U6-840BC-G3	844006024253	32W	15W	2200	4000K	2G13	2 FT	●

* All models intended to replace T8 fluorescent lamps of the same length.





* See page 2 for additional color temperatures.



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
 847.380.3540 • led-llc.com

12.14.20 Information is subject to change without notice.

T8 RETROFITS BALLAST COMPATIBLE - TYPE A

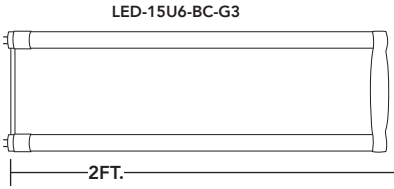

PART NUMBER BUILDER

MFR	WATTAGE	PRODUCT	CCT	TECHNOLOGY	LENGTH (IN)	GENERATION
LED		T8		BC		G3
	8		830=3000K/85CRI		24	
	10		835=3500K/85CRI		36	
	12		840=4000K/85CRI		48	
	15		850=5000K/85CRI			

ORDERING EXAMPLE
LED-8T8-840BC24-G3

ORDERING GUIDE

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)	BASE	LENGTH	QUICK SHIP	DLC CODES
LED-8T8-830BC24-G3	844006022693	17W	9W	1200	3000K	G13	2 FT		PL9DP9FQEFFO
LED-8T8-835BC24-G3	844006022709	17W	9W	1200	3500K	G13	2 FT		PL15QXQ2UMX6
LED-8T8-840BC24-G3	844006022716	17W	9W	1250	4000K	G13	2 FT		PL519N6JTCVG
LED-8T8-850BC24-G3	844006022723	17W	9W	1250	5000K	G13	2 FT		PL65VJ7NJ6GQ
LED-10T8-830BC36-G3	844006022730	25W	12W	1400	3000K	G13	3FT		PLA9Y3Y08XFY
LED-10T8-835BC36-G3	844006022747	25W	12W	1400	3500K	G13	3FT		PL8JRJVHALI
LED-10T8-840BC36-G3	844006022754	25W	12W	1450	4000K	G13	3 FT		PLLR74HFO95I
LED-10T8-850BC36-G3	844006022761	25W	12W	1450	5000K	G13	3 FT		PL8R3A1NWRTN
LED-12T8-830BC48-G3	844006022778	32W	12W	1700	3000K	G13	3 FT		PLKUL294MB91
LED-12T8-835BC48-G3	844006022785	32W	12W	1700	3500K	G13	4 FT		PLI9KNB3HRNT
LED-12T8-840BC48-G3	844006022792	32W	12W	1800	4000K	G13	4 FT		PLN50W07F46C
LED-12T8-850BC48-G3	844006022808	32W	12W	1800	5000K	G13	4 FT		PLW1F5QEFND6
LED-15T8-830BC48-G3	844006022815	32W	15W	2100	3000K	G13	4 FT		PL50S3FM53H0
LED-15T8-835BC48-G3	844006022822	32W	15W	2100	3500K	G13	4 FT		PLUJ6IF5L4XZ
LED-15T8-840BC48-G3	844006022839	32W	15W	2200	4000K	G13	4 FT		PLCRRD4O4E24
LED-15T8-850BC48-G3	844006023846	32W	15W	2200	5000K	G13	4 FT		PLH23JURYC5OZ
LED-15U6-830BC-G3	844006024239	32W	15W	2100	3000K	2G13	2 FT		PLJTB9L35ADD
LED-15U6-835BC-G3	844006024246	32W	15W	2100	3500K	2G13	2 FT		PLEAE3AEWZW2
LED-15U6-840BC-G3	844006024253	32W	15W	2200	4000K	2G13	2 FT		PLDBBRUIE7G8
LED-15U6-850BC-G3	844006024260	32W	15W	2200	5000K	2G13	2 FT		PLY5N8W9E7PF



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
 847.380.3540 • led-llc.com

12.14.20 Information is subject to change without notice.