




Light Efficient Design

PIN-BASE
RETROFITS



TYPE B-DE T8 RETROFITS

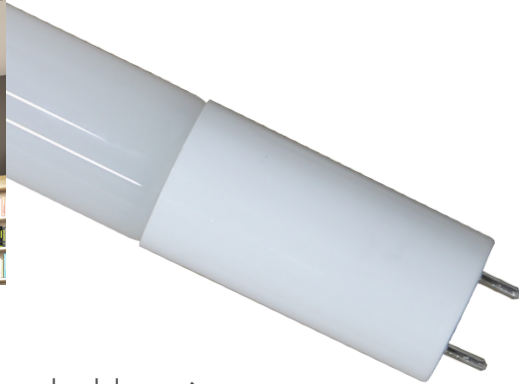

double ended power →

- 9W, 12W & 15W models.
- Available in 2ft, 3ft & 4ft
- 3500K, 4000K & 5000K color options.
- Beautiful uniform illumination from our glass construction.
- Frosted lens softens the light output.
- Approved for installation in completely enclosed fixtures.



**120/
277V**
ALSO WORKS
ON 208V & 240V

ULTYPE B
BALLAST
BYPASS
INSTALL
METHOD

240°
BEAM ANGLE

-40°F TO 113°F
OPERATING
TEMP

80+
CRI

L70
50,000hrs
RATED LIFE

330°
LIGHT
DISTRIBUTION

PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR (K)*	BASE	LENGTH
LED-9T8-840DE24-G3	844006022877	17W	9W	1150	4000K	G13	2 FT
LED-12T8-840DE36-G3	844006022914	25W	12W	1450	4000K	G13	3 FT
LED-12T8-840DE48-G3	844006022914	32W	12W	1800	4000K	G13	4 FT
LED-15T8-840DE48-G3	844006022990	32W	15W	2200	4000K	G13	4 FT

* All models intended to replace T8 fluorescent lamps of the same length

* Additional color temperatures shown on page 2





LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

11.11.22 Information is subject to change without notice.





TYPE B-DE T8 RETROFITS

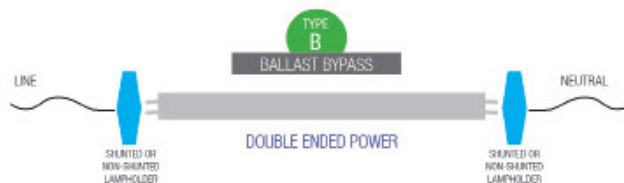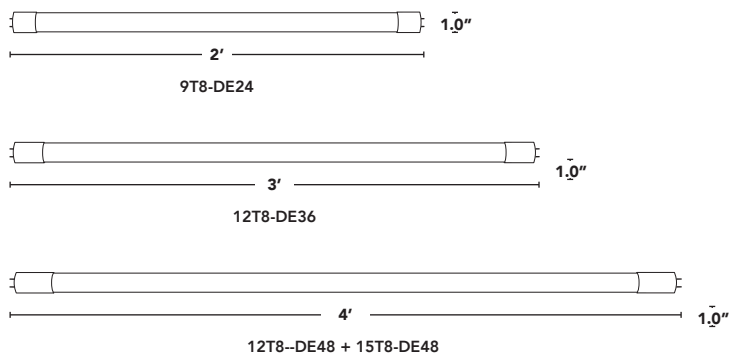

PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR (K)*	BASE	LENGTH	QUICK SHIP	DLC CODE
LED-9T8-835DE24-G3	844006022860	17W	9W	1100	3500K	G13	2 FT	✓	PLASS715ZPE1
LED-9T8-840DE24-G3	844006022877	17W	9W	1150	4000K	G13	2 FT	✓	PLEVKFK911PU
LED-9T8-850DE24-G3	844006022884	17W	9W	1150	5000K	G13	2 FT	✓	PLW4TU6Y2QIT
LED-12T8-835DE36-G3	844006022907	25W	12W	1400	3500K	G13	3 FT	✓	PLQQKIE4YDD0
LED-12T8-840DE36-G3	844006022914	25W	12W	1450	4000K	G13	3 FT	✓	PLY0S99SZY00
LED-12T8-850DE36-G3	844006022921	25W	12W	1450	5000K	G13	3 FT	✓	PLAU8Y96O653
LED-12T8-835DE48-G3	844006022945	32W	12W	1700	3500K	G13	4 FT	✓	PL9BCPB5RQXN
LED-12T8-840DE48-G3	844006022952	32W	12W	1800	4000K	G13	4 FT	✓	PLGQ84QERNPL
LED-12T8-850DE48-G3	844006022969	32W	12W	1800	5000K	G13	4 FT	✓	PLKIG8AC7NS0
LED-15T8-835DE48-G3	844006022983	32W	15W	2100	3500K	G13	4 FT	✓	PLPGS8M2RZ6G
LED-15T8-840DE48-G3	844006022990	32W	15W	2200	4000K	G13	4 FT	✓	PLX9009P5UDR
LED-15T8-850DE48-G3	844006023003	32W	15W	2200	5000K	G13	4 FT	✓	PL46RL2LB2C8