





T5 RETROFITS BALLAST BYPASS - TYPE B - DOUBLE-ENDED POWER




easier to install

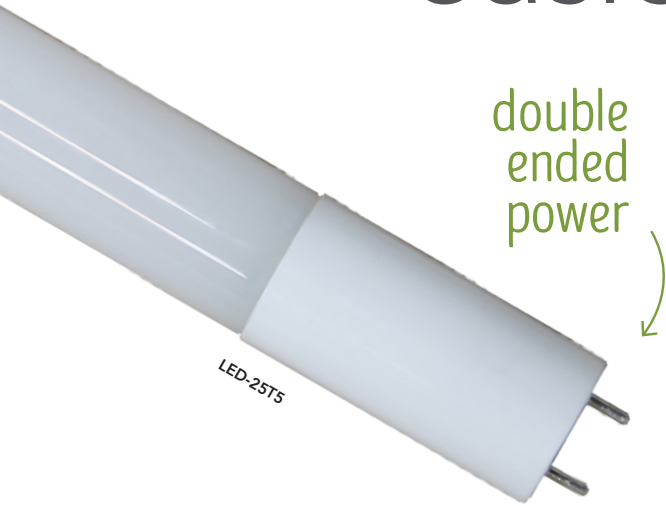

double ended power

- 25W models.
- Available in 4ft length.
- 3000K, 3500K, 4000K & 5000K color options.
- Beautiful uniform illumination from our glass construction.
- Patented integrated electrical safety switch for the safest possible double ended install.
- Frosted lens softens the light output.

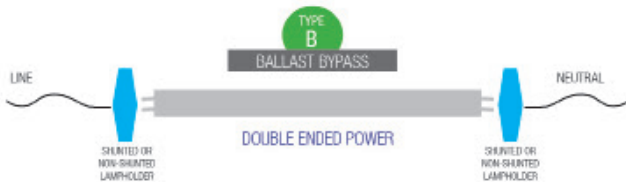

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)	BASE	LENGTH	QUICK SHIP	DLC CODES
LED-25T5HO-835DE48-G3	844006023164	54W	25W	3300	3500K	G5	4 FT	●	PL33NSUY2R71
LED-25T5HO-840DE48-G3	844006023171	54W	25W	3500	4000K	G5	4 FT	●	PLESCHOFBQ3Y
LED-25T5HO-850DE48-G3	844006023188	54W	25W	3500	5000K	G5	4 FT	●	PL1KVV3B0XOA

* All models intended to replace T5 fluorescent lamps of the same length.




LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
 847.380.3540 • led-llc.com

07.01.20 Information is subject to change without notice.

T5 RETROFITS

BALLAST BYPASS - TYPE B



PART NUMBER BUILDER

MFR	WATTAGE	PRODUCT	CCT	TECHNOLOGY	LENGTH (IN)	GENERATION
LED	25	T5HO		DE	48	G3

830=3000K/85CRI
835=3500K/85CRI
840=4000K/85CRI
850=5000K/85CRI

ORDERING EXAMPLE
LED-25T5HO-840DE48-G3



LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com