## **RemPhos**BASE

**FIXTURES** 

# LINEAR LED STRIP FIXTURE

FlexCOLOR switch on each unit  $\checkmark$ 

OLOR choose from 3 different color temperatures

CONTROL

order without controls, with basic sensor, or advanced Bluetooth mesh control





ALSO WORKS ON 208V & 240V



SENSOR READY 12V AUX



BEAM ANGLE





occ







-> Ability to daisy chain mulitple

-> OCC option comes with an integrated

-> Two installation options: suspended &

-> flexCOLOR allows for a reduction in

-> Great for schools, hospitals, grocery stores, offices & warehouses.

-> Rated for damp environments.

fixtures together.

microwave sensor.

surface mounted.

stocked skus.







OPERATING TEMP

50,000hrs RATED LIFE

PART #	UPC	WATTAGE	LUMENS	FLEXCOLOR	DLC CODE LINEAR AMBIENT	DLC CODE STAIRWELL
RP-B-LS-2FT-25L-840-FC	844006061258	20W	2670	3500K/ <b>4000K</b> /5000K	PGUXC6L5	PO0C7Y78
RP-B-LS-2FT-25L-840-FC-OCC*	844006061265	20W	2670	3500K/ <b>4000K</b> /5000K	PGUXC6L5	PO0C7Y78
RP-B-LS-4FT-40L-840-FC	844006061319	32W	4250	3500K/ <b>4000K</b> /5000K	PIP65N0N	P6GRIQ3D
RP-B-LS-4FT-40L-840-FC-OCC*	844006061326	32W	4250	3500K/ <b>4000K</b> /5000K	PIP65N0N	P6GRIQ3D




LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013 INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949 847.380.3540 • led-llc.com



\* Microwave occupancy sensor

03.20.23 Information is subject to change without notice.

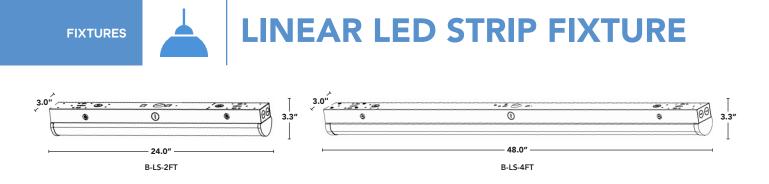

### -> parts & accessories

#### SURACE/CEILING MOUNT CONTINUOUS RUN BRACKETS

Use the surface/ceiling mount continuous run brackets to create strong and straight junctions between two fixtures. Continuous run kits include: in-line Bracket, AC wiring, wire nuts.

PART #	UPC	DESCRIPTION
RP-B-LS-CR-SM-2FT	844006061432	2FT CONTINUOUS RUN SURFACE MOUNT BRACKETS
RP-B-LS-CR-SM-4FT	844006061449	4FT CONTINUOUS RUN SURFACE MOUNT BRACKETS


#### SUSPENDED MOUNT CONTINUOUS RUN BRACKETS

Use the suspended mount continuous run brackets to create strong and straight junctions between two suspended fixtures. Continuous run suspended kits include: 4ft aircraft cable (2x), ceiling anchors, in-line Bracket, AC wiring, wire nuts.

PART #	UPC	DESCRIPTION
RP-B-LS-CR-SPND KIT-2	844006061463	2FT CONTINUOUS RUN SUSPENDED MOUNT BRACKETS
RP-B-LS-CR-SPND KIT-4	844006061470	4FT CONTINUOUS RUN SUSPENDED MOUNT BRACKETS

#### SUSPENDED KIT FOR SINGLE FIXTURE

Use the single fixture suspended kit to suspend one fixture from the ceiling. Continuous run suspended kits include: 4ft aircraft cable (2x), ceiling anchors, in-line Bracket, AC wiring, wire nuts.



-> RP-B-LS is also compatible with the following sensors

Standard Occupancy Sensor (-OCC) Limited Rage Sensor (-OCCLR) Simple Grouping Sensor (-OCCRF)

