



- Replace CFL lamps w/ long-lasting, energy efficient LEDs.
- Replaces up to 26W 2-Pin CFL lamps.
- Easily switch between CCTs via a switch on the lamp.
- Up to 1200 lumen output.
- Suitable for damp environments.
- Operates on existing magnetic ballasts or 120-277 VAC.
- See page 2 for dimensions and base types.

FLEXCOLOR SWITCH BETWEEN CCTs



BASE TYPE



OPEN FIXTURES



CRI



OPERATING TEMP




50,000hrs RATED LIFE

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT	MOUNTING	BASE
LED-7310-FC-G4	197810015345	26W 2 Pin	9W	1104-1243	FLEXCOLOR 2700K/3000K/ 3500K/4000K	↕↔	G24D
LED-7313-FC-G4	197810015314	9W 2 Pin	3.5W	389-428			G23
LED-7314-FC-G4	197810015321	13W 2 Pin	5.5W	628-696	FLEXCOLOR 3000K/ 3500K/4000K	↔↔	GX23
LED-7311-FC1-G4	197810018889	26W 2 Pin	7W	900-950			G23-2
LED-7312-FC1-G4	197810018896						GX23-2
LED-7322-FC1-G4	197810018902						G24D





DIMENSIONS

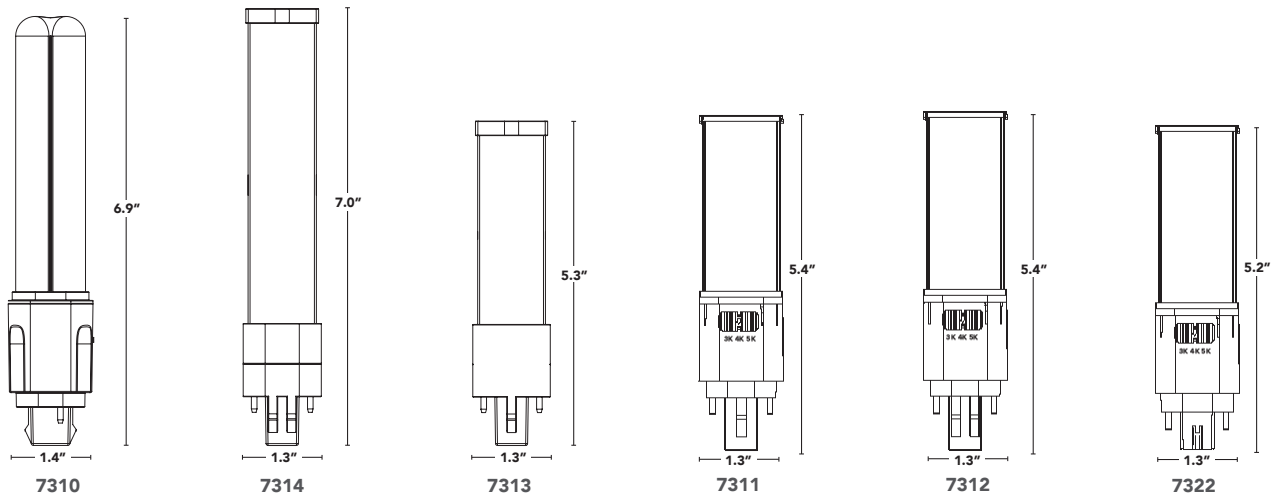

BASE TYPES

