


PIN-BASE
RETROFITS



HYBRID TOTALTUBE T5 G4 CAN BE USED WITH OR WITHOUT A BALLAST



shatterproof ↑
glass lens

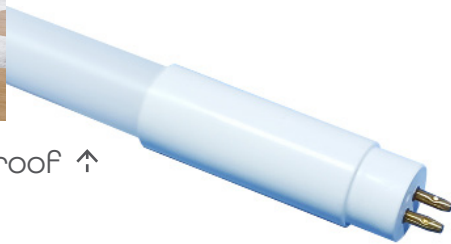

- > 2 methods of installation (UL Type A + B).
- > Can use with a ballast or bypass the ballast.
- > Single or double ended.
- > New wide 240° beam angle.
- > Available in 2 ft, 3ft & 4ft lengths.
- > Suitable for dry & damp locations.
- > Shatterproof glass construction.
- > Frosted lens.
- > UL classified retrofit listed.
- > 5 year standard warranty, L70 > 50,000 HRS.
- > For dimmable options, use our Type C Tubes.



**120/
277V**
ALSO WORKS
ON 208V & 240V

UL TYPE B
BALLAST
BYPASS
INSTALL
METHOD

UL TYPE A
BALLAST
COMPATIBLE
**INSTALL
METHOD

80+
CRI

240°
BEAM ANGLE

-4°F TO 113°F
OPERATING
TEMP

**<15%
THD**
>0.99
PWR FACTOR

L70
50,000hrs
RATED LIFE

PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR*	BASE
RP-TOTALTUBE-T5-2FT-840-G4	844006079864	24W FL	12W	1500	4000K	G5
RP-TOTALTUBE-T5-3FT-840-G4	844006079895	39W FL	18W	2250	4000K	G5
RP-TOTALTUBE-T5-4FT-840-G4	844006079925	54W FL	24W	3500	4000K	G5




* additional color temperatures shown on page 2

** ballast compatibility list shown on page 3





TOTALTUBE T5 G4



Maximum number of lamps per circuit is 40 units. Product is designed to operate on standard electrical systems, and may be incompatible with unconventional electrical systems. Please see installation instructions for more details.

PART #	UPC	REPLACES	WATTAGE	LUMENS	COLOR	BASE
RP-TOTALTUBE-T5-2FT-835-G4	844006079857	24W FL	12W	1350	3500K	G5
RP-TOTALTUBE-T5-2FT-840-G4	844006079864	24W FL	12W	1500	4000K	G5
RP-TOTALTUBE-T5-2FT-850-G4	844006079871	24W FL	12W	1500	5000K	G5
RP-TOTALTUBE-T5-3FT-835-G4	844006079888	39W FL	18W	2025	3500K	G5
RP-TOTALTUBE-T5-3FT-840-G4	844006079895	39W FL	18W	2250	4000K	G5
RP-TOTALTUBE-T5-3FT-850-G4	844006079901	39W FL	18W	2250	5000K	G5
RP-TOTALTUBE-T5-4FT-835-G4	844006079918	54W FL	24W	3200	3500K	G5
RP-TOTALTUBE-T5-4FT-840-G4	844006079925	54W FL	24W	3500	4000K	G5
RP-TOTALTUBE-T5-4FT-850-G4	844006079932	54W FL	24W	3500	5000K	G5



HYBRID TOTALTUBE T5 G4

BALLAST COMPATIBILITY LIST

RP-TOTALTUBE-T5-2FT-8XX-G4

BRAND	MODEL
AMAX	HD8/13-120A
KEYSTONE	KTEB-108-1-TP-TP-FC /L
KEYSTONE	KTEB-113-1-TP-SN-MB/A
KEYSTONE	KTEB-114-1-TP-TP-FC /P
KEYSTONE	KTEB-213-1-TP-SL-MB
UNIVERSAL	B228PUNV-C

RP-TOTALTUBE-T5-3FT-8XX-G4

BRAND	MODEL
AMAX	HD8/13-120A
GE	GE254MVPS90-A-L
KEYSTONE	KTEB-108-1-TP-TP-FC /L
KEYSTONE	KTEB-114-1-TP-TP-FC /P
KEYSTONE	KTEB-213-1-TP-SL-MB
PHILIPS ADVANCE	ICN-2S54-90C-N
PHILIPS ADVANCE	ICN-2S54-N
PHILIPS ADVANCE	ICN-2S54-T
UNIVERSAL	B228PUNV-C
UNIVERSAL	B254PUNV-D
UNIVERSAL	B454PUNVHB-E

RP-TOTALTUBE-T5-4FT-8XX-G4

BRAND	MODEL
ESPEN	VE254MVHRP11101
ESPEN	VE454MVHRP11088
GE	GE254MVPS90-A-L
GE	GE254MVPS-D-1
GE	GE454PS347/480-E
OSRAM	QTP 2X54T5HO/347-480 PSN HT
PHILIPS ADVANCE	HCN-2S54-90C-WL
PHILIPS ADVANCE	ICN-2S54-90C-N
PHILIPS ADVANCE	ICN-2S54-90C-T
PHILIPS ADVANCE	ICN-2S54-N
PHILIPS ADVANCE	ICN-2S54-T
PHILIPS ADVANCE	ICN-4S54-90C-2LS-G